



ΩDBK Typhoon 60

60mm axial fan PTC heating element, with cage clamp connection


Specification					
Type Number	Typhoon 60				
Nominal Power Output (+5/-10%) at 10°C (50°F)	200W	250W	300W	400W	500W
Nominal Input Voltage	115 VAC 240 VAC				
Article No. 115VAC 240 VAC	32013.11 32023.11	32413.11 32423.11	32113.11 32123.11	32213.11 32223.11	32313.11 32323.11
Max. body temperature (25°C Ambient)	74°C (165°F)				
Operating & Storage Temperature range	-40°C to 70°C [40°F to 158°F] (<20% RH)				
Fan Lifetime (MTTF)	329,447hrs (30°C 65%RH)				
Fan volumetric flow rate at zero static pressure	30m3/hr (18 CFM)				
Dimensions (Cross section)	63 x 63mm (2.5" x 2.5")				
Dimensions (Length)	93mm (3.7")				
Weight	367g (12.95oz)				
Connection (Cage Type)	Push In (AWG 14-18)				
Ingress Protection (EN60529)	IP20				
Protection Class	SKII				



Connections

Pos 1 Heater, Live
Pos 2 Neutral
Pos 3 Fan, Live

Note: Heater ideally mounted vertically with air exit at the top

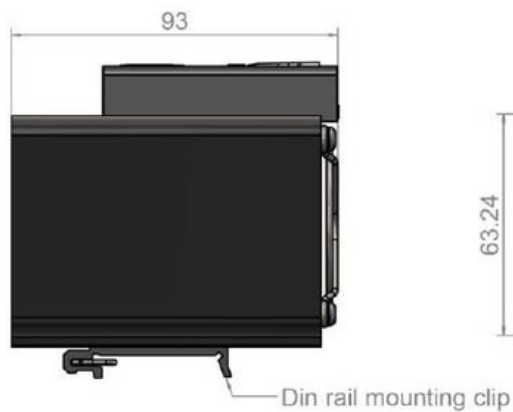



Blizzard 200H 100W 100-240V



Self Regulating PTC Heater

Prepared: 25/7/2018

Specification	
Type No.	Blizzard 200H 100W 100-240V
Article Number	1110012
Article Number with Diffuser	TBD
Nominal Power W (+5/-10% , 10°C)	100W
Input Voltage Element V	100-240V
Suggested Fuse (time delay) A	7.0A
Operating Temperature	- 40 C ... 70 C (RH<20%)
Length L (mm)	158
Length L (mm) with Diffuser	166
Ingress Protection	IP20
Electrical Protection Class	SKII
Mounting	35mm DIN rail clip



with Diffuser

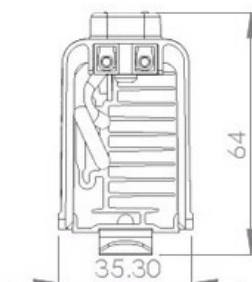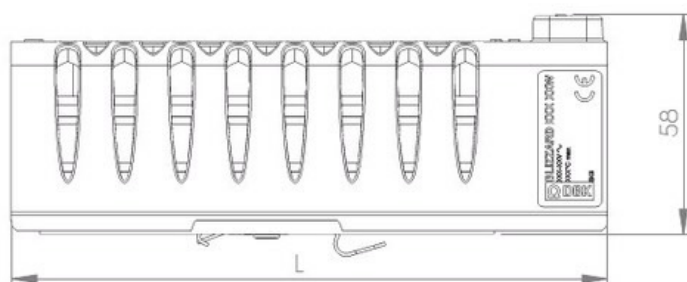

DRAFT

1009/201802