

LOCKOUT RELAY



Features

- Auxiliary relay of high speed automatic trip/manual operated reset type by external signal.
- Operation state can be verified by naked eyes due to red or green trip display in operation.
- Block contact, divided by two type AC 250V 30A, and DC 125V 20A has wide-availability with high capacity.
- Handle has various types of R, E, P, O and elegant appearance.
- Easy for various contact composition.

Rating


Contact part	AC	Rating voltage	250V	600V
		Rating current	30A	20A
	DC	Rating voltage	125V	220V
		Rating current	20A	10A
	Rating conductive current		30A	

Coil part	AC	110V/220V 50Hz/60Hz
	DC	110V/125V

For DC 20A, permanent magnet is attached.


Refer to Cam Switch (20A, 30A) for part materials and performance.

Type Classification diagram

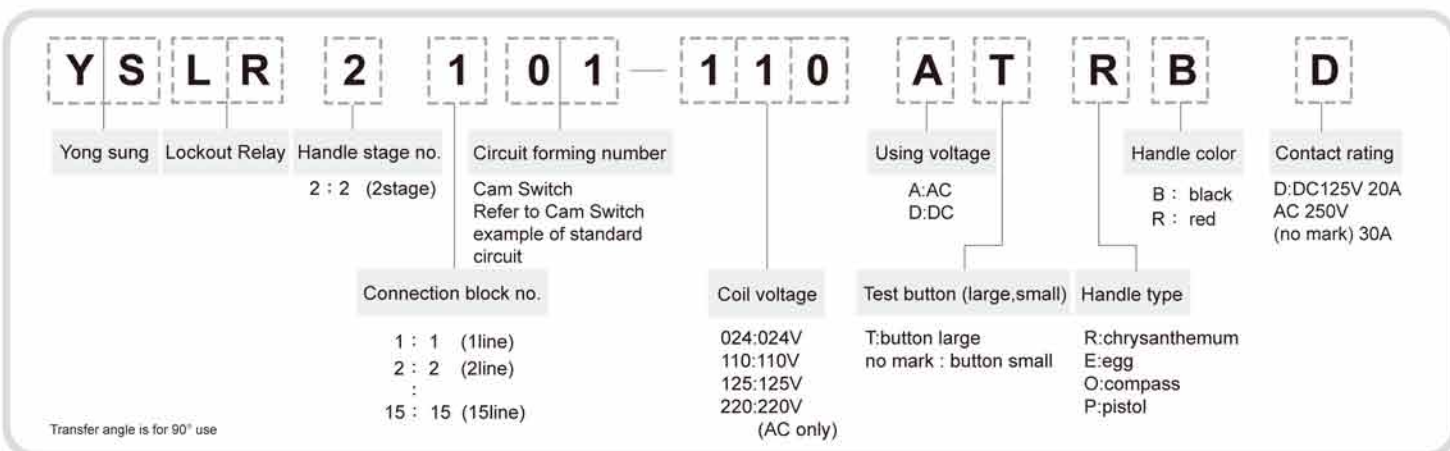


Shape/Dimension Drawing (unit=mm)

Large Button Type

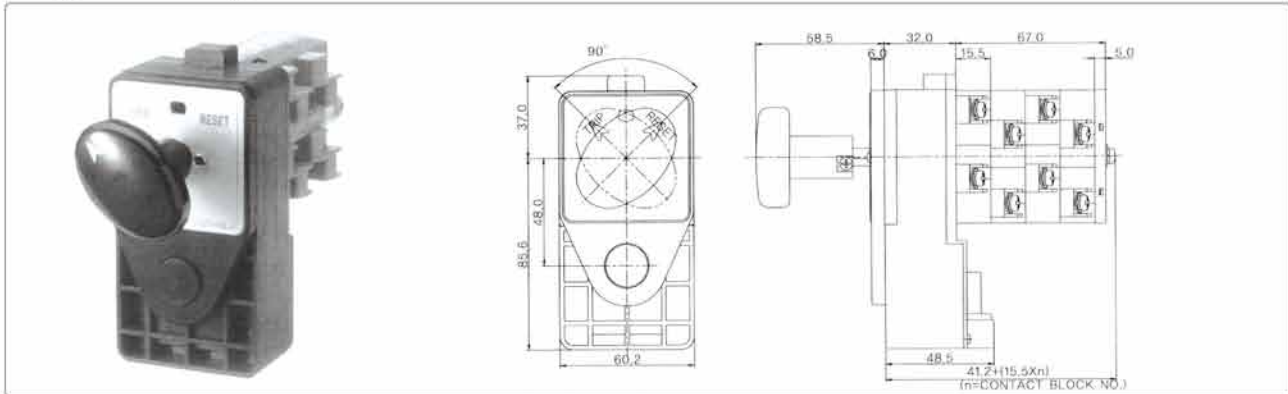


Small Button Type

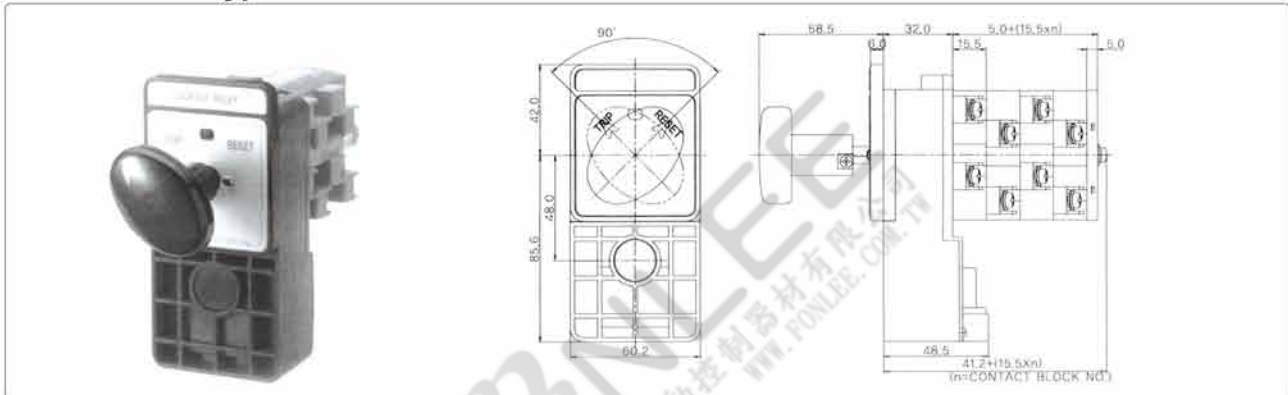


Standard surface plate


Test Button (Large Test Button)



Test Button (Small Test Button)



Panel attachment dimension

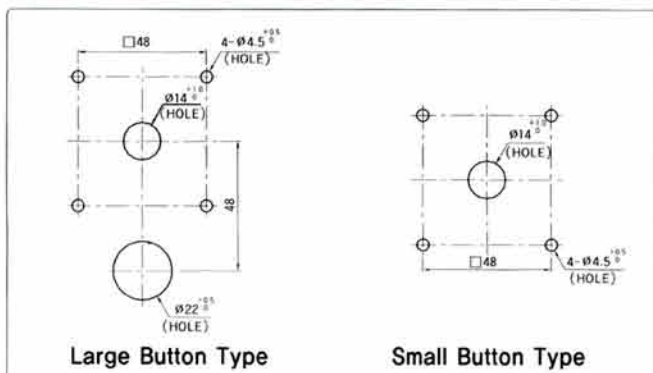

Connection diagram

