

CM Series CM系列

- Subminiature size metal shell construction
- Threaded coupling and gold plated contacts
- Cost effective for instrument application
- Solder contacts and molded on wire options







No. of contacts 接點數及電氣規格：

CM1： 3, 4, 5 (pins) 2A / 125V



Series 規格系列	CMxA Box Mounting w/Hex Nut 面板座		CMxP-10 Straight Plug 套環型接線接頭 (配管不含線)	
Contact	Male (公)	Female (母)	Male (公)	Female (母)
Connector Style 外型式樣				
Outer Dimension of Connector 外型尺寸				
	A	B	C	D
CM1	9.5	6.6	17.8	10.0

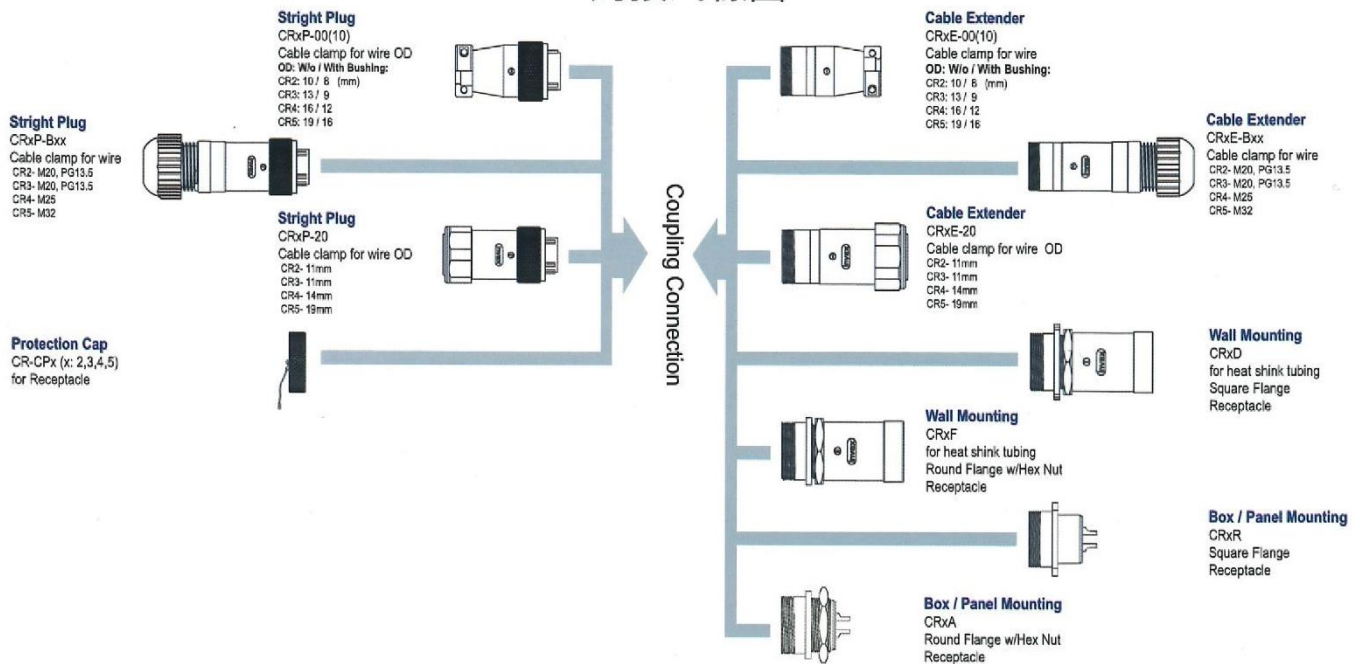
* Dimensions subject to change without notice.

CMxE-10 Cable Extender 延長型接線接頭 (配管不含線)				CMxP-MD Straight Plug (w/Molding Cable Molding) 套環型接線接頭 (含線成型)				CMxE-MD Cable Extender (w/Molding Cable) 延長型接線接頭 (含線成型)			
Male (公)		Female (母)		Male (公)		Female (母)		Male (公)		Female (母)	
											
											
A	B	C	D	A	B	C	D	A	B	C	D
9.5	44.5	4.0	6.6	7.5	16.0	4.0	11.4	9.5	16.0	4.0	6.6

FONLEE
豐立自動控制器材有限公司
WWW.FONLEE.COM.TW

CR Series --Mating Styles Configuration

對接式樣圖



Part No. Code : 型號編碼表

CR Series	CR 2 P - 07 A P N S - 10 CR Series Shell Size : 2,3,4,5 本體大小 Connector Type P : Straight Plug R : Receptacle Box Mount Screw Flange (D: with backshell for heatshrink tubing) A : Receptacle w/Hex Nut Flange (F: with backshell for heatshrink tubing) E : Cable Extender 外型式樣 Contact No. 接點數 Contact Type P : Male S : Female 公母接點 Insert Arrangement : A - Z 接點排列及規格形式 Alternate Position N : Normal W.X.Y.Z : Front face of pin insert rotation W:60° X:120° Y:240° Z:300° (CR only) 接點旋轉角度 Shell Finish S : Silver Color B : Black Color 外殼顏色 Cable Clamp Type 00 : STD Cable Clamp 10 : Clamp with Bushing 20 : Flex. Conduit Type B20 : M20 Plastic Clamp Black (CR2/CR3) G20 : M20 Plastic Clamp Gray (CR2/CR3) W20 : M20 Plastic Clamp White (CR2/CR3) B25 : M25 Plastic Clamp Black (CR4) G25 : M25 Plastic Clamp Gray (CR4) W25 : M25 Plastic Clamp White (CR4) B32 : M32 Plastic Clamp Black (CR5) 尾部接線式樣
------------------	--