

RI[®]
C US

- No. of contacts** 接點數及電氣規格：





CR2: 2, 3 (pins) 15A / 250V
4, 7 10A / 250V

CR3 : 10 (pins) 10A / 250V
16 4A / 250V

CR4 : 12, 16, 17(pins) 8A / 250V
20, 26 4A / 250V


CR5: 24 (pins) 8A / 250V



CRxP-20 Straight Plug (For flexible conduit) 套環型接線接頭 (浪管式)				CRxE-20 Cable Extender (For flexible conduit) 延長型接線接頭 (浪管式)				CRxP-Bxx Straight Plug (w/plastic cable gland clamp) 套環型接線接頭 (追緊束線式)				CRxE-Bxx Cable Extender (w/plastic cable gland clamp) 延長型接線接頭 (追緊束線式)			
Male (公)		Female (母)		Male (公)		Female (母)		Male (公)		Female (母)		Male (公)		Female (母)	
															
															
A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
16.0	57.5	11.3	25.5	21.8	56.5	11.3	23.5	16.0	78.4	12.0	27.0	21.8	77.8	12.0	27.0
20.5	62.5	11.3	30.0	25.8	62.8	11.3	27.0	20.5	84.5	12.0	27.0	25.8	85.0	12.0	27.0
24.5	62.5	14.7	33.8	29.8	61.0	14.7	31.5	24.5	88.3	16.0	33.0	29.8	87.6	16.0	33.0
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

CR Series --Mating Styles Configuration

對接式樣圖

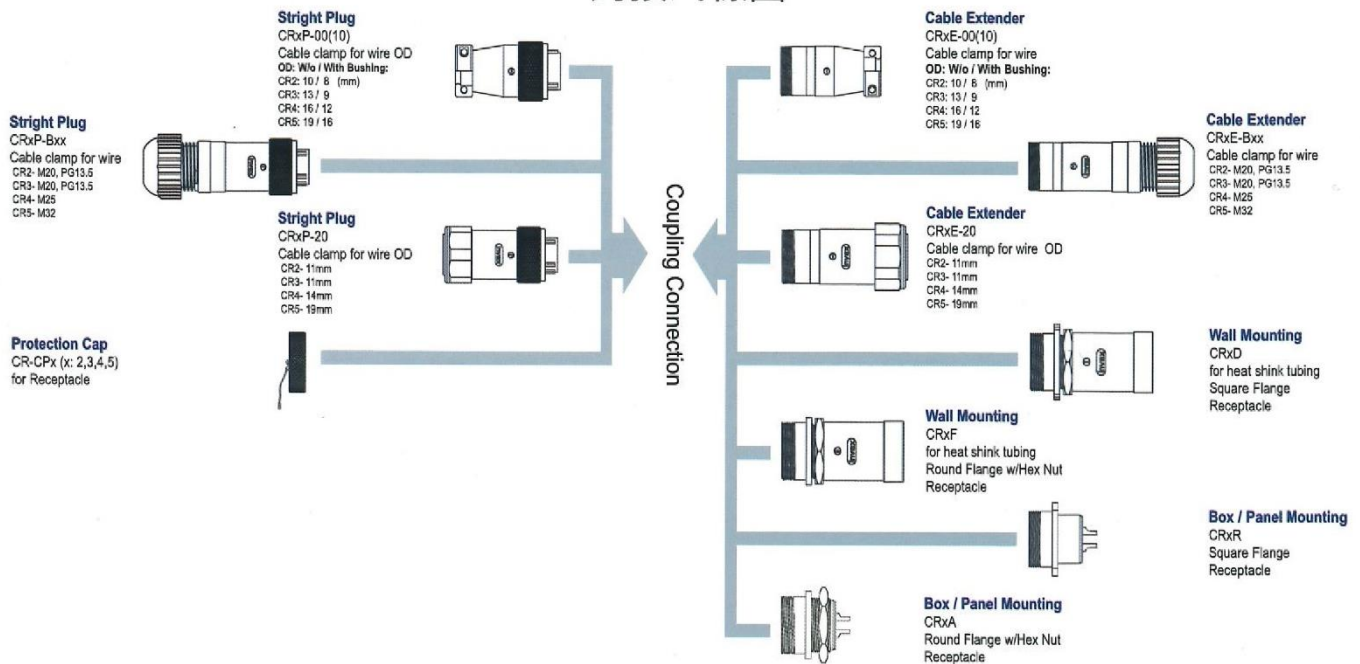

Part No. Code : 型號編碼表

CR Series	CR 2 P - 07 A P N S - 10 CR Series Shell Size : 2,3,4,5 本體大小 Connector Type P : Straight Plug R : Receptacle Box Mount Screw Flange (D: with backshell for heatshrink tubing) A : Receptacle w/Hex Nut Flange (F: with backshell for heatshrink tubing) E : Cable Extender 外型式樣 Contact No. 接點數 Contact Type P : Male S : Female 公母接點 Insert Arrangement : A - Z 接點排列及規格形式 Alternate Position N : Normal W.X.Y.Z : Front face of pin insert rotation W:60° X:120° Y:240° Z:300° (CR only) 接點旋轉角度 Shell Finish S : Silver Color B : Black Color 外殼顏色 Cable Clamp Type 00 : STD Cable Clamp 10 : Clamp with Bushing 20 : Flex. Conduit Type B20 : M20 Plastic Clamp Black (CR2/CR3) G20 : M20 Plastic Clamp Gray (CR2/CR3) W20 : M20 Plastic Clamp White (CR2/CR3) B25 : M25 Plastic Clamp Black (CR4) G25 : M25 Plastic Clamp Gray (CR4) W25 : M25 Plastic Clamp White (CR4) B32 : M32 Plastic Clamp Black (CR5) 尾部接線式樣
------------------	--