

CS Series CS系列





- Solid metal shell construction
- Threaded coupling hard dielectric inserts
- Cost effective for industrial grade application
- Front Key polarization
- Solder contact terminals
- UL certified

No. of contacts 接點數及電氣規格:

CS1:	2, 3, 4, 5, 6, 7, 8 (pins)	5A / 125V
CS2:	2, 3, 4 (pins)	7A / 250V
CS3:	2, 3, 4, 5, 6, 7 (pins)	10A / 250V
CS4:	2, 3, 4, 5, 7 (pins)	15A / 250V
CS5:	1 (pin)	250A / 250V
	2, 3 (pins)	30A / 250V
CS6:	4 (pins)	30A / 250V



Series 規格系列	CSxA Box Mounting Round Flange w/Hex Lock Nut 圓型面板座						CSxR Box Mounting (Screw Flange) 圓型面板座					
Contact	Male (公)						Male (公)			Female (母)		
Connector Style 外型式樣												
Outer Dimension of Connector 外型尺寸												
	A	B	C	D	E	F	A	B	C	D	E	F
CS1	15.7	5.4	20.5	18.3	14.5	15.7	—	—	—	—	—	—
CS2	—	—	—	—	—	—	33.0	25.0	120	25.5	3.3	18.9
CS3	—	—	—	—	—	—	42.2	27.5	120	33.5	3.3	24.9
CS4	—	—	—	—	—	—	46.0	29.3	120	38.0	3.3	30.0
CS5	—	—	—	—	—	—	51.0	35.5	120	42.0	3.3	32.0
CS6	—	—	—	—	—	—	58.0	36.6	120	50.0	3.3	40.0


CSxP Straight Plug 直插型接線接頭 (夾線式)				CS x E Cable Extender 延長型接線接頭 (夾線式)				CSxP-20 Straight Plug (For flexible conduit) 套環型接線接頭 (浪管式)				CS x E-20 Cable Extender 延長型接線接頭 (浪管式)			
Male (公)		Female (母)		Male (公)		Female (母)		Male (公)		Female (母)		Male (公)		Female (母)	
A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
12.5	18.0	6.6	36.0	15.7	17.8	6.6	43.8	—	—	—	—	—	—	—	—
15.5	22.0	9.0	43.0	—	—	—	—	—	—	—	—	—	—	—	—
21.1	27.7	10.8	50.3	24.8	28.7	10.8	57.4	21.1	27.7	11.3	60.0	24.8	28.7	11.3	60.2
25.6	33.0	12.0	54.8	29.0	34.0	12.0	63.5	25.6	33.0	11.3	60.0	29.0	34.0	11.3	65.3
27.7	38.0	15.5	64.5	—	—	—	—	—	—	—	—	—	—	—	—
35.0	46.0	16.4	69.0	—	—	—	—	—	—	—	—	—	—	—	—

CSxP-Bxx Straight Plug (w/plastic cable gland clamp) 套環型接線接頭 (塑膠束線式)				CS x E-Bxx Cable Extender 延長型接線接頭 (塑膠束線式)			
Male (公)		Female (母)		Male (公)		Female (母)	
A	B	C	D	A	B	C	D
—	—	—	—	—	—	—	—
21.1	27.7	12.0	84.1	24.8	28.7	12.0	86.0
25.6	33.0	12.0	90.2	29.0	34.0	12.0	92.0
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—

FONLEE
豐立自動控制器材有限公司
WWW.FONLEE.COM.TW

CR Series --Mating Styles Configuration

對接式樣圖

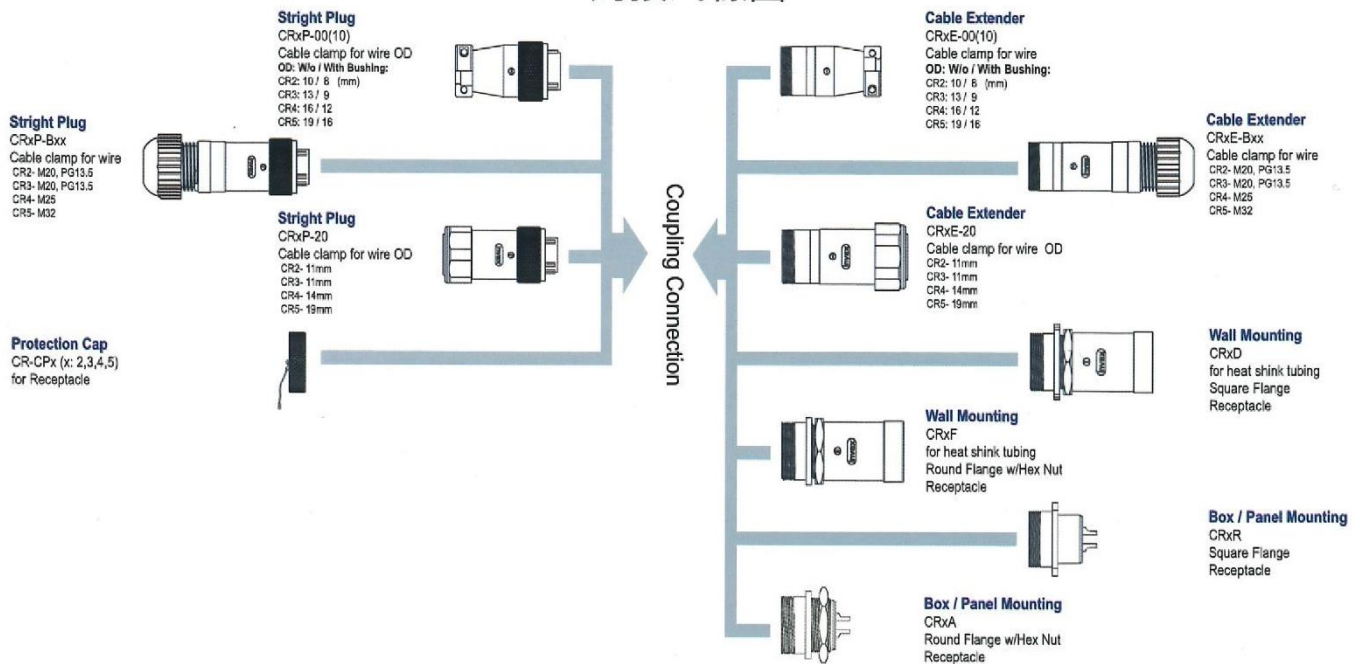

Part No. Code : 型號編碼表

CR Series	CR 2 P - 07 A P N S - 10 CR Series Shell Size : 2,3,4,5 本體大小 Connector Type P : Straight Plug R : Receptacle Box Mount Screw Flange (D: with backshell for heatshrink tubing) A : Receptacle w/Hex Nut Flange (F: with backshell for heatshrink tubing) E : Cable Extender 外型式樣 Contact No. 接點數 Contact Type P : Male S : Female 公母接點 Insert Arrangement : A - Z 接點排列及規格形式 Alternate Position N : Normal W.X.Y.Z : Front face of pin insert rotation W:60° X:120° Y:240° Z:300° (CR only) 接點旋轉角度 Shell Finish S : Silver Color B : Black Color 外殼顏色 Cable Clamp Type 00 : STD Cable Clamp 10 : Clamp with Bushing 20 : Flex. Conduit Type B20 : M20 Plastic Clamp Black (CR2/CR3) G20 : M20 Plastic Clamp Gray (CR2/CR3) W20 : M20 Plastic Clamp White (CR2/CR3) B25 : M25 Plastic Clamp Black (CR4) G25 : M25 Plastic Clamp Gray (CR4) W25 : M25 Plastic Clamp White (CR4) B32 : M32 Plastic Clamp Black (CR5) 尾部接線式樣
------------------	--