



# Communication interface connection

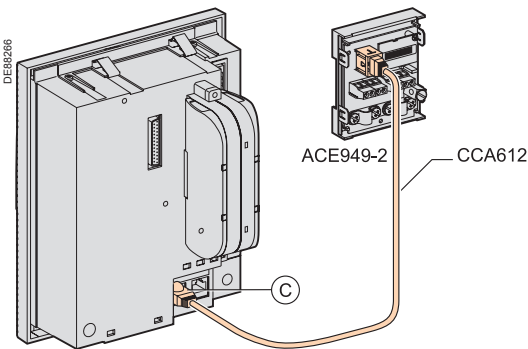

Sepam series 20 and Sepam series 40: 1 communication port.

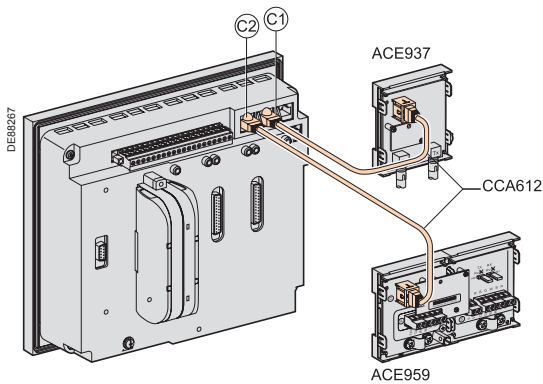

Sepam series 80 : 2 communication ports.

### CAUTION

**HAZARD OF DEFECTIVE COMMUNICATION**

- Never use both communication ports (C2) and (F) on a Sepam series 80 at the same time.
- The only communication ports that can be used simultaneously on a Sepam series 80 unit are ports (C1) and (C2) or ports (C1) and (F).

Failure to follow this instruction can result in equipment damage.

## CCA612 connection cord

### Function

The CCA612 prefabricated cord is used to connect ACE942-2, ACE959, ACE937, ACE969TP-2 and ACE969FO-2 communication interfaces:

- to the white communication port (C) on a Sepam series 20 or series 40 base unit, or
- to the white communication port (C1) on a Sepam series 60 base unit.
- to the white communication port (C1) or (C2) on a Sepam series 80 base unit.

### Characteristics

- Length = 3 m (9.8 ft)
- Fitted with 2 white RJ45 plugs.

## CCA614 connection cord


### Function

The CCA614 prefabricated cord can be used to connect ACE850TP and ACE850FO communication interfaces:


- to the white communication port (C) on a Sepam series 40 base unit, or
- to the blue communication port (F) on a Sepam series 60 or series 80 base unit.

### Characteristics

- Length = 3 m (9.8 ft)
- Fitted with 2 blue RJ45 connectors
- Minimum curvature radius = 50 mm (1.97 in)

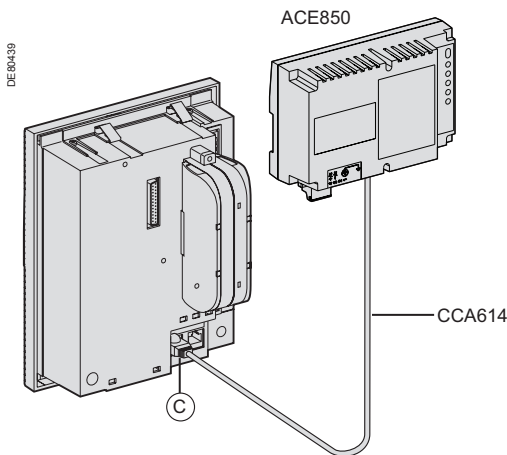

Sepam series 40

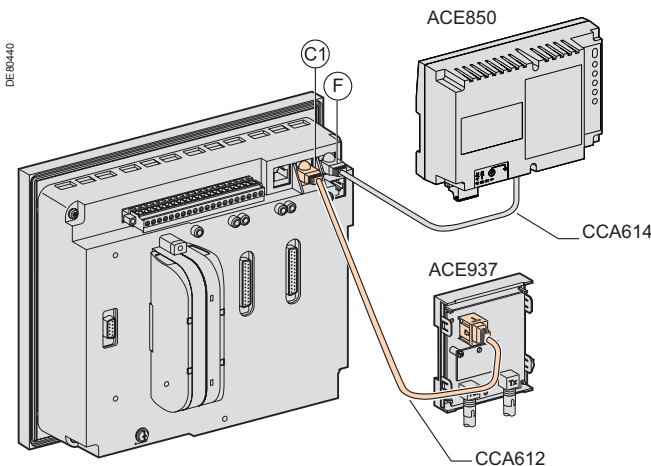

Sepam series 80