

DIGITAL POWER ON DELAY TIMER


SY/H5T series

Outline	50 x 60			48 x 48
Model	SY-2D	SY-3D	SY-4D	H5T-4D
Figure				
Range	0~99	0~999	0~9999	0~9999
Display	0.56" Red LED	0.56" Red LED	0.4" Red LED	0.36" Red LED
Weight	145g	150g	155g	160g
Unit	S, 0.1S, 0.01S, M, 0.1M, H or 0.1H Selectable			

Specification

Power Supply	12V or 24VDC/AC or 90~250 VAC 50/60 Hz	
Wattage	5VA max.	
Control Output	A	Two Limit Contact
	B	Limit & Instantaneous
Output Method	Relay 10A	
Control Method	Power ON Delay	
Timing Method	UP or Down Selectable	
Repetivity	0.1% of F.S	
Setting Accuracy	0.05% of F.S	
Reset Time	0.1S max.	
Reset Method	Power OFF Reset	
Insulation Strength	100 M Ω / 500 VDC	
Dielectric Strength	2.5KV / 1 min	
Circumstance	-20° ~ +60°C, 35 ~ 85% RH	
Life of Relay	20 X 10 ⁶ Times	

Timing Chart

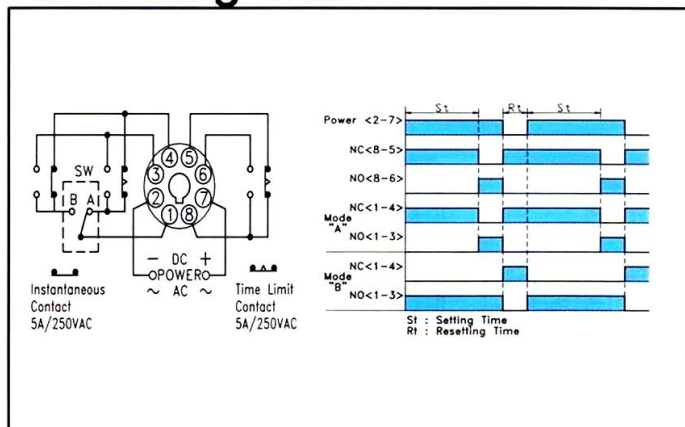

Illumination

Unit : S → 0.1S → 0.01S → M → 0.1M → H → 0.1H

< Push Key  To Select The Unit >

Slide Switch

LK : To Lock Unit Selecting N : Up Timer

UL : To Unlock Unit Selecting R : Down Timer

A : Time Limit Contact

B : Instantaneous Contact

Dimension Chart

