

ME-8 Series

Enclosed Basic Switch

◆ Features

- ✓ Basic switch with Plastic cover and Zinc alloy bottom enclosure.
- ✓ Dust, water, and oil resistant
- ✓ Strain relief suitable for SJT18/4 18AWG cables
- ✓ Field adjustable actuator heads

◆ Recognition(s)

- ✓ CE – EN60947
- ✓ UL – UL-508
- ✓ CCC – GB14048.5-2008
- ✓ RoHS Compliant
- ✓ Reach Unaffected



◆ Characteristics

Positive Opening	Electrical Contact	Terminal Type	Contact Form(s)	Poles & Throws	Actuation Sequence(s)
No	4 Points	Screw	Form Z	SPDT-NC-NO	Double Break(1) Double Make(2)

Operating Temp.	AC Rated	DC Rated	IP	Oil Resist	Dust Resist	Water Resist	Operating Speed
-15 to 70 Celsius	5A 250V	0.4A 115V	65	Yes	Yes	Yes	0.5mm to 50cm/sec


Operation Frequency	Contact Resistance	Insulation Resistance	Vibration
Mechanically: 120/min Electrically: 30/min	15mΩ max. (initial)	100MΩ min. (500VDC)	1.5mm amplitude at 10-55Hz

Storage Humidity	Service Life (min.)	Dielectric Strength
85% RH max	Mechanically: 10,000,000 operations Electrically: 300,000 operations	1000VAC, 50/60Hz for 1 minute between non-continuous terminals

Recommended tighteninging forces

Purpose	Screw type	Tightening
Mounting	M4	1.18~1.37 N·m
Enclosure cover		0.44±0.05 N·m
Screw terminal		0.25±0.05 N·m

Circuitry



◆ Materials


Actuation touch part	Electrical contact point	Enclosure
Nylon, or Stainless Steel, or Teflon	Silver 99.9%	Plastic top with Zinc alloy bottom

◆ Nomenclature

Series:	Actuator (and material):
ME –	8104
	8104 = Side rotary, nylon roller 8104-L = Side rotary, ø50mm rubber roller 8104-M = Side rotary, metallic roller 8107 = Side rotary, adjustable metallic rod 8108 = Side rotary, adjustable nylon roller 8108-L = Side rotary, adjustable ø50mm rubber roller 8108-M = Side rotary, adjustable metallic roller 8111 = Metallic plunger 8112 = Metallic roller plunger 8112-P = Nylon roller plunger 8112-PT = Teflon roller plunger 8122 = Cross metallic roller plunger 8122-P = Cross nylon roller plunger 8122-PT = Cross Teflon roller plunger 8166 = Metallic spring coil with nylon tip 8169 = Metallic spring coil with wire tip 9101 = Metallic spring coil 9101-HI = Metallic spring coil with solid stainless-steel tip

◆ Dimensions & Operating Characteristics

*Measurements in millimeters

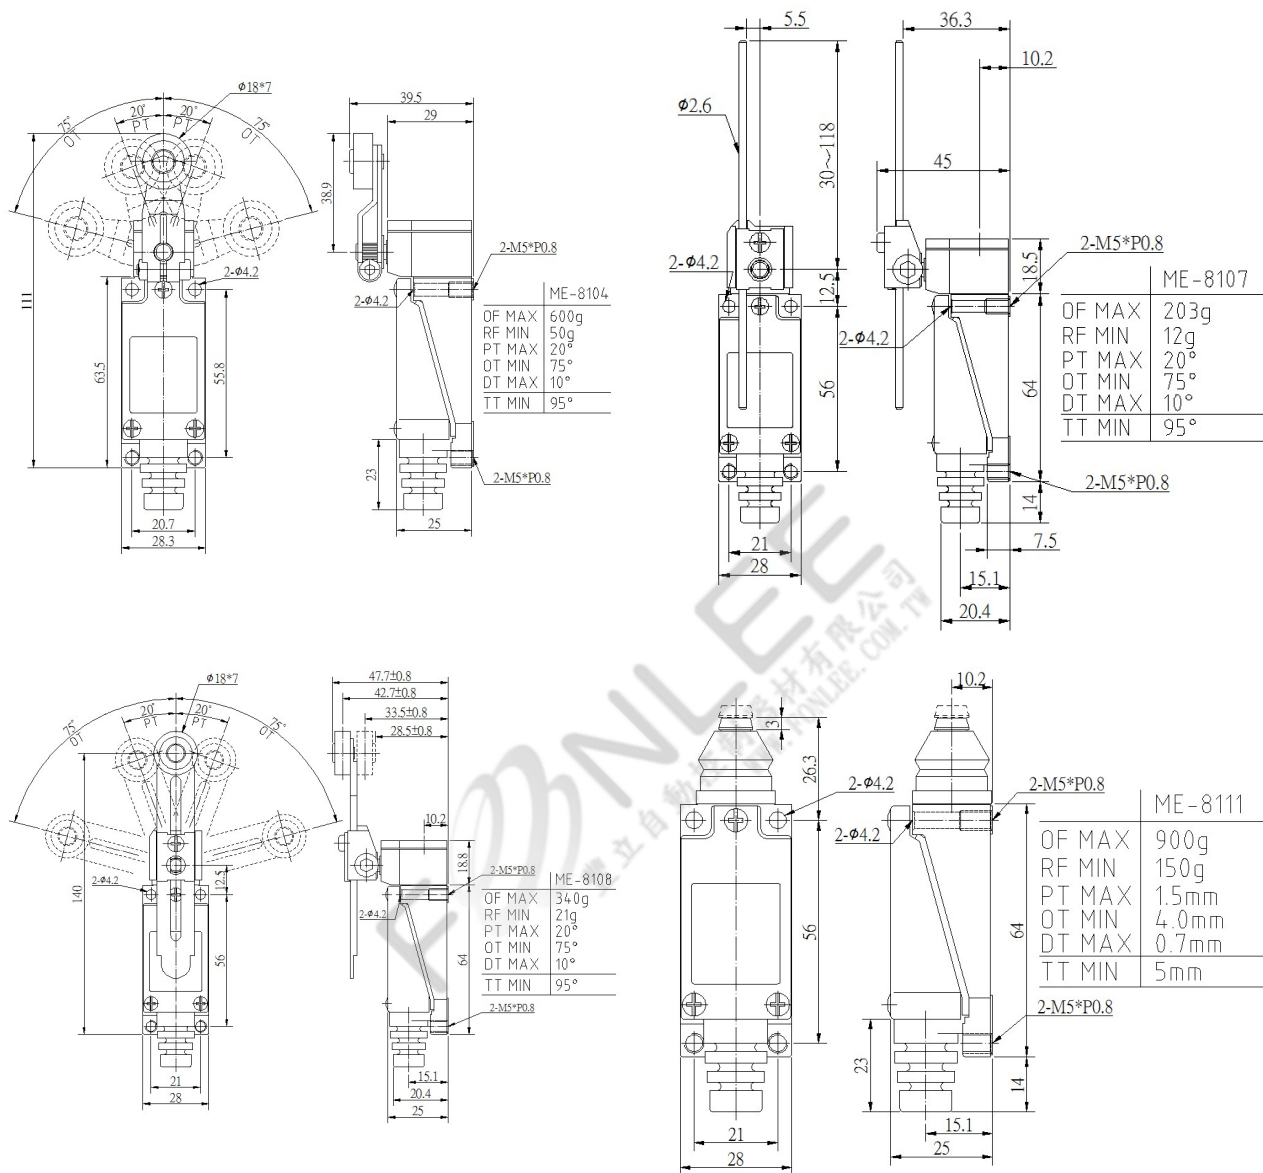

ME-8104







ME-8107



ME-8108



ME-8111

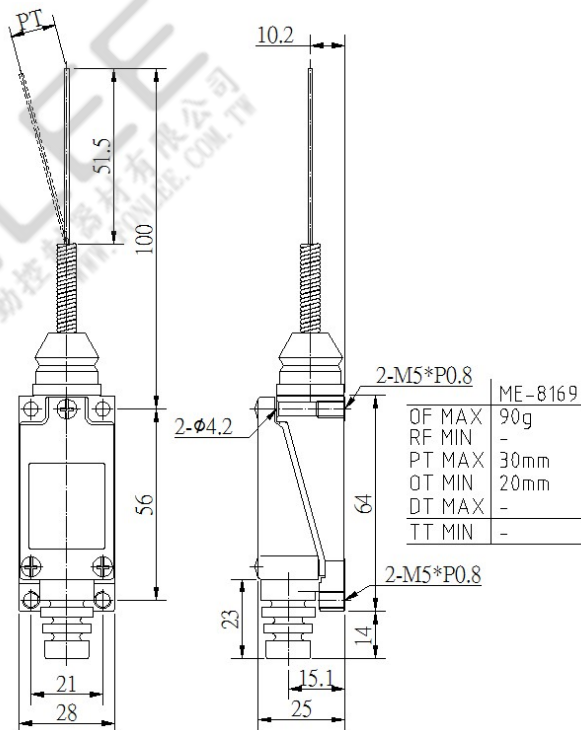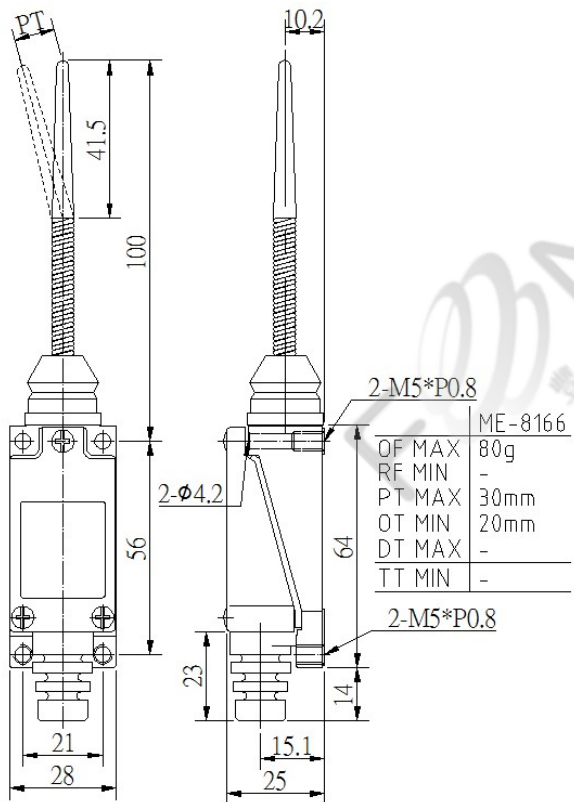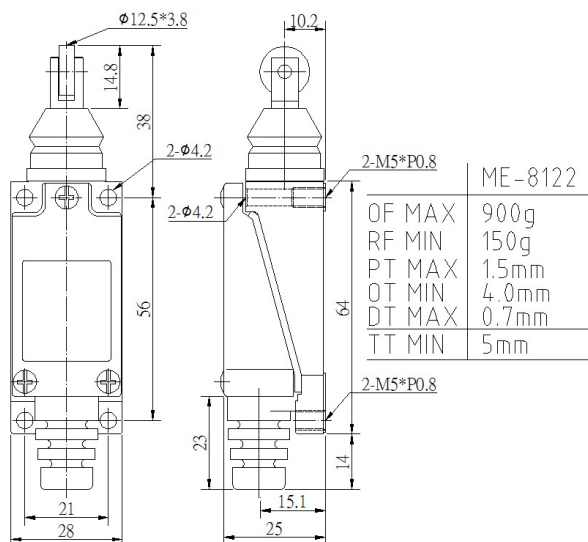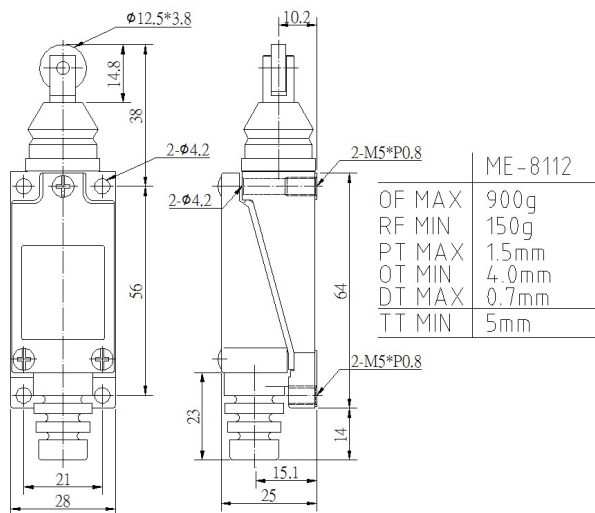

ME-8112




ME-8122



ME-8166



ME-8169

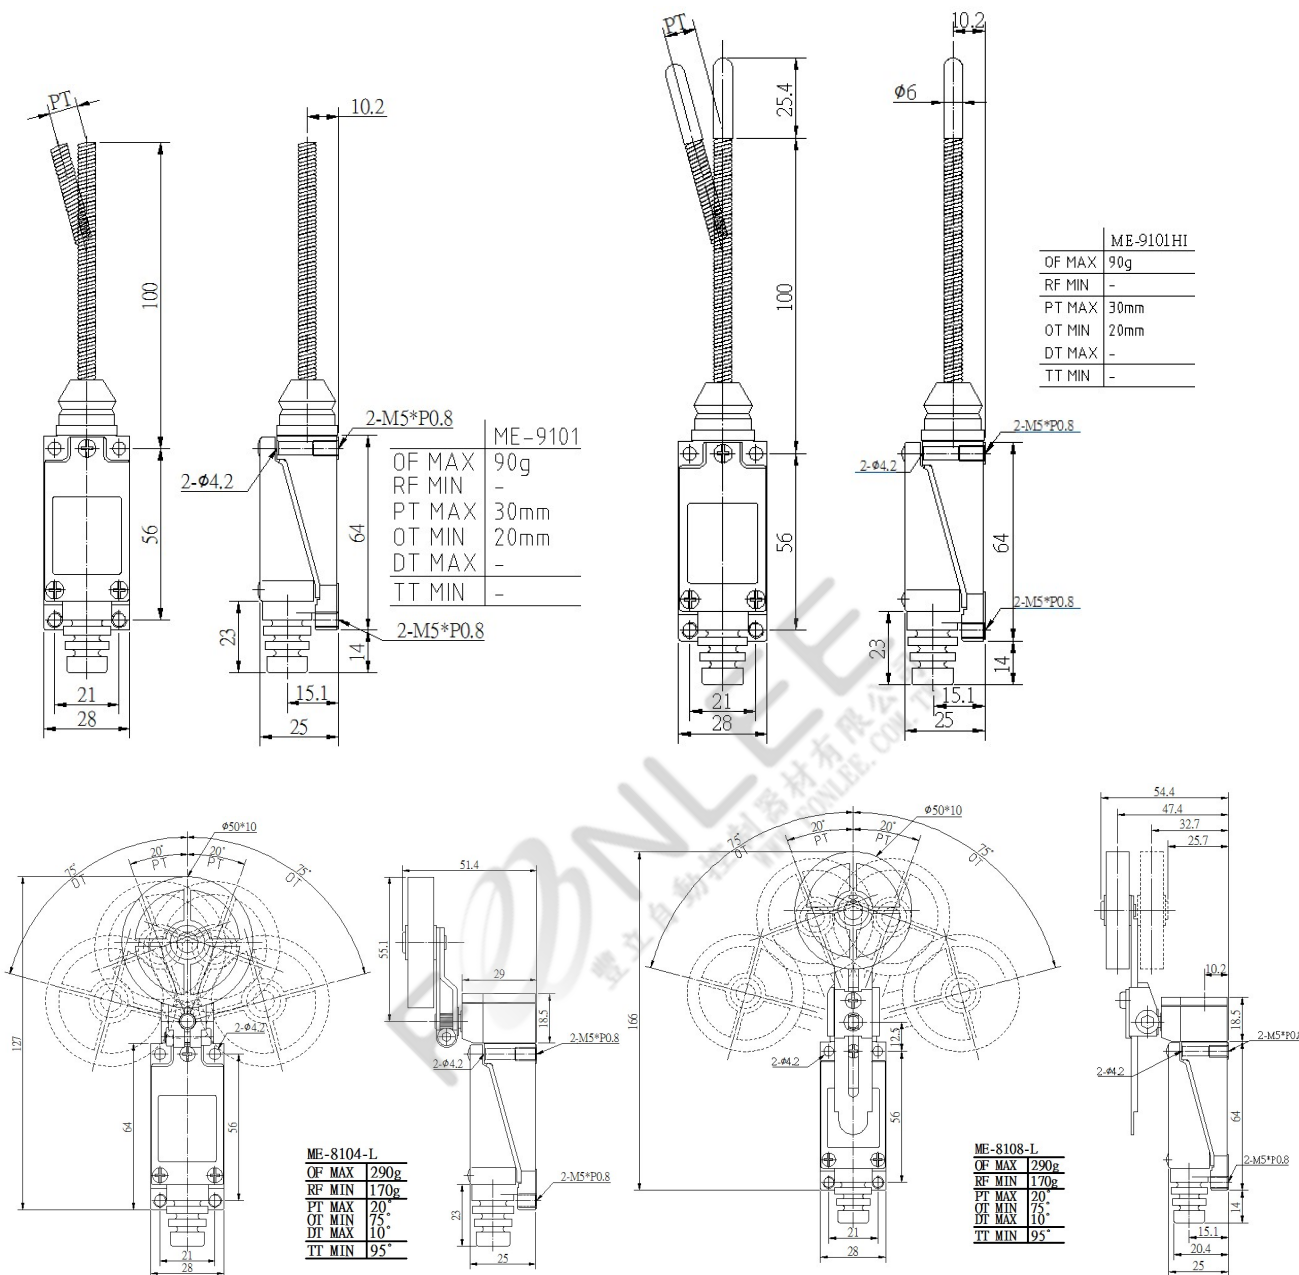

ME-9101



ME-9101-HI



ME-8104-L



ME-8108-L