



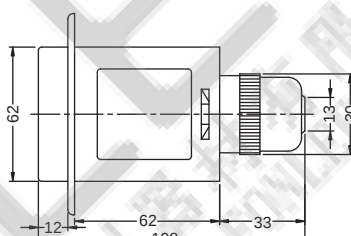








TWIN DIGITAL TIMER

雙調型數位性限時繼電器

TDV-N□		TDV-Y□	
DIMENSIONS(mm) 尺寸	60H×48W×75D 	DIMENSIONS(mm) 尺寸	88H×58W×75D 
			
SURFACE(-N) 露出型	8PFA	FLUSH(-Y) 埋入型	US-08, P3G-08
			
FULL TIMING RANGE 時間範圍	SEC:99.9x99.9, 999x999 MIN:99.9x99.9, 999x999 H R :99.9x99.9, 999x999		
RATED VOLTAGE 額定電壓	DC(V): 12, 24 AC(V): 12, 24, 48, 110, 220, 240, 50/60Hz		
INDICATOR OPERATING 指示燈動作	After contact transfer 動作後指示		
L I F E 壽命	MECHANICAL 機械	5×10 ⁶ times	
	ELECTRICAL 電氣	10 ⁵ times	
A C C U R A C Y 精確度	TIME ERROR 時間誤差	± 0.05% sec	
	REPEAT ERROR 往復誤差	± 0.03% sec	
	SETTING ERROR 設定誤差	0	
	VOLTAGE ERROR 電壓誤差	± 0.05% sec	
	TEMP. ERROR 溫度誤差	± 0.05% sec	
RESET TIME 複歸時間	0.1 sec max		
CONSUMED POWER 消耗功率	2VA		
AMBIENT TEMPERATURE 使用周圍溫度	-10℃~+55℃		
AMBIENT HUMIDITY 使用周圍濕度	45~85%RH		
WEIGHT 重量	210g		

TDV-N1/Y1 限時 1C 5A	
	POWER (2-7) OFF NC (8-5) ON NO (8-6) OFF LAMP ON LAMP 
TDV-N/Y 限時 2C 5A	
mode A 	POWER (2-7) OFF NC (8-5) ON NO (8-6) OFF NC (1-4) ON NO (1-3) OFF LAMP ON LAMP 
TDV-N/Y 限時 1C 5A, 瞬時 1C 5A	
mode B 	POWER (2-7) OFF NC (8-5) ON NO (8-6) NC (1-4) NO (1-3) OFF LAMP ON LAMP 