


|: 221-415

COMPACT ;; 4 mm²; 5-;;; 85 °C (T85); 4,00 mm²;

www.wago.com/221-415

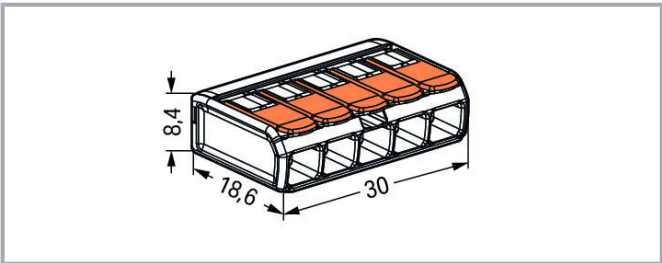

- -
- 2 3 5
- 0.14 ~ 4 mm²
-
-
-
-
-
-

WAGO Contact, Ltd
5F., No.168, Jiankang Rd
Zhonghe City | Taipei County 23585, Taiwan
Tel.: +886 2 22259755 | Fax: +886 2 22251511
Email: info.taiwan@wago.com

+886 2 22250123



■

1:

IEC/EN

	EN 60664
(II / 2)	450 V
(II / 2)	4 kV
	32 A
0	(II / 2) ≙ II / 2

UL

	UL 486C
UL (C)	600 V
UL (C)	20 A

	CAGE CLAMP®
	4 mm²
	0.2 ... 4 mm² / 24 ... 12 AWG
	0.2 ... 4 mm² / 24 ... 12 AWG
	0.14 ... 4 mm² / 24 ... 12 AWG
	11 mm / 0.43
	5
	1
	30 mm / 1.181 inch
	8.6 mm / 0.327 inch

/

18.8 mm / 0.732 inch

UL 94	V2
	0.075 MJ
	4 g
0	85 °C
Continuous operating temperature	105 °C
T-Marking per EN 60998	T85

Product Group	7 (Push Wire Conn.)
	BOX
	DE
GTIN	4055143234658
	85369010000

/

Country specific Approvals

	CCA DEKRA Certification B.V.	EN 60998	NTR NL- 7642
	CCA DEKRA Certification B.V.	EN 60998	71- 101731

Ship Approvals

	ABS American Bureau of Shipping	-	18- HG1755093- PDA
--	------------------------------------	---	--------------------------

/

WAGO Contact, Ltd
 5F., No.168, Jiankang Rd
 Zhonghe City | Taipei County 23585, Taiwan
 Tel.: +886 2 22259755 | Fax: +886 2 22251511
 Email: info.taiwan@wago.com

+886 2 22250123



DNV GL
Det Norske Veritas, Germanischer Lloyd

EN 60998

TAE000015T



LR
Lloyds Register

EN 60998

04/20013
(E8)

UL-Approvals



UL
Underwriters Laboratories Inc.

UL 467

E201573



UL
Underwriters Laboratories Inc.

UL 486C

E69654

Mounting adapter



: 221-500
; 221 - 4 mm²; TS35 / ;

www.wago.com/221-500

: 221-500/000-006
; 221 - 4 mm²; TS35 / ;

www.wago.com/221-500/000-006

: 221-500/000-053
; 221 - 4 mm²; TS35 / ; -

www.wago.com/221-500/000-053

: 221-505
; 5 ; 221 - 4 mm²;;

www.wago.com/221-505

: 221-505/000-004
; 5 ; 221 - 4 mm²;;

www.wago.com/221-505/000-004

: 221-515
; 5 ; 221 - 4 mm²;;

www.wago.com/221-515

: 221-515/000-004
; 5 ; 221 - 4 mm²;;

www.wago.com/221-515/000-004

/

WAGO Contact, Ltd

5F., No.168, Jiankang Rd

Zhonghe City | Taipei County 23585, Taiwan

Tel.: +886 2 22259755 | Fax: +886 2 22251511

Email: info.taiwan@wago.com

+886 2 22250123

	: 221-525 ; 5 ; 221 - 4 mm ² ;;	www.wago.com/221-525
---	---	--

	: 221-525/000-004 ; 5 ; 221 - 4 mm ² ;;	www.wago.com/221-525/000-004
---	---	--

Jumper

	: 221-941 ;; 2-;;	www.wago.com/221-941
---	----------------------	--

	: 221-941/000-006 ;; 2-;;	www.wago.com/221-941/000-006
---	------------------------------	--

	: 221-942 ;; 2-;;	www.wago.com/221-942
---	----------------------	--

	: 221-942/000-006 ;; 2-;;	www.wago.com/221-942/000-006
---	------------------------------	--

Documentation

Bid Text

221-415 docx - Datei	2019123	docx 15.7 kB
-------------------------	---------	-----------------

221-415 X81 - Datei	2019219	xml 3.5 kB
------------------------	---------	---------------

Additional Information

Technical explanations	201943	pdf 2.2 MB
------------------------	--------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 221-415	URL
----------------------	-----

CAE data

EPLAN Data Portal 221-415	URL
---------------------------	-----

71 IKFN Portal 221-415
/

WAGO Contact, Ltd

5F., No.168, Jiankang Rd

Zhonghe City | Taipei County 23585, Taiwan

Tel.: +886 2 22259755 | Fax: +886 2 22251511

Email: info.taiwan@wago.com


+886 2 22250123

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 221-415
COMPACT ; ; 4 mm²; 5-;; ; 85 °C (T85); 4,00 mm²;


URL

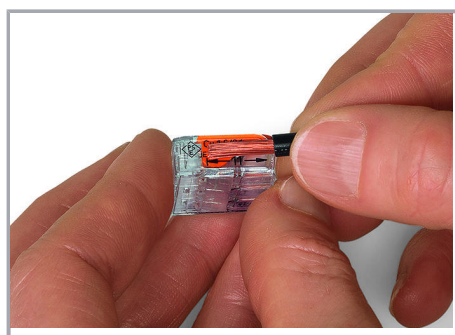


Strip conductor to 11 mm (0.43 inch).

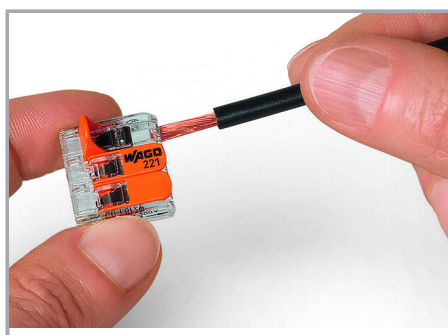


Termination: Lift the lever to open the clamping unit and insert a stripped conductor.

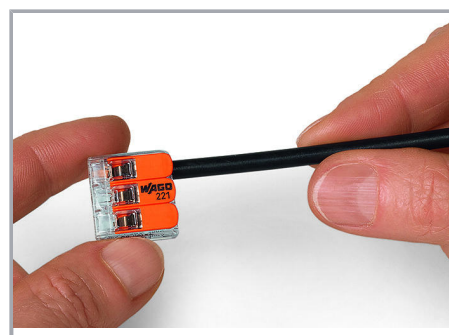

Then, lower the lever to close the clamp.

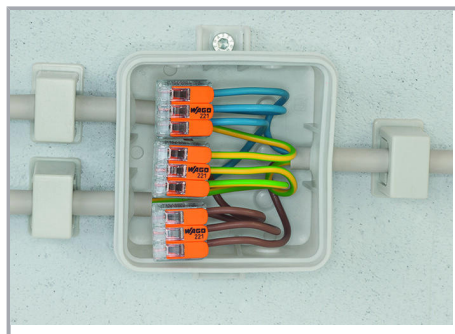

Wiring fine-stranded conductors in junction boxes.

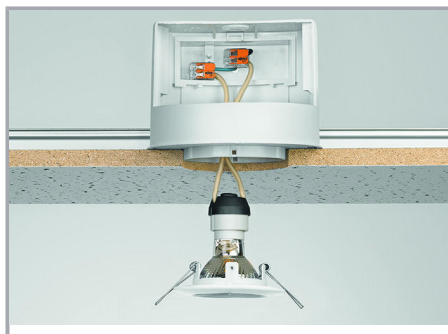

Custom low-voltage lighting system



Lighting distribution in a ceiling canopy


/

| : 221-415

www.wago.com/221-415



Pendant light connection in a suspended ceiling

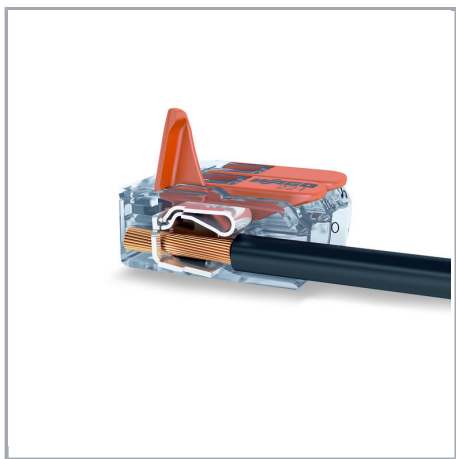

COMPACT Splicing Connectors for All Conductor Types (4 mm²), 221 Series

/

WAGO Contact, Ltd
5F., No.168, Jiankang Rd
Zhonghe City | Taipei County 23585, Taiwan
Tel.: +886 2 22259755 | Fax: +886 2 22251511
Email: info.taiwan@wago.com

+886 2 22250123



Compact, lever-operated splicing connectors:

Tool-free connection of up to five stripped, fine-stranded conductors from 0.14 ... 4 mm², as well as solid or stranded conductors from 0.2 ... 4 mm² (24 ... 12 AWG).

How they work:

Pull up an orange lever to open the clamping unit. Then insert the conductor and push the lever back down, flush with the connector housing.

Safety:

The lever's specially designed rest position reliably prevents accidental unclamping of a connected conductor.

Application safety, for any type of conductor (solid, stranded, fine-stranded), is confirmed by approvals like ENEC or UL.

/