


Connectors

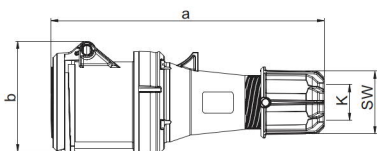


Power Twist Connector IP44

	63 Amp		
Poles	3	4	5
a	269	269	269
b	107	107	107
K_cable Ø [mm]	14,5-36	14,5-36	14,5-36
Connection type:	Contact frame with screws		
Wire flexible [mm ²]	6-16		
Contact screws [Ncm]	200 Ncm		
SW	61	61	61
Weight [g]	624	664	720

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact add a „5“ e.g. 23351-6 (see page 10)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 23361-6 (see page 10)

IP44 splashproof

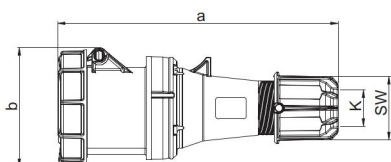


Power Twist Connector IP66/67

	63 Amp		
Pole	3	4	5
a	269	269	269
b	114	114	114
K_cable Ø [mm]	14,5-36	14,5-36	14,5-36
Connection type:	Contact frame with screws		
Wire flexible [mm ²]	6-16		
Contact screws [Ncm]	200 Ncm		
SW	61	61	61
Weight [g]	669	710	768

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact add a „5“ e.g. 2335-6 (see page 10)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 2336-6 (see page 10)

IP66/67 watertight

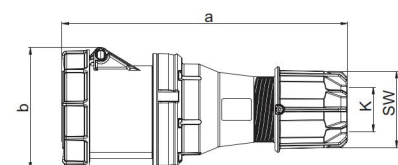

Power Twist Connector IP66/67

	125 Amp		
Pole	3	4	5
a	287	287	287
b	124	124	124
K_cable Ø [mm]	22,5-50	22,5-50	22,5-50
Connection type:	Contact frame with screws		
Wire flexible [mm ²]	16-50		
Contact screws [Ncm]	450 Ncm		
SW	81	81	81
Weight [g]	1060	1167	1266

- contact frame with screws
- housing material: PA6
- contacts: brass with lamellar contact CuBe
 - to order with pilot contact add a „5“ e.g. 2435-6 (see page 10)
 - to order with pilot contact system (PCS) please add a „6“ e.g. 2436-6 (see page 10)

IP66/67 watertight

**POWER
TWIST**



■ ■ ■ **Safety**

■ ■ ■ **High impact resistance**

■ ■ ■ **Optimum grip**

■ ■ ■ **Large connection area**

■ ■ ■ **Time saving**

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50- 500V~ 100-300Hz 10h	>50- 500V~ 301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
63	3	2	2331-4	2331-6	2331-9	2331-7	2331-10	2331-2
63	4	2	2341-4	2341-9	2341-6	2341-7	2341-10	2341-2
63	5	2	2351-4	2351-9	2351-6	2351-7	2351-10	2351-2



2351-6

63	3	2	233-4	233-6	233-9	233-7	233-10	233-2
63	4	2	234-4	234-9	234-6	234-7	234-10	234-2
63	5	2	235-4	235-9	235-6	235-7	235-10	235-2



235-6

125	3	2	243-4	243-6	243-9	243-7	243-10	243-2
125	4	2	244-4	244-9	244-6	244-7	244-10	244-2
125	5	2	245-4	245-9	245-6	245-7	245-10	245-2



245-6

One contact – for extreme environments

