


# Wall sockets

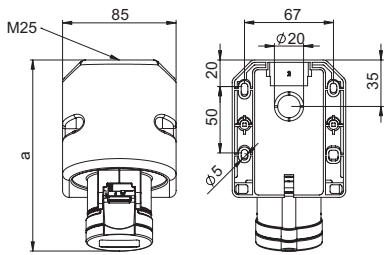


b=height  
angle=15°

## Wall socket IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	142	145	144	155	155	157
b	97	98	104	106	106	111
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	226	240	259	274	291	318

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 115-6v
- top and rear entry
- incl. threaded cable grommet

**IP44** splashproof

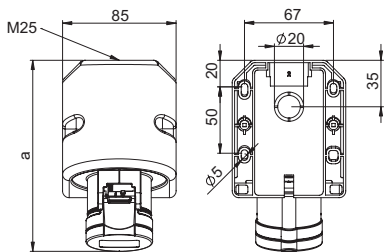


b=height  
angle=15°

## Turbo Twist Wall socket IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	142	145	144	155	155	157
b	97	98	104	106	106	111
M	25	25	25	25	25	25
Connection type: Screwless terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Weight [g]	228	240	264	274	290	319

- screwless connection technology
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 115-6TTv
- top and rear entry
- incl. threaded cable grommet

**IP44** splashproof

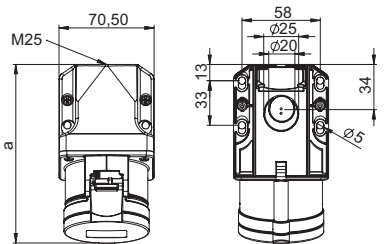


b=height  
angle=15°

## Wall socket IP44

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	132	133	133	145	145	145
b	94	97	100	103	103	107
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	202	214	233	249	365	292

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 115-6kv
  - to order Turbo Twist design (screwless connection technology) please add a „TT“ e.g. 115-6kTT
- top and rear entry
- incl. threaded cable grommet

**IP44** splashproof

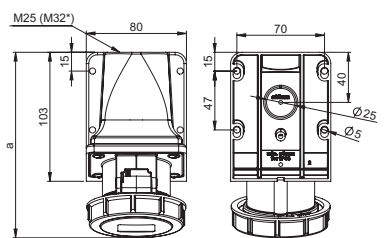

b=height  
angle=15°

## Wall socket IP67

	16 Amp			32 Amp		
	3	4	5	3	4	5
Poles	3	4	5	3	4	5
a	146	148	148	161	161	163
b	96	99	102	108	108	112
M*	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	226	241	275	298	314	351

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 1152-6v
  - to order Turbo Twist design (screwless connection technology) please add a „TT“ e.g. 1152-6TT
- top and rear entry

**IP67** watertight

\*M32 optional on request available

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	10	113-4	<b>113-6</b>	113-9	113-7	113-10	113-2
16	4	10	114-4	114-9	<b>114-6</b>	114-7	114-10	114-2
16	5	10	115-4	115-9	<b>115-6</b>	115-7	115-10	115-2
32	3	10	123-4	<b>123-6</b>	123-9	123-7	123-10	123-2
32	4	10	124-4	124-9	<b>124-6</b>	124-7	124-10	124-2
32	5	10	125-4	125-9	<b>125-6</b>	125-7	125-10	125-2



113-6

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	10	113-4TT	<b>113-6TT</b>	113-9TT	113-7	113-10	113-2
16	4	10	114-4TT	114-9TT	<b>114-6TT</b>	114-7	114-10	114-2
16	5	10	115-4TT	115-9TT	<b>115-6TT</b>	115-7	115-10	115-2
32	3	10	123-4TT	<b>123-6TT</b>	123-9TT	123-7	123-10	123-2
32	4	10	124-4TT	124-9TT	<b>124-6TT</b>	124-7	124-10	124-2
32	5	10	125-4TT	125-9TT	<b>125-6TT</b>	125-7	125-10	125-2



113-6TT

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	10	113-4k	<b>113-6k</b>	113-9k	113-7k	113-10k	113-2k
16	4	10	114-4k	114-9k	<b>114-6k</b>	114-7k	114-10k	114-2k
16	5	10	115-4k	115-9k	<b>115-6k</b>	115-7k	115-10k	115-2k
32	3	10	123-4k	<b>123-6k</b>	123-9k	123-7k	123-10k	123-2k
32	4	10	124-4k	124-9k	<b>124-6k</b>	124-7k	124-10k	124-2k
32	5	10	125-4k	125-9k	<b>125-6k</b>	125-7k	125-10k	125-2k



115-6k

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	5	1132-4	<b>1132-6</b>	1132-9	1132-7	1132-10	1132-2
16	4	5	1142-4	1142-9	<b>1142-6</b>	1142-7	1142-10	1142-2
16	5	5	1152-4	1152-9	<b>1152-6</b>	1152-7	1152-10	1152-2
32	3	5	1232-4	<b>1232-6</b>	1232-9	1232-7	1232-10	1232-2
32	4	5	1242-4	1242-9	<b>1242-6</b>	1242-7	1242-10	1242-2
32	5	5	1252-4	1252-9	<b>1252-6</b>	1252-7	1252-10	1252-2




1152-6



# Wall sockets

## Wall socket IP44

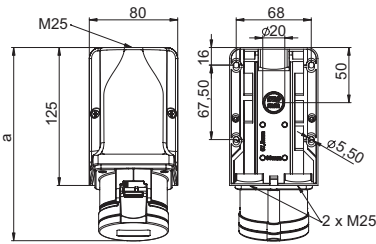


b=height  
angle=15°

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	175	176	176	188	188	188
b	127	130	133	136	136	141
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	291	304	322	338	355	382

- with screw terminals
- **housing for wiring through**
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 915-6v
  - to order Turbo Twist design (screwless connection technology) please add a „TT“ e.g. 915-6TT
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

## Wall socket IP44

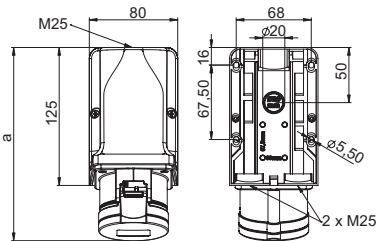


b=height  
angle=15°

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	175	176	176	188	188	188
b	127	130	133	136	136	141
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	315	336	362	362	387	422

- with screw terminals
- **housing for wiring through**
- **with terminals (3-pole) not wired**
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 915-6vw
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

## Wall socket with window IP44

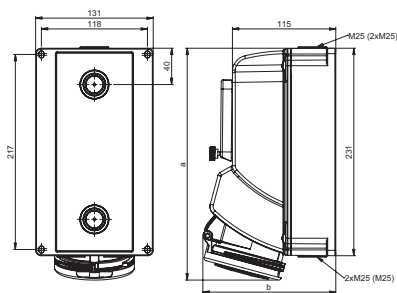


\* Option: M32 or closed

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	249	249	249	259	259	259
b	141	141	141	142	142	148
M*	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Weight [g]	917	922	967	972	985	1033

- with screw terminals
- housing material: PC/ABS
- contacts: nickel-plated contacts
- top, bottom or rear entry
- with DIN-rail
- window for 5 modules
- incl. threaded bung

**IP44** splashproof

## Wall socket with window IP67

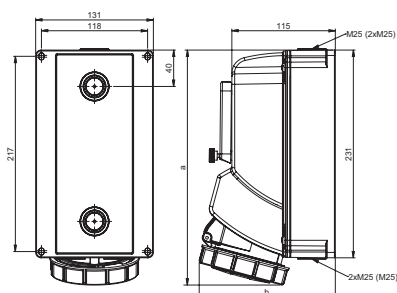

\* Option: M32 or closed

Pole	16 Amp			32 Amp		
	3	4	5	3	4	5
a	253	253	253	259	259	259
b	141	141	141	145	145	153
M*	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Weight [g]	952	957	1002	1007	1020	1068

- with screw terminals
- housing material: PC/ABS
- contacts: nickel-plated contacts
- top, bottom or rear entry
- with DIN-rail
- window for 5 modules
- incl. threaded bung

**IP67** watertight

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	5	913-4	<b>913-6</b>	913-9	913-7	913-10	913-2
16	4	5	914-4	914-9	<b>914-6</b>	914-7	914-10	914-2
16	5	5	915-4	915-9	<b>915-6</b>	915-7	915-10	915-2
32	3	5	923-4	<b>923-6</b>	923-9	923-7	923-10	923-2
32	4	5	924-4	924-9	<b>924-6</b>	924-7	924-10	924-2
32	5	5	925-4	925-9	<b>925-6</b>	925-7	925-10	925-2



915-6

16	3	5	913-4w	<b>913-6w</b>	913-9w	913-7w	913-10w	913-2w
16	4	5	914-4w	914-9w	<b>914-6w</b>	914-7w	914-10w	914-2w
16	5	5	915-4w	915-9w	<b>915-6w</b>	915-7w	915-10w	915-2w
32	3	5	923-4w	<b>923-6w</b>	923-9w	923-7w	923-10w	923-2w
32	4	5	924-4w	924-9w	<b>924-6w</b>	924-7w	924-10w	924-2w
32	5	5	925-4w	925-9w	<b>925-6w</b>	925-7w	925-10w	925-2w



913-6w

16	3	1	75133-4	<b>75133-6</b>	75133-9	75133-7
16	4	1	75143-4	75143-9	<b>75143-6</b>	75143-7
16	5	1	75153-4	75153-9	<b>75153-6</b>	75153-7
32	3	1	75233-4	<b>75233-6</b>	75233-9	75233-7
32	4	1	75243-4	75243-9	<b>75243-6</b>	75243-7
32	5	1	75253-4	75253-9	<b>75253-6</b>	75253-7



75253-6

16	3	1	751323-4	<b>751323-6</b>	751323-9	751323-7
16	4	1	751423-4	751423-9	<b>751423-6</b>	751423-7
16	5	1	751523-4	751523-9	<b>751523-6</b>	751523-7
32	3	1	752323-4	<b>752323-6</b>	752323-9	752323-7
32	4	1	752423-4	752423-9	<b>752423-6</b>	752423-7
32	5	1	752523-4	752523-9	<b>752523-6</b>	752523-7



752523-6

- 
- 
- 
- 
- 
- 
- 
- 
-

# Wall sockets

## Power Twist Wall socket IP66/67

	63 Amp		
Poles	3	4	5
a	213	213	213
b	173	173	173
Connection type: Contact frame with screws			
Wire flexible [mm <sup>2</sup> ]	6-16		
solid [mm <sup>2</sup> ]	6-25		
Contact screws [Ncm]	200 Ncm		
Weight [g]	820	869	923

- contact frame with screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 1335-6 (see page 10)
  - to order with pilot contact system (PCS) add a „6“ e.g. 1336-6 (see page 10)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51

**IP66/67** watertight  
**IP44** on request

## Power Twist Wall socket IP66/67

	63 Amp		
Poles	3	4	5
a	306	306	306
b	195	195	195
Connection type: Contact frame with screws			
Wire flexible [mm <sup>2</sup> ]	6-16		
solid [mm <sup>2</sup> ]	6-25		
Contact screws [Ncm]	200 Ncm		
Weight [g]	1360	1409	1463

- contact frame with screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 13575-6 (see page 10)
  - to order with pilot contact system (PCS) please add a „6“ e.g. 13576-6 (see page 10)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51


**IP66/67** watertight  
**IP44** on request

## Power Twist Wall socket IP66/67


	125 Amp		
Poles	3	4	5
a	322	322	322
b	205	205	205
Connection type: Contact frame with screws			
Wire flexible [mm <sup>2</sup> ]	16-50		
solid [mm <sup>2</sup> ]	16-50		
Contact screws [Ncm]	450 Ncm		
Weight [g]	1745	1752	1852

- contact frame with hexag socket screws
- housing material: PC/ABS
- contacts: brass with lamellar contact CuBe
  - to order with pilot contact add a „5“ e.g. 1455-6 (see page 10)
  - to order with pilot contact system (PCS) add a „6“ e.g. 1456-6 (see page 10)
- top, bottom or rear entry
- housing can be rotated by 180°
- incl. threaded bung
- cable-glands see accessories page 51


**IP66/67** watertight

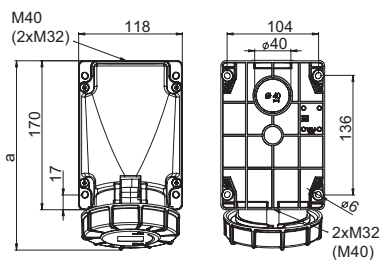

b=height  
angle=15°

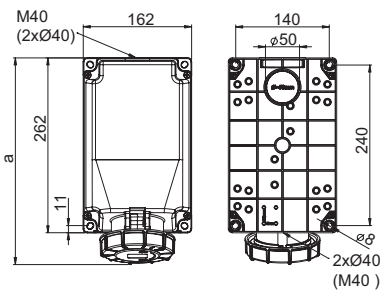

b=height  
angle=15°

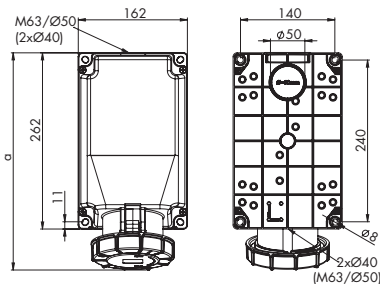

b=height  
angle=15°



### Advantages:

Housing can be rotated by 180° – the position of the cable entry can be chosen!

