


1109 KSS 黏式PC板隔離柱 SELF-ADHESIVE PCB SUPPORT



單位：mm



型號 Item No.	間距 H1	適用PC板		包裝 Packing
		鑽孔 M1	板厚 T1	
MMR-5	4.8	3.2	1.6	100pcs
MMR-6	6.4			
MMR-8	7.9			
MMR-9	9.5			
MMR-11	11.1			
MMR-13	12.7			
MMR-14	14.3			
MMR-16	15.9			

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2，底座背膠。
用途：用於無法鑽孔之機板與PC板間的固定。

1110 KSS PC板軌道 CIRCUIT BOARD TRACK




單位：mm




型號 Item No.	L	L1	W	W1	H	H1	H2	包裝 Packing
BT-90A	89.5	77.6	9.7	2.0	4.5	1.5	3.0	100pcs
BT-90	89.5	64.4	9.7	2.0	4.5	1.5	3.0	
BT-120	120.0	95.5	9.5	2.0	4.5	1.5	3.0	
BT-140	141.0	115.4	10.0	1.9	4.5	1.5	3.0	
BT-155A	154.0	141.0	6.6	2.0	4.6	1.3	3.3	
BT-160	160.5	135.5	9.7	2.0	4.5	1.5	3.0	
BT-160A	162.0	148.2	9.6	2.0	6.5	4.0	2.5	
BT-77DBK	77.0	67.0	6.6	1.4	6.0	3.0	3.0	黑色


材質：UL合格之NYLON66 (本色)，防火等級 94V-2。
用法：以3mm x 6mm平底螺絲及螺帽 2組，將軌道固定。再將 PC板嵌入即可。
軌道中增有 2個防震片可保護 PC板。
★BT-90A,BT-155A,BT-160A設有 2片插鞘可免用螺絲固定、直接插入即可。

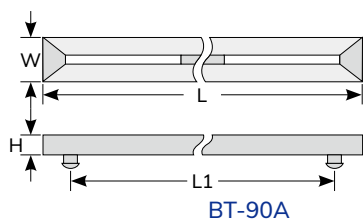


BT-90A

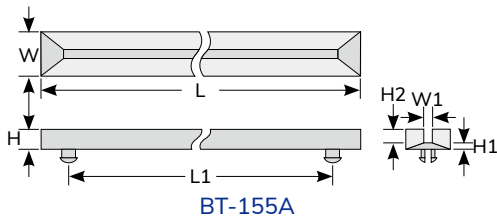


BT-155A

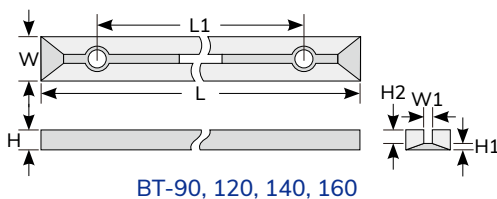

BT-90, 120, 140, 160

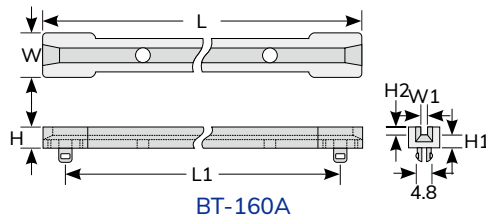

BT-160A

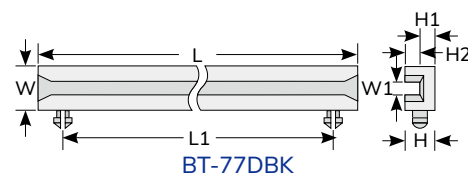

BT-77DBK

配線槽

配線標誌

紮線帶

結束帶

固定座

固定頭、浪管

保護部品

接線頭

套管

固定夾

PC板部品

扣具