

0305 KSS 固定鎖式紮線帶 MOUNTING CABLE TIE





型號 Item No.	長 L		寬 W	螺絲孔徑 Mounting Hole Dia.	最大束線徑 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包裝 Packing
	mm	inch				lbs	kgs	
TCV-100	110	4 3/8"	2.5	3.2	25	18	8	100pcs
TCV-155	171.5	6 11/16"	3.7	5.0	40	40	18	
TCVS-170	171.5	6 11/16"	3.7	4.0	40	40	18	
TCV-205	219	8 11/16"	4.2	5.0	52	50	22	
NEW TCV-205DZ	219	8 11/16"	4.8	5.0	52	75	34	
TCV-300	300	11 7/8"	4.8	4.8	85	50	22	
TCV-300L	300	12 1/2"	7.8	6.0	80	120	55	
TCV-370	370	14 1/2"	4.8	4.8	102	50	22	
TCV-400	400	15 3/4"	7.9	6.0	112	120	55	

材質：UL合格之NYLON 66，防火等級94V-2。

顏色：本色，另備有黑色。


用途：紮線帶綁紮電纜後，將整束電纜以螺絲固定於基板上。

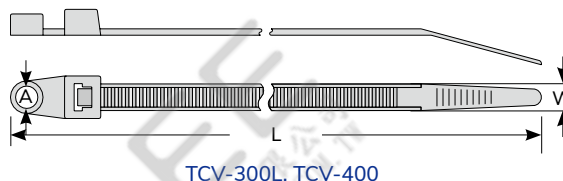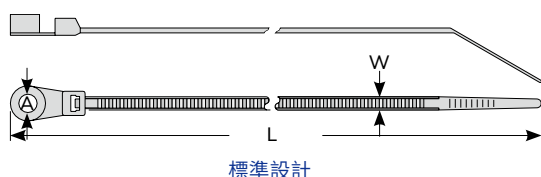

0309 KSS 雙頭雙向紮線帶 DOUBLE LOOP MOUNTING TIE



影片

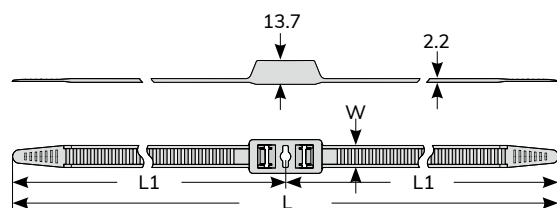

型號 Item No.	L		L1		寬 W	螺絲孔徑 Mounting Hole Dia.	最大束線徑 Max.Bundle Dia.	承受力 Min LoopTensile Strength		包裝 Packing
	mm	inch	mm	inch				lbs	kgs	
DMT-500XLBK	500	19 11/16"	250	10"	12.7	6.2	60	250	114	20pcs

材質：UL合格之NYLON 66 (黑色)，防火等級94V-2。

用途：束緊管線後，再以螺絲固定於基板上。

- 特點：
1. 雙頭雙向式設計，透過一條紮線帶即可平行束緊隔離兩項標的物，不受佈線施工，場域大小、方向之限制。
 2. 頭部設有固定孔洞，束緊管線後搭配螺絲便可以固定於基板上。

