

EFS-A Contact:1a + 1b, 2a +2b, AC250V 15A





EFS-B

EFS-C


EFS-AN

EFS-BN

EFS-CN

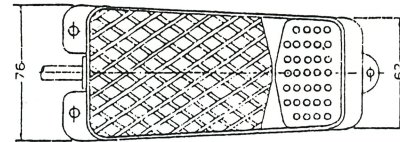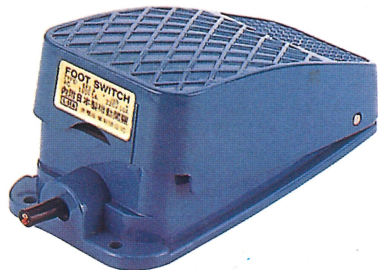



AM-1305 EFS-A 型內臟開關



DS-139 EFS-C 型內臟開關



Type	Rating	Contact Point	Micro Switch	Actuation Force	Unit Weight	Cord Material	ENCLOSURES MATERIAL
EFS-A	250 VAC 15A	ON-OFF 1a1b	AM1305×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	ALUMINUM diecast PLASTIC 塑殼鋁底
EFS-2A	250 VAC 15A	ON-OFF 2a2b	AM1305×2	3.5kg	0.42kg	PVC,0.75mm ² ,6C	ALUMINUM diecast PLASTIC 塑殼鋁底
EFS-C	250 VAC 6A	ON-OFF-ON PUSH ON PUSH OFF	DS-139×1	3.5kg	0.4kg	PVC,0.75mm ² ,2C	ALUMINUM diecast PLASTIC 塑殼鋁底
EFS-2C	250 VAC 6A	ON-OFF-ON PUSH ON PUSH OFF	DS-138×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	ALUMINUM diecast PLASTIC 塑殼鋁底
EFS-AN	250 VAC 15A	ON-OFF 1a1b	AM1305×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	ALUMINUM-diecast 全鋁製
EFS-2AN	250 VAC 15A	ON-OFF 2a2b	AM1305×2	3.5kg	0.42kg	PVC,0.75mm ² ,6C	ALUMINUM-diecast 全鋁製
EFS-CN	250 VAC 6A	ON-OFF-ON PUSH ON PUSH OFF	DS-139×1	3.5kg	0.4kg	PVC,0.75mm ² ,2C	ALUMINUM-diecast 全鋁製
EFS-2CN	250 VAC 6A	ON-OFF-ON PUSH ON PUSH OFF	DS-138×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	ALUMINUM-diecast 全鋁製
EFS-B	250 VAC 10A	ON-OFF 1a1b	VL-15×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	PLASTIC 全塑殼
EFS-2B	250 VAC 10A	ON-OFF 2a2b	VL-15×2	3.5kg	0.4kg	PVC,0.75mm ² ,6C	PLASTIC 全塑殼
EFS-BN	250 VAC 10A	ON-OFF 1a1b	VL-15×1	3.5kg	0.4kg	PVC,0.75mm ² ,3C	ALUMINUM-diecast 全鋁製
EFS-2BN	250 VAC 10A	ON-OFF 2a2b	VL-15×2	3.5kg	0.4kg	PVC,0.75mm ² ,6C	ALUMINUM-diecast 全鋁製

• EFS-D

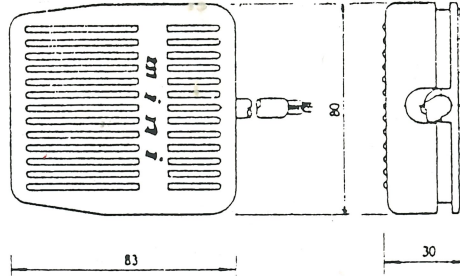


- Poly-Carbonate
- Gray

• EFS-D1

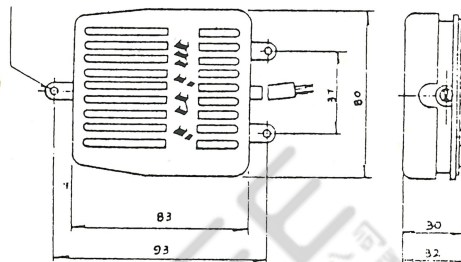



Type	Rating	Contact Point	Cord Material	Actuation Force	Unit Weight
EFS-D	250VAC 10A	ON-OFF 1a1b	PVC0.75mm ² ×3C	1.0kg	0.25kg
EFS-D1	250VAC 10A	ON-OFF 1a1b	PVC0.75mm ² ×3C	1.0kg	0.25kg

• SFM-P1

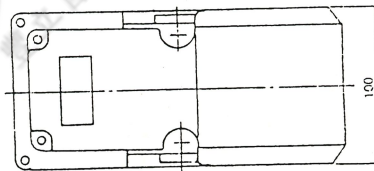

- ALUMINUM
- Gray

• SFM-1

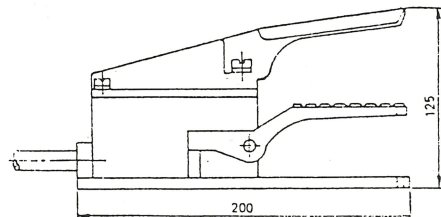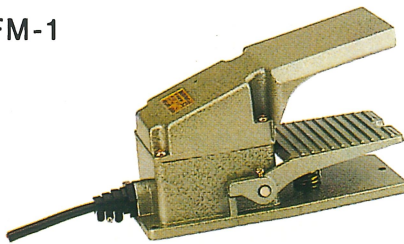

Type	Rating	Contact Point	Cord Material	Actuation Force	Unit Weight	Cord Material
SFMP-1	250VAC 10A	AM-1305×1	ON-OFF 1a1b	3.0kg	0.88kg	PVC1.25mm ² ×6C
SFMP-2	250VAC 6A	DS139×1	ON-OFFON push ON	3.0kg	0.85kg	PVC1.25mm ² ×2C
SFMP-3	250VAC 10A	AM-1305×2	ON-OFF 2a2b	3.0kg	1.0kg	PVC1.25mm ² ×6C'
SFMP-4	250VAC 6A	DS-138×1	ON-ON 1a1b 0 1Aab	3.0kg	0.85kg	PVC1.25mm ² ×3C
SFM-1	250VAC 10A	AM-1305×1	ON-OFF 1a1b	5.3kg	1.1kg	PVC1.25mm ² ×3C
SFM-2	250VAC 6A	DS-139×1	ON-OFFON 1a 0 1b	5.3kg	1.1kg	PVC1.25mm ² ×2C
SFM-3	250VAC 10A	AM-1305×2	ON-OFF 2a2b	5.3kg	1.25kg	PVC1.25mm ² ×6C
SFM-4	250VAC 6A	DS139×2	ON-OFF ON 2a 0 2b	5.3kg	1.1kg	PVC1.25mm ² ×3C