



因联结而喜悦!!
Delight Through Connections



町洋企業股份有限公司

DINKLE ENTERPRISE CO.,LTD.
臺灣新北市五股區五權二路19號 (新北產業園區)
No.19,Wuquan 2nd Road., Wugu District,
New Taipei City 24890, Taiwan
TEL:+886-2-8069-9000 7705-6900
FAX:+886-2-2290-1702 (代表號)
E-mail:service@dinkle.com.tw
Web site:http://www.dinkle.com

町洋國際股份有限公司

DINKLE INTERNATIONAL CO.,LTD.
臺灣新北市五股區五權二路19號 (新北產業園區)
No.19,Wuquan 2nd Road., Wugu District,
New Taipei City 24890, Taiwan
TEL:+886-2-8069-9000 7705-6900
FAX:+886-2-2290-1702
E-mail:service@dinkle.com.tw
Web site:http://www.dinkle.com

奧迪克國際有限公司 (香港)
OPTIKLE INTERNATIONAL CO., LTD.
香港九龍九龍灣宏冠道6號 鴻力工業中心B座1樓29室
Room 29, 1/F, Block B, Proficient Industrial Center,
No.6 Wang Kwun Road, Kowloon Bay, Kowloon,
HONG KONG.
TEL:+852-2795-3840 2758-8005
FAX:+852-2753-6919
E-mail:service@dinkle.com.tw
Web site:http://www.dinkle.com

東莞立洋電機有限公司
LIYANG ELECTRIC MACHINERY(DONGGUAN) CO., LTD.
廣東省東莞市黃江鎮鷄鳴崗村金錢嶺一街2號
No.2 1st street Jinqian Ridge,Jiming gang village,
Huangjiang town,Dongguan City,Guangdong Province
TEL:+86-769-8336-4350 8336-4370
FAX:+86-769-8384-8634
E-mail:service@dinkle.com.tw
Web site:http://www.dinkle.com

町洋電氣貿易(上海)有限公司

DINKLE ELECTRIC TRADING (SHANGHAI) CO.,LTD.
上海市徐匯區漕溪北路18號上實大廈16層A室
Room A,Floor 16,No.18 North Caoxi Road,Shanghai City
TEL:+86-21-6487-0636 6427-3157
FAX:+86-21-3356-2500
E-mail:service@dinkle.com.tw
Web site: http://www.dinkle.com

北京辦事處
北京市海澱區知春路甲48號盈都大廈C座1單元5B
TEL:+86-10-5873-4338
FAX:+86-10-5873-4337

成都辦事處
四川省成都市天府新區華陽濱河路二段99號4-1-503
TEL:+86-28-8736-5069
FAX:+86-28-8736-5069


沈陽辦事處
遼寧省沈陽市和平區南京北街222號鑽石星座B座2113室
TEL:+86-24-3107-8204
FAX:+86-24-2486-9893

西安辦事處
陝西省西安市雁塔區科技路209號新西藍1-1-1705室
TEL:+86-29-8885-8475
FAX:+86-21-3356-2500

町洋機電(中國)有限公司

DINKLE ELECTRIC MACHINERY(CHINA) CO.,LTD.
江蘇省昆山市千燈鎮石浦工商管理區興浦中路258號(215343)
No.258,Xingpu Mid RD,Shipu Business Administration Estate,
Qiandeng Town,Kunshan City,Jiangsu Province,China
TEL:+86-512-5708-8588
FAX:+86-512-5708-8600
E-mail:service@dinkle.com.tw
Web site: http://www.dinkle.com

Terminal Block

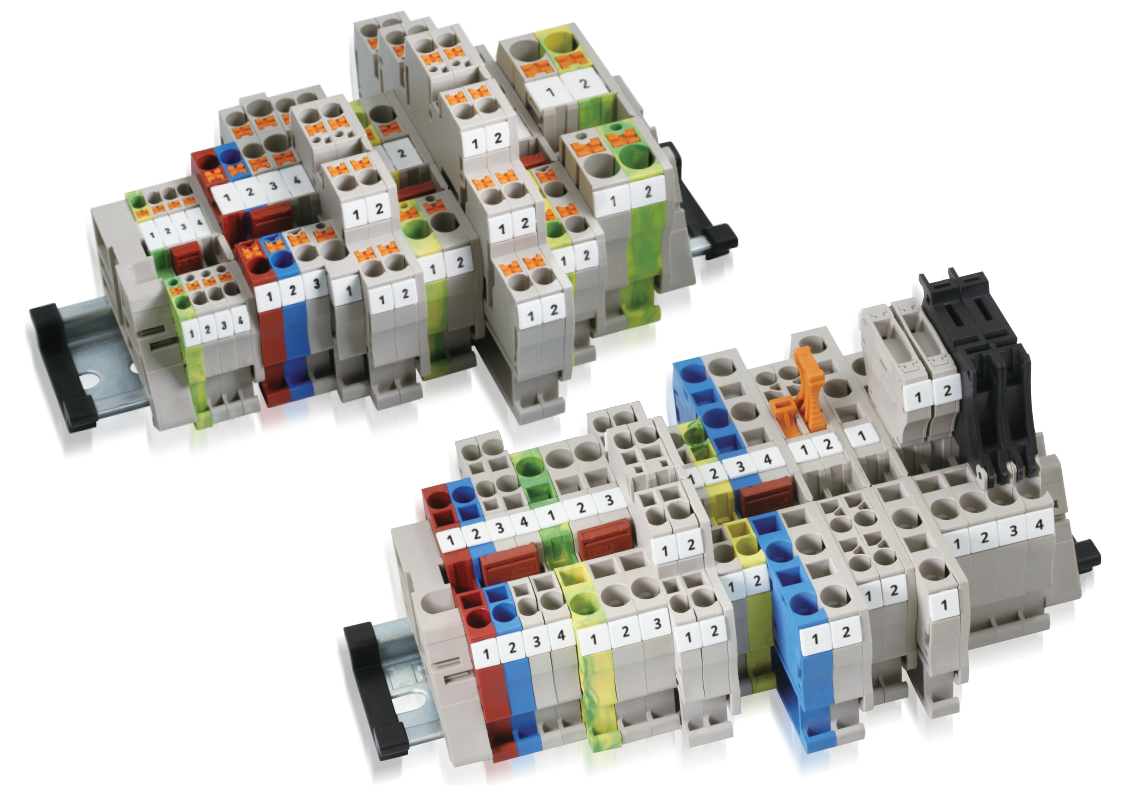

Dinkle, Delight through connections!!

Dinkle is one of the global major manufacturers of terminal blocks and committed to meet the highest application requirements of automation industry.

We continuously improve our productivity and competitive advantages, while keeping pace with the new production techniques and the global industrial trend. We work with trading offices in over 40 countries providing products and technical support services.




























The business was established in Taiwan on July 22nd, 1983, it started from manufacturing barrier type terminal blocks. The first production facilities in China were set up in 1995, with 15 sales offices in Greater China region. Dinkle facilities include an R&D center for terminal blocks in Jiangsu, two OEM product development centers in KunShan and DongGuan city, an R&D center for electronics in Taipei, a CNAS certified laboratory in Jiangsu and two main production facilities in Jiangsu and Guangdong.

Terminal blocks are widely used in six main industrial applications including Production Automation, Process Automation, Power Automation, Railway Transportation, New Energy and Equipment Manufacturing. All of our production facilities granted ISO 9001 quality control system certification and ISO 14001 environmental management system certification, and Dinkle's products have safety certifications include UL, CUL, CSA, VDE, GB. All products and materials used meet EU environmental policy of RoHS Directive and REACH regulation.


































With more than 30 years of manufacturing experiences, Dinkle team is here to help to make your business successful. We provide reliable products and offer professional technical support and practical example to illustrate our solutions which are able to assist your business of improving production automation level and technical standard. No matter what your requirement is, you will find out the ideal solutions from Dinkle.
























Push-In Design Terminal Blocks

Page 9-10							
	DP1.5	DP2.5	DP4	DP6	DP10		
Page 11-12							
	DP1.5-TN	DP2.5-TN	DP4-TN	DP6-TN			
Page 13-16							
	DP1.5-TR	DP2.5-TR	DP4-TR	DP6-TR	DPP2.5	DPP4	DP2.5-3L
Page 17-18							
	DP1.5-PE	DP2.5-PE	DP4-PE	DP6-PE	DP10-PE		
Page 19-20							
	DP2.5-TN-PE	DP4-TN-PE	DP6-TN-PE	DP2.5-TR-PE	DP4-TR-PE	DP6-TR-PE	
Page 22							
	DPP2.5-PE	DPP4-PE					

Spring Clamp Connection Terminal Blocks

Page 31-32						
	AK1.5-PE	AK2.5-PE	AK4-PE	AK6-PE	AK10-PE	AK16-PE
Page 33-34						
	AK1.5-TN-PE	AK2.5-TN-PE	AK4-TN-PE	AK6-TN-PE	AK10-TN-PE	
Page 35-36						
	AK1.5-TR-PE	AK2.5-TR-PE	AK4-TR-PE	AK6-TR-PE	AKK2.5-PE	
Page 37-39						
	AK2.5-TP	AK4-TP	AK2.5-TN-TP	AK2.5-TR-TP	AK2.5-TG	AK4-TG
Page 40-42						
	AK2.5-TN-TG	AK2.5-TR-TG	AK2.5-CP	AK4-CP	AK2.5-TN-CP	AK2.5-TR-CP
Page 43-45						
	AK4-TF(5X20)	AKK2.5-D01	AKK2.5-D02	AKK2.5-D03	AKK2.5-D04	

Spring Clamp Connection Terminal Blocks

Page 23-24							
	AK1.5	AK2.5	AK4	AK6	AK10	AK16	AK35
Page 25-26							
	AK1.5-TN	AK2.5-TN	AK4-TN	AK6-TN	AK10-TN	AK16-TN	
Page 27-28							
	AK1.5-TR	AK2.5-TR	AK4-TR	AK6-TR			
Page 29-30							
	AKK1.5	AKK2.5	AKK4	AKK2.5-PV			

Feed-Through Screw Connection Terminal Blocks

Page 47-48						
	DK2.5N	DK4N	DK6N	DK10N	DK16N	DK35N
Page 49-51						
	DK2.5N-TN	DK4N-TN	DK6N-TN	DK10N-TN	DK2.5N-TR	DK4N-TR
Page 52-53						
	DKK2.5N	DKK4N	DKK2.5N-PV	DKK4N-PV		
Page 54-55						
	DK2.5N-PE	DK4N-PE	DK6N-PE	DK10N-PE	DK16N-PE	

Feed-Through Screw Connection Terminal Blocks

Page 55-56							
	DK2.5N-TN-PE	DK4N-TN-PE	DK2.5N-TR-PE	DK4N-TR-PE			
Page 57-58							
	DK2.5N-TP	DK4N-TP	DKK2.5N-TP	DKK4N-TP			
Page 59-60							
	DK2.5N-TG	DK4N-TG	DKK2.5N-TG	DKK4N-TG			
Page 61-64							
	DK2.5N-CP	DK4N-CP	DKK2.5N-CP	DKK4N-CP	DK4N-TF(5X20)	DKK2.5N-TF(5X20)	DKK4N-TF(5X20)
Page 65-66							
	DK2.5	DK4	DK6	DK10	DK16H	DK35H	
Page 67-69							
	DK50	DK95	DK150	DK240	DK1.5-TR	DK4-TR	
Page 70-71							
	DKK2.5	DKK4	DKK2.5-PV	DKK4-PV			
Page 73-74							
	DK2.5-PE	DK4-PE	DK10-PE	DK16-PE	DK35H-PE	DK50-PE	DK95-PE
Page 75-77							
	DK2.5-TG	DK4-TR-TG	DK4-TF(5X20)	DK4-TFL(5X20)	DKK4-TF(5X20)	DK10-TF(50X20)	DK10-TFA(5X20)
Page 78-80							
	DKTD6	DKTL6	DKK2.5-D01	DKK2.5-D02	DKK2.5-D03	DKK2.5-D04	

Feed-Through Screw Connection Terminal Blocks

Page 81						
	DKES1.5	DKES1.5-XXP	DKES1.5M-XXP			
Page 82-83						
	DK2.5S	DK4S	DK6S	DK2.5P	DK4P	DK6P

Stud Terminal Blocks

Page 85-86						
	DKM5	DKM6	DKM8	DKM10	DKM12	DKMW8
Page 87						
	DKM6-2	DKM8-2	DKM10-2			

Busbar Terminal Blocks

Page 89-90									
	DKZ4	DKZ4E	DKZ4E-YG	DKZ16	DKZ35	DKZ35A	DKZ70A	DKZ70B	DKZ120

Panel Type Terminal Blocks

Page 92								
	PM2.5N	PM4N	PM6N					
Page 93-94								
	PM2.5WS	PM2.5WSA	PMM2.5WS	PMM2.5WSA				
Page 95-98								
	PM2.5WSH	PM2.5WSHA	PMM2.5WSH	PMM2.5WSHA	PM2.5W	PMM2.5WS	AK2.5P	AK2.5PP

Accessories

Page 100							
	SS2	SS3	SS4	SS5			
Page 100							
	SS6	SS7	SS8	SS11			
Page 100							
	MKH-001	MKH-002	MKW	MKL			
Page 101							
	DKSPS-001	DKSPS-007	DKTLP	DKNSPS-001	DKNSPS-002	DKNSPS-003	DKNSPS-004
Page 101							
	DKNSPS-007	AKSPS-001	AKSPS-002	AKSPS-003	AKSPS-004		
Page 102							
	AKSPS-005	DKSPS-002	DKSPS-003	DKSPS-006	DKNSPS-005	DKNSPS-006	
Page 102							
	DKNSPS-008	DKNSPS-009	DKBC60-1000	DKBC100-1000			
Page 103-104							
	DKMC	DKMSPS	DSXX-XXP	DSS XX N-XXP	DSD01-XX..N		
Page 105							
	DSD02-XX XX-A	DSD02-XX XX-B	DS6A02	DS-204	DS6B01-02P	DS6B02-02P	
Page 106							
	CSC-XX XX P	CSC-XX..N	CSC-XX..S	CSC-XX XX P			

Feed-Through Screw Connection Terminal Blocks

Page 107										
	C000007000	CSD02-X-A	DKTD6N-KP	DS6S4	C002-0101	FUK6.3A-01				
Page 108										
	DSH1	DSH2	DSHG	DKZB0310-XXXX	DKZB0510-XXXX	DKZB0515-XXXX	DKZB1010-XXXX			
Page 109										
	AKP-TG	AKP-TP	AKP-CP	PMH	TS-35C					
Page 110										
	TS-15	TS-32	TS-35	TS-35/15	TS-35N	TS-35/15N	TS-35NS	TS-35/15NS	TSC-S01	TSC-S01

Marking System

Page 112								
	TMP-SET	TMPF-01	TMPF-02	TMPF-03	TMPP-04(0.2MM)	TMPB-01	TMPK-03	
Page 112								
	TMPP-11	TMPP-01	TMPK-01	TMPK-02	TMPC-01	TMPC-02	TMPC-03	TMPC-04

Ferrules & Screw Driver


Page 117					
	DNT13-0101	Slotted screwdriver	Phillips screwdriver		
Page 118-119					
	Ferrule for single wire	0211C1XX00	Ferrule for double wire	Ring terminal	Fork terminal

Dinkle remains the right of product modification and engineering change of design. The catalogue is for reference only. The final product is made according to actual engineering drawing.


弊社標準品に関しては、修正や設計変更等が行われるため、カタログは参考であり、詳細仕様は図面を基準とする。本公司对产品保有修改、设变权，目录仅供参考，实际产品仍需依照工程图面为准。

Push-In Design Terminal

- The Push-in design features the adaptation of "S-cage", the patented s-cage combines the advantages of spring and wire cage in a one piece structure, the spring enables the tool free insertion of the conductor while the wire cage secures the conductor tightly, resulting a quick and reliable wiring solution.
- The release of the conductor is made easy, just by pressing of the bright orange color release button.
- High quality conducting material for low connection resistance and high conducting performance.
- Suitable for wire sizes from 1.5mm² to 35mm².
- The accessories are available for marking and bridging.

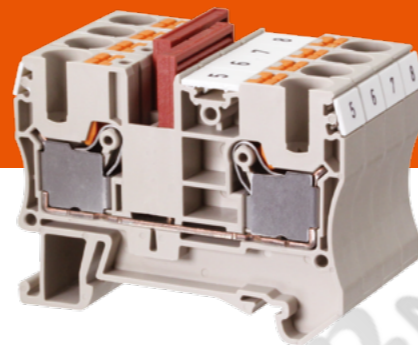

Push-In Design Terminal Blocks





Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².

The accessories are available for marking and bridging.

DP

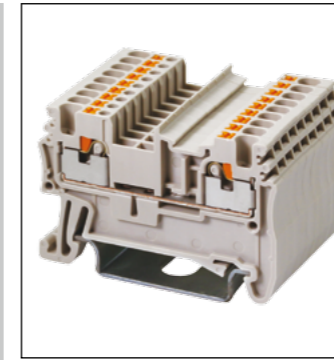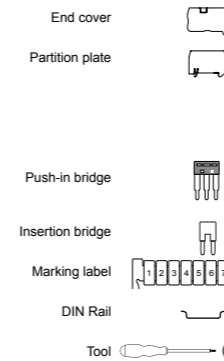


DP1.5		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x46.5	
Package	100	

color	Part number	Package
•	DP1.5-RD	100
•	DP1.5-BL	100

Accessories	Part number	Package
	DP1.5C	50
	AKSPS-001	50

2 way	DSD03-1.502	50
3 way	DSD03-1.503	50
4 way	DSD03-1.504	50
5 way	DSD03-1.505	10
10 way	DSD03-1.510	10

	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

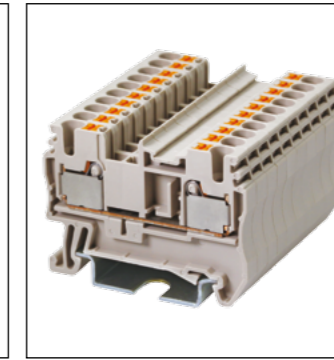


DP2.5		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x49	
Package	100	

color	Part number	Package
•	DP2.5-RD	100
•	DP2.5-BL	100

Accessories	Part number	Package
	DP2.5C	50
	AKSPS-001	50

2 way	DSD01-2.502N	50
3 way	DSD01-2.503N	50
4 way	DSD01-2.504N	50
5 way	DSD01-2.505N	10
10 way	DSD01-2.510N	10

	TM20 /TM36	10
	TS-35N	20
	0.6x3.5mm	/

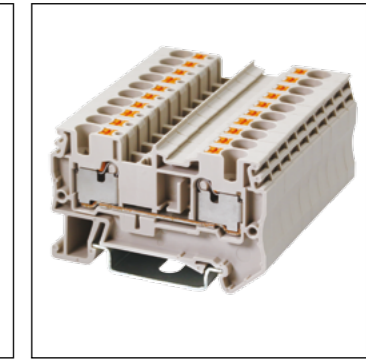

DP4		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x57	
Package	100	

color	Part number	Package
•	DP4-RD	100
•	DP4-BL	100

Accessories	Part number	Package
	DP4C	50
	AKSPS-001	50


2 way	DSD01-402N	50
3 way	DSD01-403N	50
4 way	DSD01-404N	50
5 way	DSD01-405N	10
10 way	DSD01-410N	10

	TM21 /TM37	10
	TS-35N	20
	0.6x3.5mm	/

備註DIN Rail 品號尺寸



Push-In Design Terminal Blocks

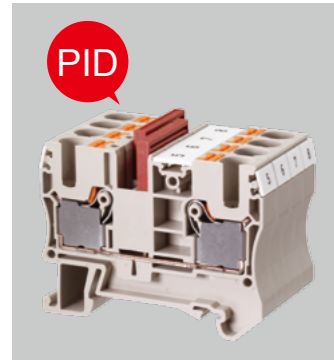



Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².

The accessories are available for marking and bridging.


DP

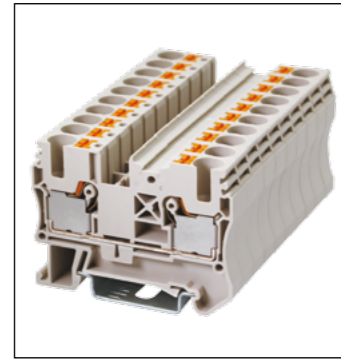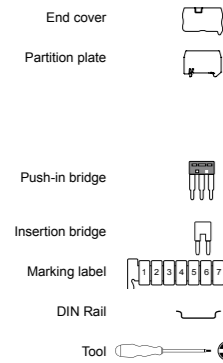

DP6		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	40A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x57.8	
Package	50	

color	Part number	Package
•	DP6-RD	100
•	DP6-BL	100

Accessories	Part number	Package
	DP6C	50
	AKSPS-002	50
	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10
	TM22 /TM38	10
	TS-35N	20
	0.8x4mm	/

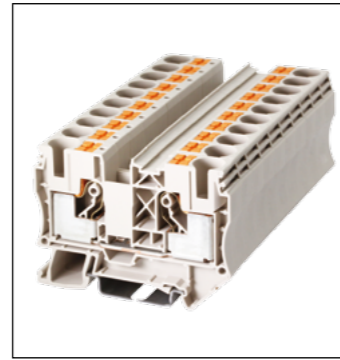

DP10		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	60A	57A
SOL wire(AWG/mm ²)	20~6 / 0.5~16	
STR wire(AWG/mm ²)	20~6 / 0.5~10	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x69	
Package	50	

color	Part number	Package
•	DP10-RD	50
•	DP10-BL	50

Accessories	Part number	Package
	DP2.5C	50
	AKSPS-001	50
	DSD01-1002N	50
	TM22 /TM39	10
	TS-35N	20
	1.0x5.5mm	/




DP15		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	60A	57A
SOL wire(AWG/mm ²)	20~6 / 0.5~16	
STR wire(AWG/mm ²)	20~6 / 0.5~10	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x69	
Package	50	

color	Part number	Package
•	DP15-RD	50
•	DP15-BL	50

Accessories	Part number	Package
	DP1.5C-TN	50
	AKSPS-003	50
	DSD03-1.502N	50
	DSD03-1.503N	50
	DSD03-1.504N	50
	DSD03-1.505N	10
	DSD03-1.510N	10
	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

Push-In Design Terminal Blocks

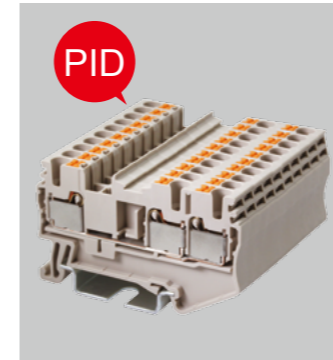



Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².

The accessories are available for marking and bridging.


DP

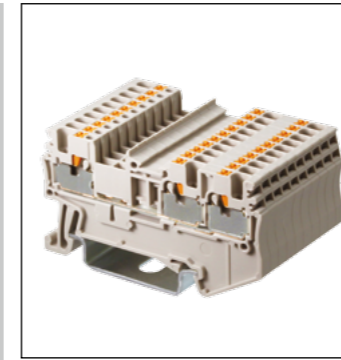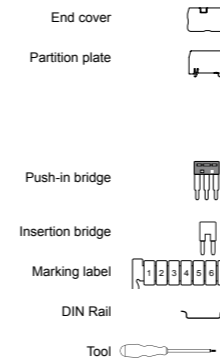

DP1.5-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30x58	
Package	100	

color	Part number	Package
•	DP1.5-RD	100
•	DP1.5-BL	100


Accessories	Part number	Package
	DP1.5C-TN	50
	AKSPS-003	50
	DSD03-1.502N	50
	DSD03-1.503N	50
	DSD03-1.504N	50
	DSD03-1.505N	10
	DSD03-1.510N	10
	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

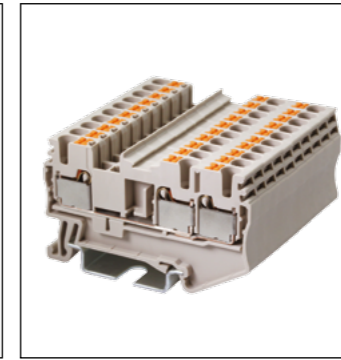

DP2.5-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x60.8	
Package	100	

color	Part number	Package
•	DP2.5-RD	100
•	DP2.5-BL	100

Accessories	Part number	Package
	DP2.5C	50
	AKSPS-001	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	TM20 /TM36	10
	TS-35N	20
	0.6x3.5mm	/

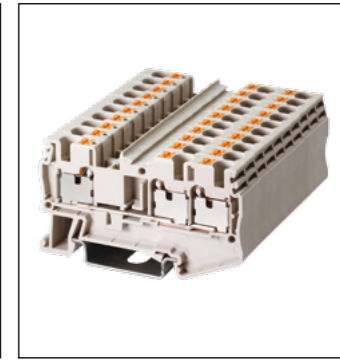


DP4-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x67.3	
Package	100	

color	Part number	Package
•	DP4-RD	100
•	DP4-BL	100

Accessories	Part number	Package
	DP4C	50
	AKSPS-001	50
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
	TM21 /TM37	10
	TS-35N	20
	0.8x4mm	/

Push-In Design Terminal Blocks

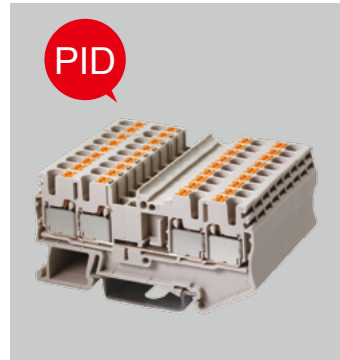



Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².

The accessories are available for marking and bridging.

DP

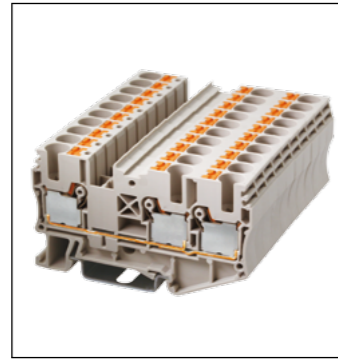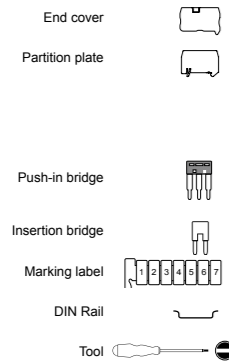

DP6-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	40A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x74.6	
Package	50	

color	Part number	Package
•	DP6-TN-RD	50
•	DP6-TN-BL	100

Accessories	Part number	Package
	DP6C-TN	50
	AKSPS-003	50
	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10
	TM22 /TM38	10
	TS-35N	20
	0.8x4mm	/



DP10		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package



DP15-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package
•	DP1.5-TR-RD	50
•	DP1.5-TR-BL	50

Accessories	Part number	Package
	DP1.5C-TR	50
	DSD03-1.502	50
	DSD03-1.503	50
	DSD03-1.504	50
	DSD03-1.505	10
	DSD03-1.510	10
	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

Push-In Design Terminal Blocks




Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².

The accessories are available for marking and bridging.


DP

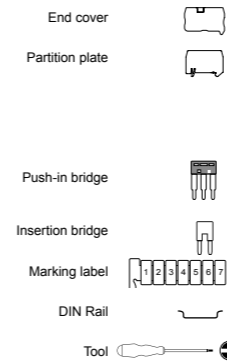

DP1.5-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x69.5	
Package	50	

color	Part number	Package
•	DP1.5-TR-RD	50
•	DP1.5-TR-BL	50


Accessories	Part number	Package
	DP1.5C-TR	50
	DSD03-1.502	50
	DSD03-1.503	50
	DSD03-1.504	50
	DSD03-1.505	10
	DSD03-1.510	10
	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

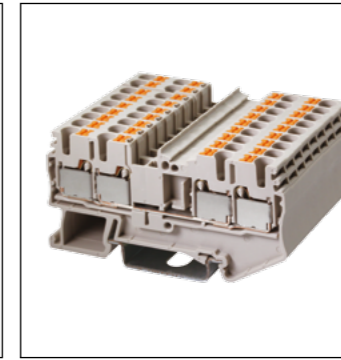

DP2.5-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x72.6	
Package	100	

color	Part number	Package
•	DP2.5-TR-RD	100
•	DP2.5-TR-BL	100

Accessories	Part number	Package
	DP2.5C-TR	50
	AKSPS-004	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	TM20 /TM36	10
	TS-35N	20
	0.6x3.5mm	/

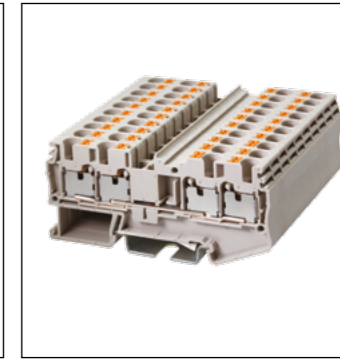

DP4-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x80.4	
Package	100	

color	Part number	Package
•	DP4-TR-RD	100
•	DP4-TR-BL	100

Accessories	Part number	Package
	DP4C-TR	50
	AKSPS-004	50
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
	TM21 /TM37	
	TS-35N	
	0.6x3.5mm	

Push-In Design Terminal Blocks

PID



Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

Suitable for wire sizes from 1.5mm² to 16mm².



The accessories are available for marking and bridging.

DP

DP6-TR		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	40A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x91.4	
Package	50	

color	Part number	Package
•	DP6-TR-RD	100
•	DP6-TR-BL	100

Accessories	Part number	Package
End cover	DP6C-TR	50
Partition plate		
Push-in bridge	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10
Insertion bridge		
Marking label	TM22 / TM38	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

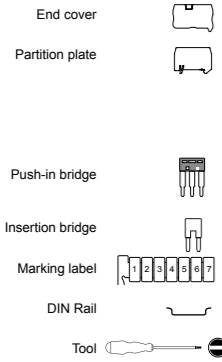

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package





Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Push-In Design Terminal Blocks

PID

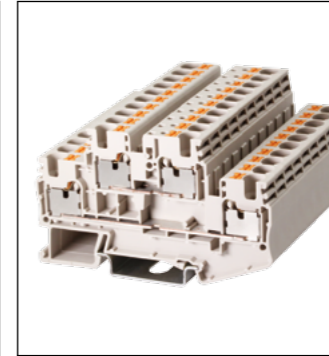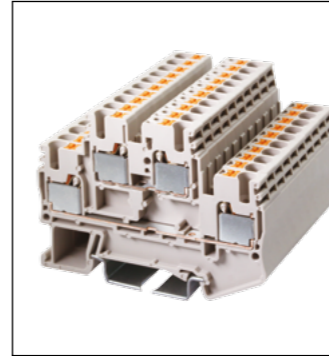

Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.


The accessories are available for marking and bridging.

DDP

DPP2.5		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	20A	22A
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	6KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46x69	
Package	100	

color	Part number	Package
•	DP1.5-RD	100
•	DP1.5-BL	100

Accessories	Part number	Package
End cover	DPP2.5C	50
Partition plate		
Push-in bridge	DSD01-2.502	50
	DSD01-2.503	50
	DSD01-2.504	50
	DSD01-2.505	10
	DSD01-2.510	10
Insertion bridge		
Marking label	TM20	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

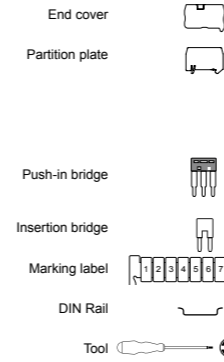

DPP4		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	30A	28A
SOL wire(AWG/mm ²)	24~10 / 0.6	
STR wire(AWG/mm ²)	24~10 / 0.4	
Rated impulse voltage	6KV	
Torque(N·m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x46x81	
Package	50	

color	Part number	Package
•	DP2.5-RD	100
•	DP2.5-BL	100

Accessories	Part number	Package
End cover	DPP4C	50
Partition plate		
Push-in bridge	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
Insertion bridge		
Marking label	TM21	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/



Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Push-In Design

Push-In Design Terminal Blocks

PID




Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

The accessories are available for marking and bridging.

DP

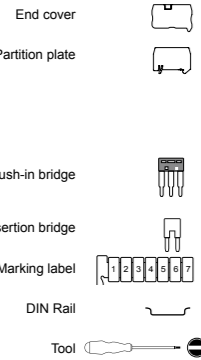

DP2.5-3L		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	12~26 / 0.14~4	
STR wire(AWG/mm ²)	12~26 / 0.14~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	102.7x58.5x5.1	
Package	50	

color	Part number	Package
•	DP2.5-3L-RD	50
•	DP2.5-3L-BL	50

Accessories	Part number	Package
	DP2.5C-3L	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	TM20	10
	TS-35N	20
	0.6x3.5mm	/



DP2.5-3L		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package




DP2.5-3L		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Push-In Design Terminal Blocks

PID





Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.

The accessories are available for marking and bridging.


DP..-PE

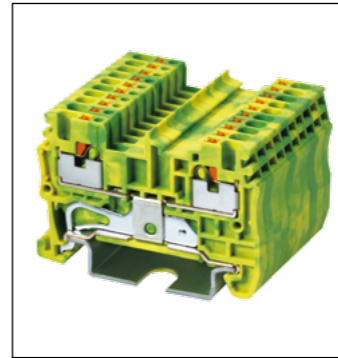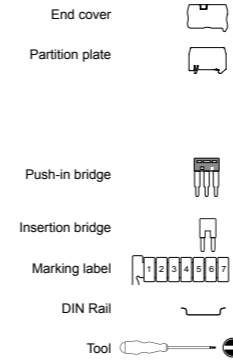

DP1.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	
Rated Current		
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x47.2	
Package	100	

color	Part number	Package
	DP1.5C-YG	50


Accessories	Part number	Package
	TM18 /TM34	10
	TS-35N	20
	0.4x2.5mm	/

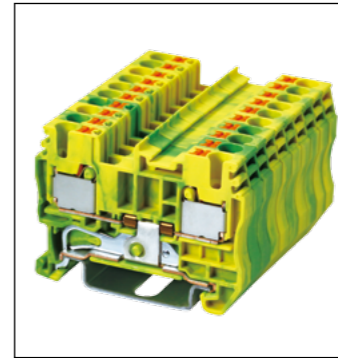

DP2.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x49	
Package	100	

color	Part number	Package
	DP2.5C-YG	50

Accessories	Part number	Package
	TM20 /TM36	10
	TS-35N	20
	0.6x3.5mm	/

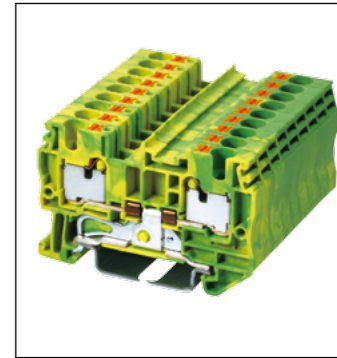


DP4-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x57	
Package	100	

color	Part number	Package
	DP4C-YG	50

Accessories	Part number	Package
	TM21 /TM37	10
	TS-35N	20
	0.6x3.5mm	/

Push-In Design Terminal Blocks


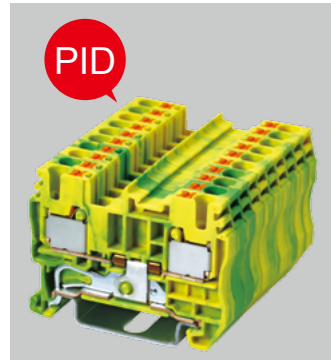


Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.


The accessories are available for marking and bridging.

DP..-PE

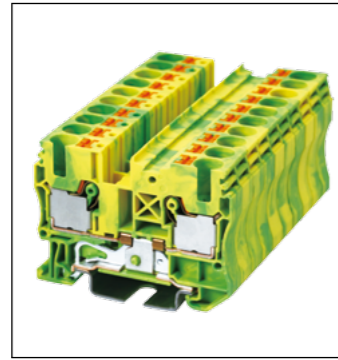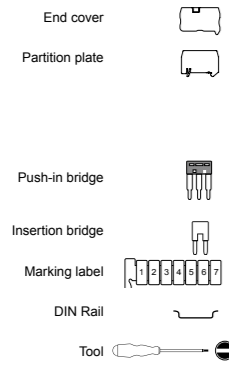


DP6-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x57.8	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DP6C-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label	TM22 / TM38	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

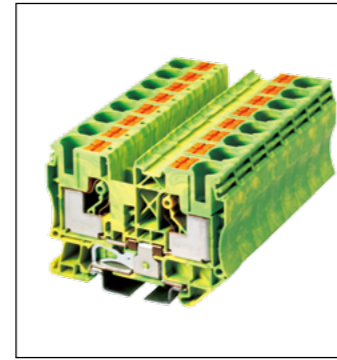

DP10-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	20~6 / 0.5~16	
STR wire(AWG/mm ²)	20~6 / 0.5~10	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x69	
Package	50	
color	Part number	Package


Accessories	Part number	Package
End cover	DP10C-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label	TM22 / TM39	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/



DP6-TN-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label		
DIN Rail		
Tool		

Push-In Design Terminal Blocks


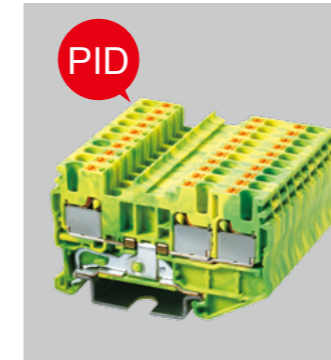


Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.

High quality conducting material for low connection resistance and high conducting performance.


The accessories are available for marking and bridging.

DP..-TN-PE

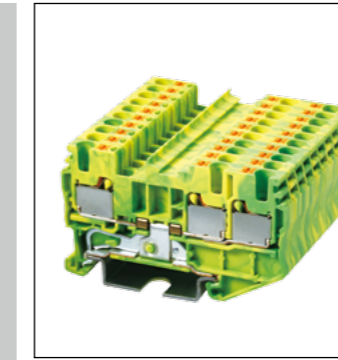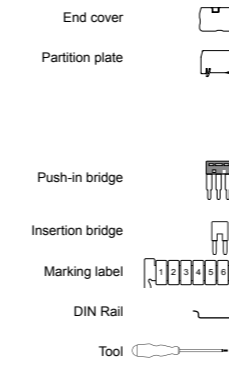


DP2.5-TN-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x60.8	
Package	100	
color	Part number	Package

Accessories	Part number	Package
End cover	DP2.5C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label	TM20 / TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

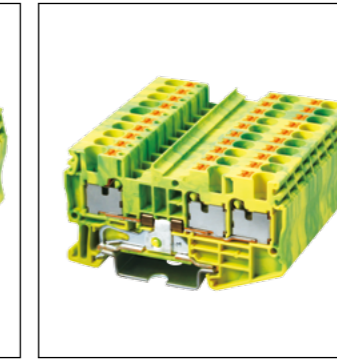

DP4-TN-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35.5x67.3	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DP4C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label	TM21 / TM37	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

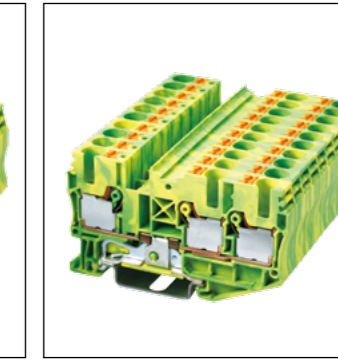


DP6-TN-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x74.6	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DP6C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Marking label	TM22 / TM38	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

Push-In Design Terminal Blocks

PID




Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.


High quality conducting material for low connection resistance and high conducting performance.

The accessories are available for marking and bridging.


DP..-TR-PE

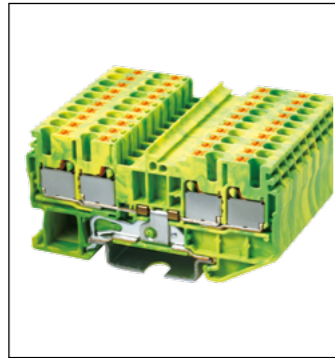

DP2.5-TR-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x72.6	
Package	50	
color	Part number	Package

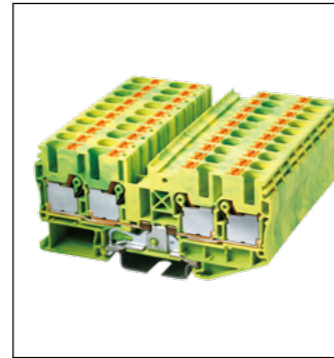

DP4-TR-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35.5x80.4	
Package	50	
color	Part number	Package

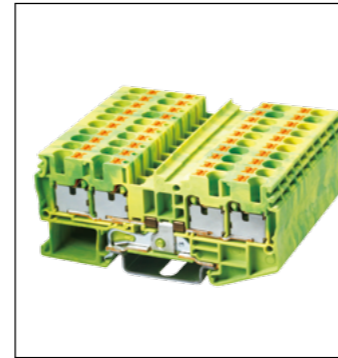

DP6-TR-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	
Rated Current		
SOL wire(AWG/mm ²)	20~8 / 0.5~10	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	13mm	
Insulation materials	PA	
TxHxW(mm)	8x42x74.6	
Package	50	
color	Part number	Package


Accessories	Part number	Package
End cover	DP2.5C-TR-YG	50
Partition plate		
Push-in bridge	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
Insertion bridge		
Marking label	TM20 /TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Accessories	Part number	Package
End cover	DP4C-TR-YG	50
Partition plate		
Push-in bridge	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
Insertion bridge		
Marking label	TM21 /TM37	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

Accessories	Part number	Package
End cover	DP6C-TR-YG	50
Partition plate		
Push-in bridge	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10
Insertion bridge		
Marking label	TM22 /TM38	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

Push-In Design Terminal Blocks

PID




Adopting PID (Push-In Design), allows solid conductor direct insertion without tool for quick connections.


High quality conducting material for low connection resistance and high conducting performance.

The accessories are available for marking and bridging.

DPP..-PE

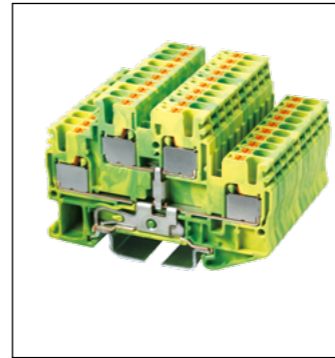

DPP2.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	226~12 / 0.14~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46x69	
Package	100	
color	Part number	Package

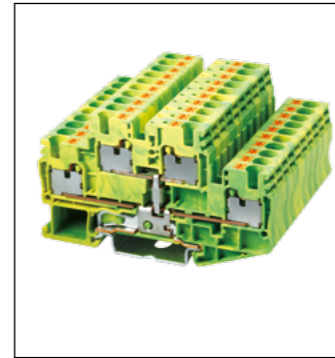


DPP4-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x46.5x81	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DPP2.5C-YG	50
Partition plate		
Push-in bridge	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
Insertion bridge		
Marking label	TM20	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/


Accessories	Part number	Package
End cover	DPP4C-YG	50
Partition plate		
Push-in bridge	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
Insertion bridge		
Marking label	TM21	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

Feed-Through Spring Clamp Connection Terminal Blocks

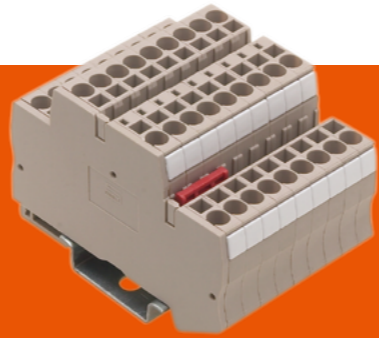

- Adopting the spring clamp for wiring, easy to use, strong clamping force, vibration proof.
- High quality conducting material for low connection resistance and high conducting performance.
- Suitable for wire sizes from 1.5mm² to 35mm².
- Single and double level feed-through types, functional types are available.
- Accessories include marking labels, bridges and partition plates, etc.

Feed-Through Spring Clamp Connection Terminal Blocks

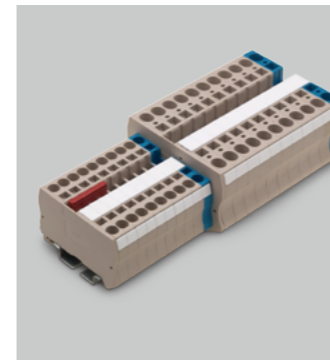

Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.

Compact size, with wide clamping range and can accommodate wire with ferrules easily.


Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK

End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label		
DIN Rail		
Tool		

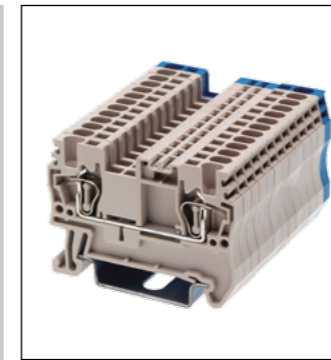


AK1.5		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	30~14 / 0.14~1.5	
STR wire(AWG/mm ²)	30~14 / 0.14~1.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	4.2x35x49	
Package	100	

color	Part number	Package
•	AK1.5-RD	100
•	AK1.5-BL	100

Accessories	Part number	Package
	AK2.5C	50
	AKSPS-001	50

2 way	DSD01-1.502	50
3 way	DSD01-1.503	50
4 way	DSD01-1.504	50
5 way	DSD01-1.505	10
10 way	DSD01-1.510	10

	TM19 / TM35	10
	TS-35N	20
	0.4x2.5mm	/

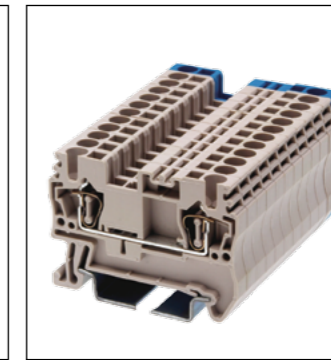


AK2.5		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x49	
Package	100	

color	Part number	Package
•	AK2.5-RD	100
•	AK2.5-BL	100

Accessories	Part number	Package
	AK2.5C	50
	AKSPS-001	50

	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10

	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

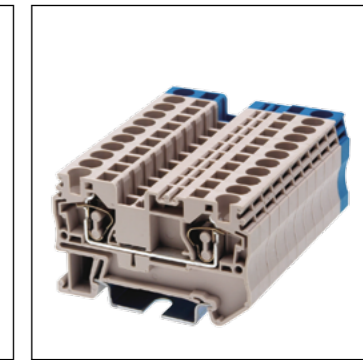

AK4		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	25A	32A
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x57	
Package	100	


color	Part number	Package
•	AK4-RD	100
•	AK4-BL	100

Accessories	Part number	Package
	AK4C	50
	AKSPS-001	50

	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10


	TM21 / TM37	10
	TS-35N	20
	0.6x3.5mm	/

Feed-Through Spring Clamp Connection Terminal Blocks

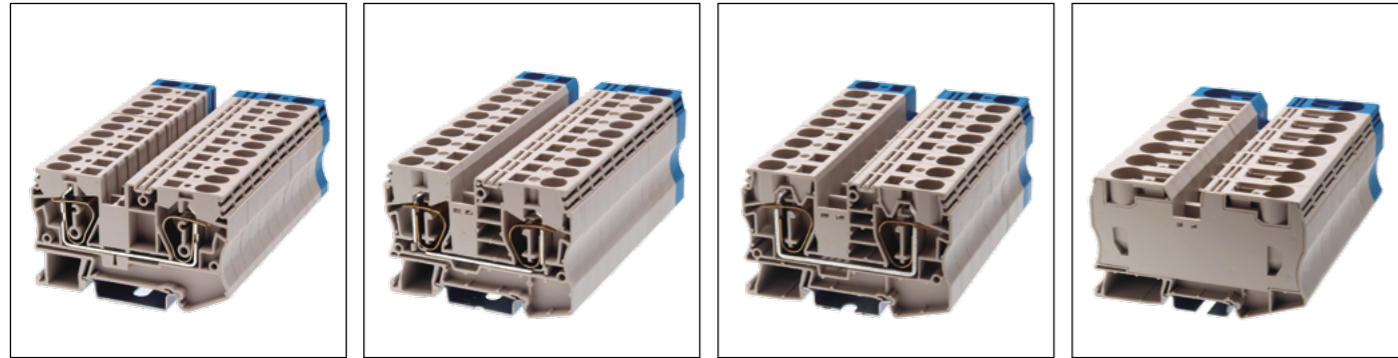

AK6			AK10			AK16			AK35		
Safety certification			Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	600V	800V	Rated Voltage	600V	800V	Rated Voltage	600V	800V	Rated Voltage	600V	1000V
Rated Current	35A	41A	Rated Current	51A	57A	Rated Current	66A	76A	Rated Current	105A	125A
SOL wire(AWG/mm ²)	24~8 / 0.5~6		SOL wire(AWG/mm ²)	24~6 / 1.5~10		SOL wire(AWG/mm ²)	24~4 / 1.5~16		SOL wire(AWG/mm ²)	14~2 / 2.5~35	
STR wire(AWG/mm ²)	24~8 / 0.5~6		STR wire(AWG/mm ²)	24~6 / 1.5~10		STR wire(AWG/mm ²)	24~4 / 1.5~16		STR wire(AWG/mm ²)	14~2 / 2.5~35	
Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV	
Torque(N-m)			Torque(N-m)			Torque(N-m)			Torque(N-m)		
Screws			Screws			Screws			Screws		
Stripping length	12mm		Stripping length	18mm		Stripping length	18mm		Stripping length	25mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	8x42x69.5		TxHxW(mm)	10x49.7x71.1		TxHxW(mm)	12x50.4x80.2		TxHxW(mm)	16x58.4x99.6	
Package	50		Package	50		Package	50		Package	20	
color	Part number	Package	color	Part number	Package	color	Part number	Package	color	Part number	Package
•	AK6-RD	50	•	AK10-RD	50	•	AK16-RD	50	•	AK35-RD	50
•	AK6-BL	50	•	AK10-BL	50	•	AK16-BL	50	•	AK35-BL	50
Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
	AK6C	50		AK10C	50		AK16C	50			
	AKSPS-002	50									
2 way	DSD01-602	50									
3 way	DSD01-603	50									
4 way	DSD01-604	50									
5 way	DSD01-605	10									
10 way	DSD01-610	10									
				DSD01-1002N	10		DSD01-1602N	10		DSD01-3502N	10
	TM22 / TM38	10		TM22 / TM39	10		TM22 / TM39	10		TM22 / TM39	10
	TS-35N	20		TS-35N	20		TS-35N	20		TS-35N	20
	0.8x4mm	/		1.0x5.5mm	/		1.0x5.5mm	/		1.0x5.5mm	/

Feed-Through Spring Clamp Connection Terminal Blocks

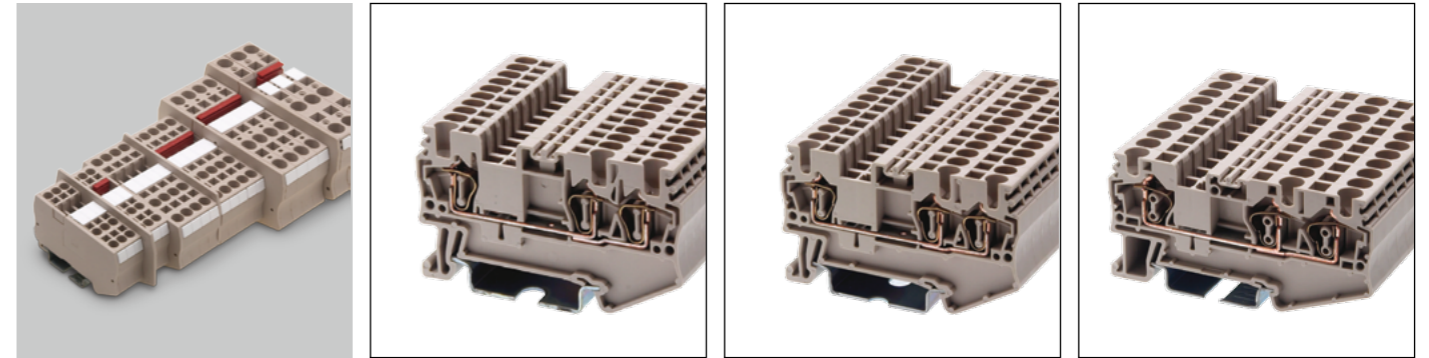

Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.

Compact size, with wide clamping range and can accommodate wire with ferrules easily.



Suitable for wire sizes form 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.





Accessories are complete, easy for identification, testing or bridging applications.

AK...-TN

AK1.5-TN			AK2.5-TN			AK4-TN		
Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	630V	Rated Voltage	600V	800V	Rated Voltage	600V	800V
Rated Current	15A	17.5A	Rated Current	20A	24A	Rated Current	30A	32A
SOL wire(AWG/mm ²)	30~14 / 0.14~1.5		SOL wire(AWG/mm ²)	30~12 / 0.2~2.5		SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	30~14 / 0.14~1.5		STR wire(AWG/mm ²)	30~12 / 0.2~2.5		STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV	
Torque(N-m)			Torque(N-m)			Torque(N-m)		
Screws			Screws			Screws		
Stripping length	10mm		Stripping length	10mm		Stripping length	10mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	4.2x35x60.8		TxHxW(mm)	5.1x35x60.8		TxHxW(mm)	6.1x35x72.5	
Package	100		Package	50		Package	100	
color	Part number	Package	color	Part number	Package	color	Part number	Package
•	AK1.5-TN-RD	100	•	AK2.5-TN-RD	100	•	AK4-TN-RD	100
•	AK1.5-TN-BL	100	•	AK2.5-TN-BL	100	•	AK4-TN-BL	100
Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
	AK2.5C-TN	50		AK2.5C-TN	50		AK4C-TN	50
	AKSPS-003	50		AKSPS-003	50		AKSPS-003	50
2 way	DSD01-1.502N	50		DSD01-2.502N	50		DSD01-402N	50
3 way	DSD01-1.503N	50		DSD01-2.503N	50		DSD01-403N	50
4 way	DSD01-1.504N	50		DSD01-2.504N	50		DSD01-404N	50
5 way	DSD01-1.505N	10		DSD01-2.505N	10		DSD01-405N	10
10 way	DSD01-1.510N	10		DSD01-2.510N	10		DSD01-410N	10
	TM19 / TM35	10		TM20 / TM36	10		TM21 / TM37	10
	TS-35N	20		TS-35N	20		TS-35N	20
	0.4x2.5mm	/		0.6x3.5mm	/		0.6x3.5mm	/

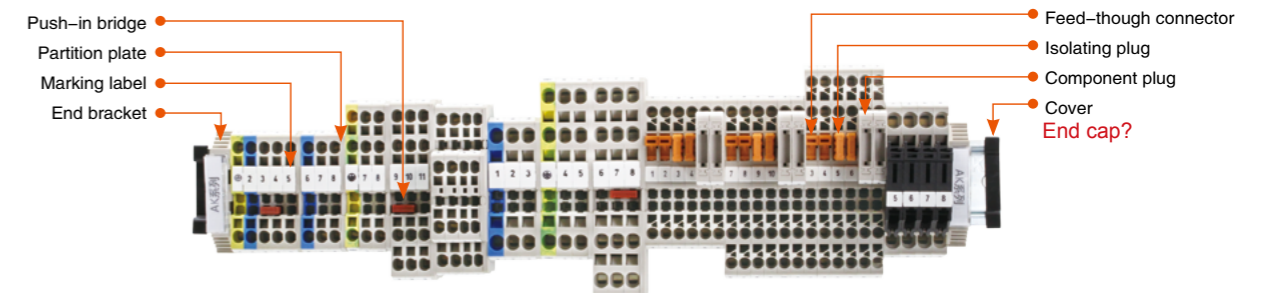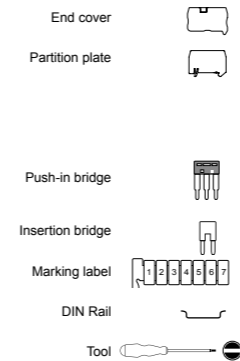

Feed-Through Spring Clamp Connection Terminal Blocks

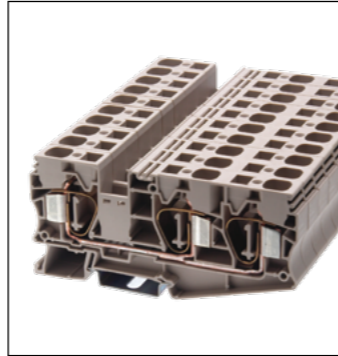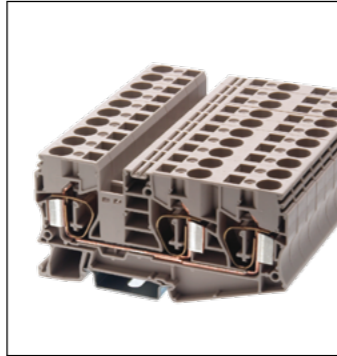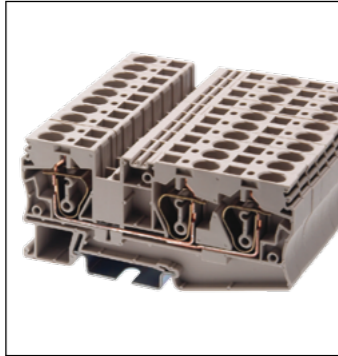

Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK...-TN




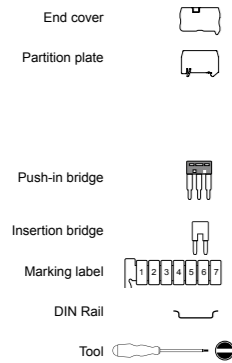


AK6-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	35A	41A
SOL wire(AWG/mm ²)	24~8 / 0.5~6	
STR wire(AWG/mm ²)	24~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	8x42x90.5	
Package	50	
color	Part number	Package
•	AK6-TN-RD	100
•	AK6-TN-BL	100
Accessories	Part number	Package
	AK6C-TN	50
	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10
	TM22 / TM38	10
	TS-35N	20
	0.8x4mm	/

AK10-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	40A	57A
SOL wire(AWG/mm ²)	24~6 / 1.5~10	
STR wire(AWG/mm ²)	24~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x96.8	
Package	50	
color	Part number	Package
•	AK10-TN-RD	100
•	AK10-TN-BL	100
Accessories	Part number	Package
	AK10C-TN	50
	DSD01-1002N	50
	TM22 / TM39	10
	TS-35N	20
	1.0x5.5mm	/

AK16-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	66A	76A
SOL wire(AWG/mm ²)	24~4 / 1.5~16	
STR wire(AWG/mm ²)	24~4 / 1.5~16	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	12x50.4x108.2	
Package	20	
color	Part number	Package
•	DP10-RD	50
•	DP10-BL	50
Accessories	Part number	Package
	AK16C-TN	50
	DSD01-1602N	50
	TM22 / TM39	10
	TS-35N	20
	1.0x5.5mm	/

Feed-Through Spring Clamp Connection Terminal Blocks

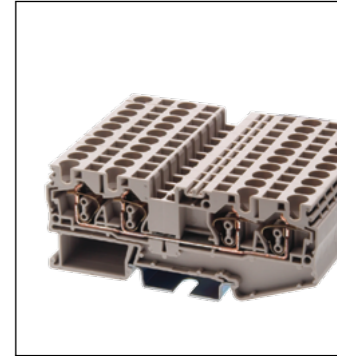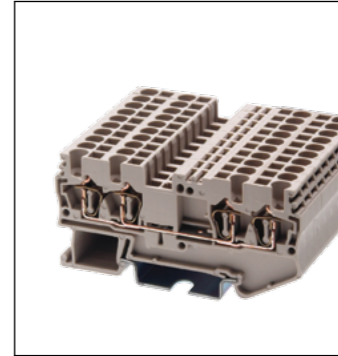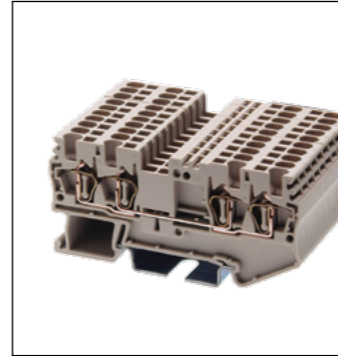

Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK...-TR

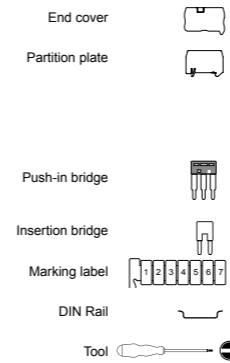


AK1.5-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N·m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x46.5	
Package	100	
color	Part number	Package
•	DP1.5-RD	100
•	DP1.5-BL	100
Accessories	Part number	Package
	DP1.5C	50
	AKSPS-001	50
	DSD03-1.502	50
	DSD03-1.503	50
	DSD03-1.504	50
	DSD03-1.505	10
	DSD03-1.510	10
	TM18 / TM34	10
	TS-35N	20
	0.4x2.5mm	/

AK2.5-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	26~12 / 0.14~4	
STR wire(AWG/mm ²)	26~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x49	
Package	100	
color	Part number	Package
•	DP2.5-RD	100
•	DP2.5-BL	100
Accessories	Part number	Package
	DP2.5C	50
	AKSPS-001	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

AK4-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	24~10 / 0.2~6	
STR wire(AWG/mm ²)	24~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x57	
Package	100	
color	Part number	Package
•	DP4-RD	100
•	DP4-BL	100
Accessories	Part number	Package
	DP4C	50
	AKSPS-001	50
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
	TM21 / TM37	10
	TS-35N	20
	0.6x3.5mm	/

Feed-Through Spring Clamp Connection Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK...-TR

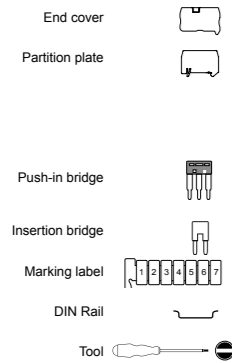

AK6-TR

Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	36A	41A
SOL wire(AWG/mm ²)	24~8 / 0.5~6	
STR wire(AWG/mm ²)	24~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	8x42x111.5	
Package	50	

color	Part number	Package
•	AK6-RE-RD	50
•	AK6-RE-BL	50


Accessories	Part number	Package
	AK6C-TR	50

	DSD01-602N	50
	DSD01-603N	50
	DSD01-604N	50
	DSD01-605N	10
	DSD01-610N	10

	TM22 / TM38	10
--	-------------	----

	TS-35N	20
--	--------	----

	0.8x4mm	/
--	---------	---



Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package


--	--	--

--	--	--

--	--	--

--	--	--

Bi-level Spring Clamp Connection Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.



Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AKK

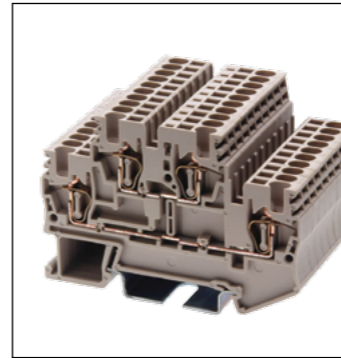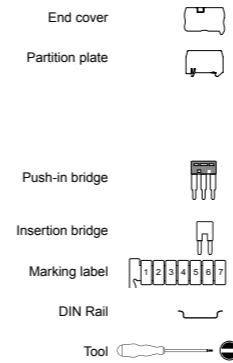

AKK1.5

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	4.2x46x68	
Package	100	

color	Part number	Package
•	AKK1.5-RD	100
•	AKK1.5-BL	100


Accessories	Part number	Package
	AKK2.5C	50

2 way	DSD01-1.502N	50
3 way	DSD01-1.503N	50
4 way	DSD01-1.504N	50
5 way	DSD01-1.505N	10
10 way	DSD01-1.510N	10

	TM19	10
--	------	----

	TS-35N	20
--	--------	----

	0.4x2.5mm	/
--	-----------	---

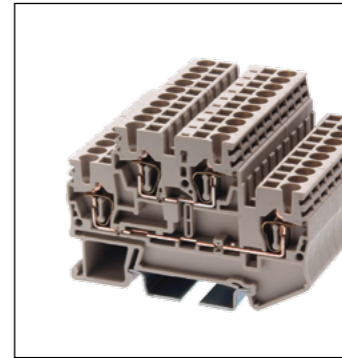

AKK2.5

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	20A	20A
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46x68	
Package	100	

color	Part number	Package
•	AKK2.5-RD	100
•	AKK2.5-BL	100


Accessories	Part number	Package
	AKK2.5C	50

	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10

	TM20	10
--	------	----

	TS-35N	20
--	--------	----

	0.6x3.5mm	/
--	-----------	---

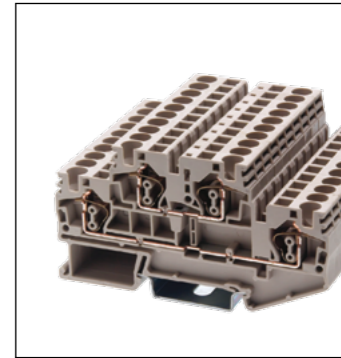

AKK4

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	25A	28A
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x46x86	
Package	50	

color	Part number	Package
•	AKK4-RD	50
•	AKK4-BL	50

Accessories	Part number	Package
	AKK4C	50


	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10

	TM21	10
--	------	----

	TS-35N	20
--	--------	----

	0.6x3.5mm	/
--	-----------	---

Bi-level Spring Clamp Connection Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.

Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AKK...-PV



AKK2.5-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	240A	20A
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46x68	
Package	100	

color	Part number	Package
•	AKK2.5-PV-RD	100
•	AKK2.5-PV-BL	100

Accessories	Part number	Package
End cover	AKK2.5C	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM20	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/



Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label		
DIN Rail		
Tool		




Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label		
DIN Rail		
Tool		

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.


AK...-PE

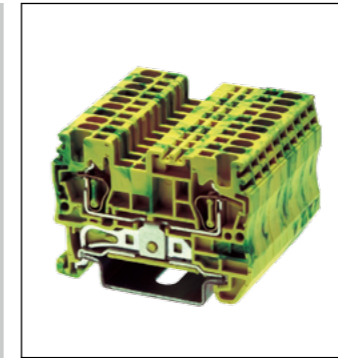

AK1.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~14 / 0.14~1.5	
STR wire(AWG/mm ²)	30~14 / 0.14~1.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	4.2x35.5x49	
Package	100	

color	Part number	Package


Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/

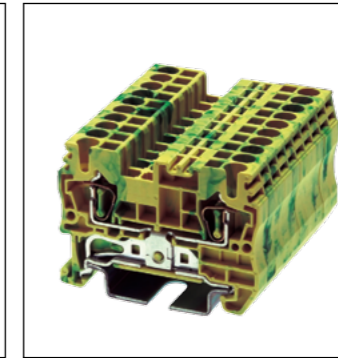

AK2.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35x49	
Package	100	

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM20 / TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

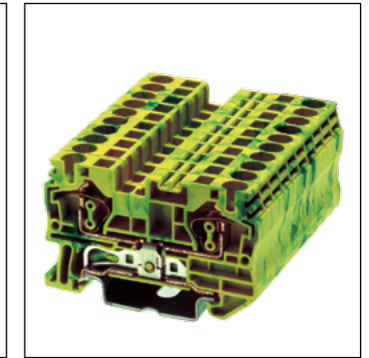


AK4-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35x57	
Package	100	

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM21 / TM37	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.



Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes form 1.5mm² to 35mm².


High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.


AK...-PE

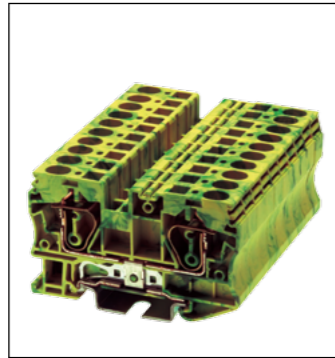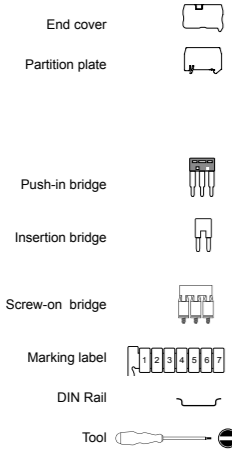

AK6-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	24~8 / 0.5~6	
STR wire(AWG/mm ²)	24~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	8x42x69.5	
Package	50	
color	Part number	Package

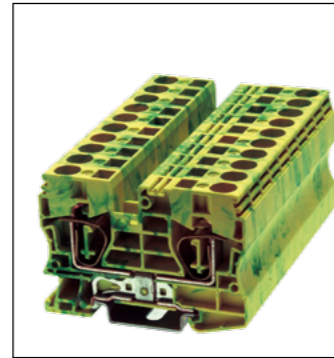

AK10-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current	57A	
SOL wire(AWG/mm ²)	24~6 / 1.5~10	
STR wire(AWG/mm ²)	24~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x71.1	
Package	50	
color	Part number	Package

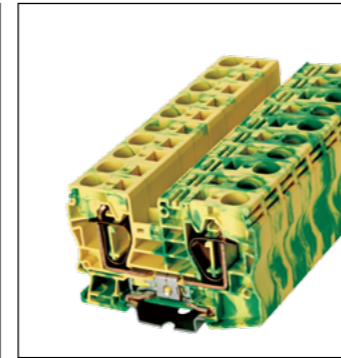


AK16-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current	76A	
SOL wire(AWG/mm ²)	24~4 / 1.5~16	
STR wire(AWG/mm ²)	24~4 / 1.5~16	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	12x50.4x80.2	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	AK6C-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM22 / TM38	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

Accessories	Part number	Package
End cover	AK10C-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM22 / TM39	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

Accessories	Part number	Package
End cover	AK16C-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM22 / TM39	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.



Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes form 1.5mm² to 35mm².


High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.


AK...-TN-PE

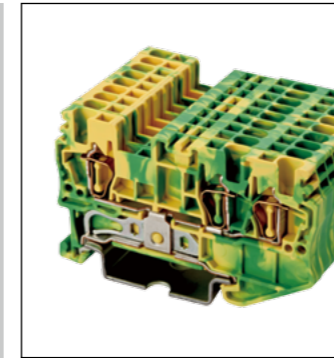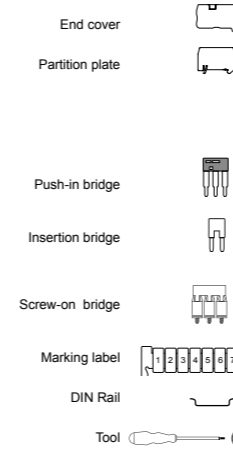

AK1.5-TN-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~14 / 0.14~1.5	
STR wire(AWG/mm ²)	30~14 / 0.14~1.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	4.2x35.5x60.8	
Package	50	
color	Part number	Package

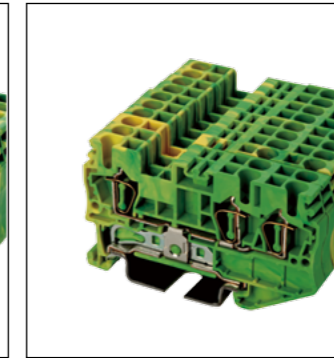

AK2.5-TN-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35.5x60.8	
Package	50	
color	Part number	Package

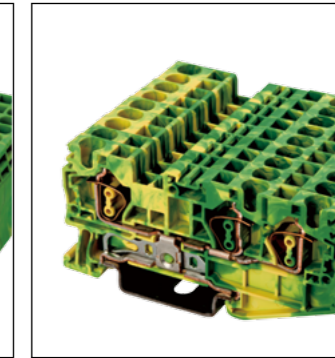


AK4-TN-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35.5x75.5	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	AK2.5C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/

Accessories	Part number	Package
End cover	AK2.5C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM20 / TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Accessories	Part number	Package
End cover	AK4C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM21 / TM37	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes form 1.5mm² to 35mm².


High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK...-TN-PE

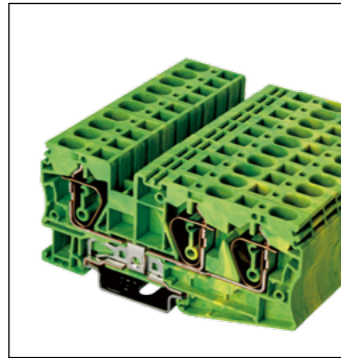

AK6-TN-PE		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	24~8 / 0.5~6	
STR wire(AWG/mm ²)	24~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	8x42x90.5	
Package	50	
color	Part number	Package

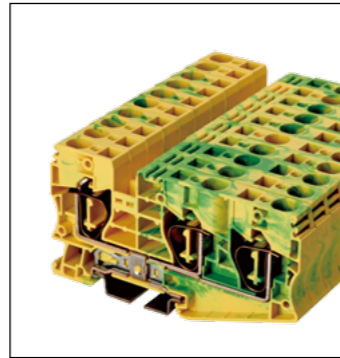

AK10-TN-PE		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage		
Rated Current		57A
SOL wire(AWG/mm ²)	24~6 / 1.5~10	
STR wire(AWG/mm ²)	24~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	18mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x96.8	
Package	50	
color	Part number	Package




Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
color	Part number	Package

Accessories	Part number	Package
End cover	AK6C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM22 / TM38	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

Accessories	Part number	Package
End cover	AK10C-TN-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM22 / TM39	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label		
DIN Rail		
Tool		

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.


Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes form 1.5mm² to 35mm².


High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.


AK...-TR-PE

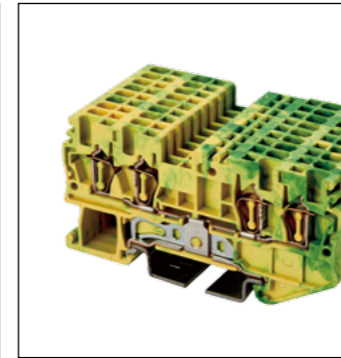

AK1.5-TR-PE		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~14 / 0.14~1.5	
STR wire(AWG/mm ²)	30~14 / 0.14~1.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	4.2x35.5x72.6	
Package	100	
color	Part number	Package

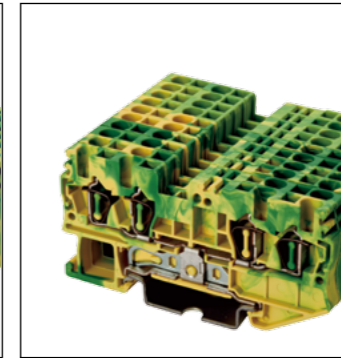

AK2.5-TR-PE		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x35.5x72.6	
Package	50	
color	Part number	Package

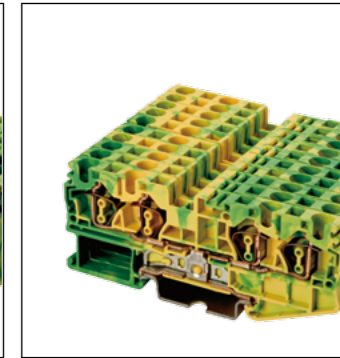


AK4-TR-PE		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x35.5x88	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	AK2.5C-TR-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/

Accessories	Part number	Package
End cover	AK2.5C-TR-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM20 / TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Accessories	Part number	Package
End cover	AK4C-TR-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM21 / TM37	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Spring Clamp Connection Grounding Terminal Blocks



Wiring made easy, only a slotted screwdriver is required for wire insertion and removal.



Compact size, with wide clamping range and can accommodate wire with ferrules easily.

Suitable for wire sizes from 1.5mm² to 35mm².

High resistance to vibration, suitable for rail transport, mechanical processing applications.

Accessories are complete, easy for identification, testing or bridging applications.

AK...-TR-PE

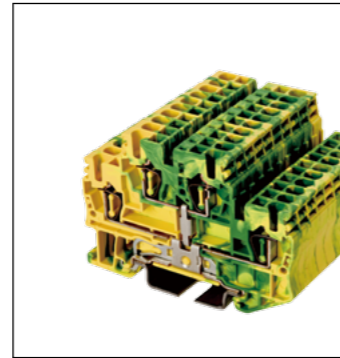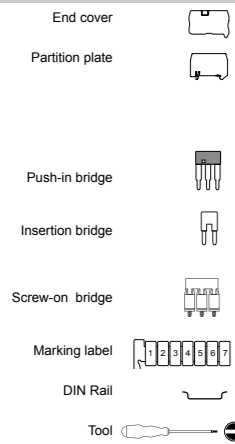

AK6-TR-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	24~8 / 0.5~6	
STR wire(AWG/mm ²)	24~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	12mm	
Insulation materials	PA	
TxHxW(mm)	8x42x111.5	
Package	50	
color	Part number	Package

color	Part number	Package

Accessories	Part number	Package
End cover	AK6C-TR-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/

AKK2.5-PE		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	30~12 / 0.2~2.5	
STR wire(AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46.5x68	
Package	100	
color	Part number	Package

color	Part number	Package

Accessories	Part number	Package
End cover	AKK2.5C-TR-YG	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/




Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
color	Part number	Package

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM19 / TM35	10
DIN Rail	TS-35N	20
Tool	0.4x2.5mm	/

Disconnect Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.




High quality conducting material is used to provide low connection resistance, high conductivity.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

AK...-TP

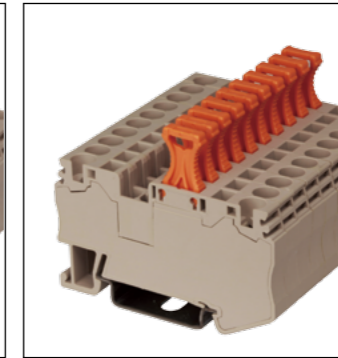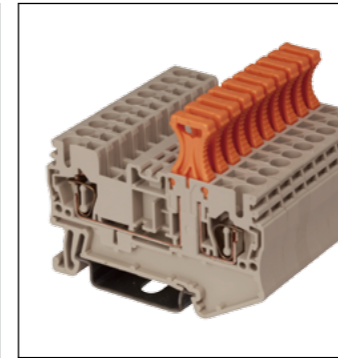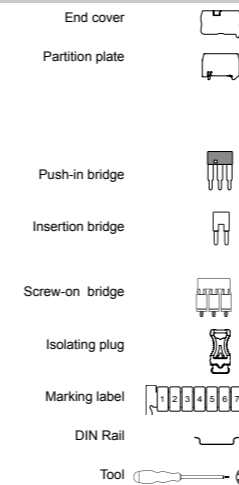

AK2.5-TP		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	16A	21A
SOL wire(AWG/mm ²)	28~12 / 0.2~2.5	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x49.1x60.8	
Package	100	
color	Part number	Package


color	Part number	Package
•	AK2.5-TP-RD	100
•	AK2.5-TP-BL	100

Accessories	Part number	Package
End cover	AK2.5C-TN	50
Partition plate	AKSPS-003	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Isolating plug	AKP-TP	10
Marking label	TM20 / TM36	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

AK4-TP		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20A	30A
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x49.1x61.8	
Package	100	
color	Part number	Package

color	Part number	Package
•	AK4-TP-RD	100
•	AK4-TP-BL	100


Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Isolating plug	AKP-TP	10
Marking label	TM21	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

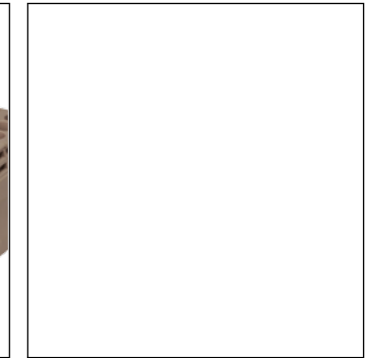

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
color	Part number	Package

color	Part number	Package

Accessories	Part number	Package
End cover		
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Isolating plug		
Marking label		
DIN Rail		
Tool		



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.

High quality conducting material is used to provide low connection resistance, high conductivity.


Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

AK...-TP


- End cover
- Partition plate
- Push-in bridge
- Insertion bridge
- Screw-on bridge
- Isolating plug
- Marking label
- DIN Rail
- Tool

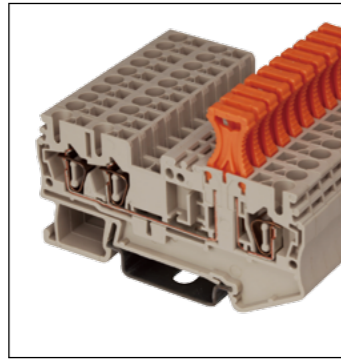

AK2.5-TN-TP		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	16A	21A
SOL wire(AWG/mm ²)	28~12 / 0.2~2.5	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x49.1x72.6	
Package	100	

color	Part number	Package
●	AK2.5-TP-RD	100
●	AK2.5-TP-BL	100


Accessories	Part number	Package
	AK2.5C-TN	50
	AKSPS-004	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-TP	10
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

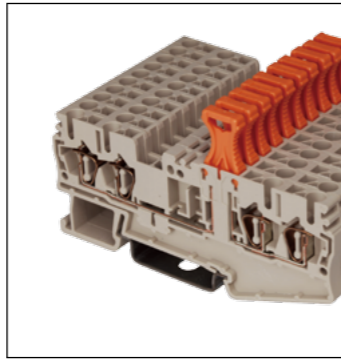

AK2.5-TR-TP		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20A	30A
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x49.1x84.4	
Package	100	

color	Part number	Package
●	AK2.5-TP-RD	100
●	AK2.5-TP-BL	100

Accessories	Part number	Package
	AK2.5C-TR-T	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-TP	10
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/



Safety certification		
Specification	UL	IEC

color	Part number	Package

Accessories	Part number	Package



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.

High quality conducting material is used to provide low connection resistance, high conductivity.


Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

AK...-TG


- End cover
- Partition plate
- Push-in bridge
- Insertion bridge
- Screw-on bridge
- Feed-through connector
- Marking label
- DIN Rail
- Tool

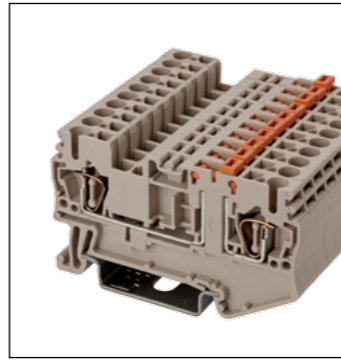

AK2.5-TG		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	16A	21A
SOL wire(AWG/mm ²)	28~12 / 0.2~2.5	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x49.1x72.6	
Package	100	

color	Part number	Package
●	AK2.5-TG-RD	100
●	AK2.5-TG-BL	100


Accessories	Part number	Package
	AK2.5C-TN	50
	AKSPS-003	50
2 way	DSD01-2.502N	50
3 way	DSD01-2.503N	50
4 way	DSD01-2.504N	50
5 way	DSD01-2.505N	10
10 way	DSD01-2.510N	10
	AKP-TP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

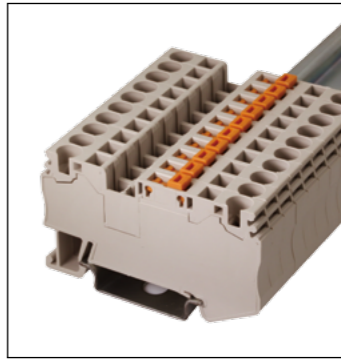

AK4-TG		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20A	30A
SOL wire(AWG/mm ²)	28~10 / 0.2~4	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x49.1x84.4	
Package	100	

color	Part number	Package
●	AK4-TG-RD	100
●	AK4-TG-BL	100

Accessories	Part number	Package
	AKSPS-003	50
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
	AKP-TP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/




Safety certification		
Specification	UL	IEC

color	Part number	Package

Accessories	Part number	Package

Disconnect Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.



High quality conducting material is used to provide low connection resistance, high conductivity.



Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

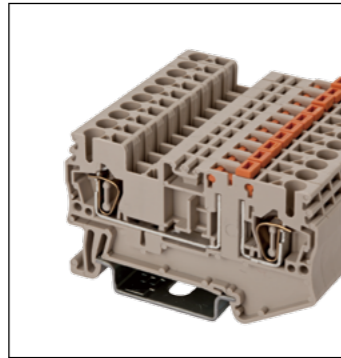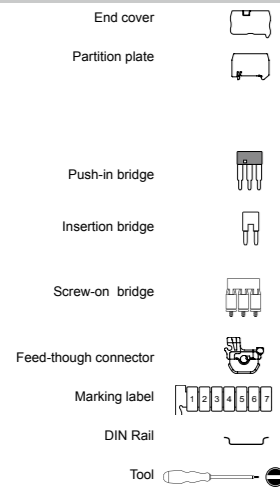
AK...TG





AK2.5-TG		
Safety certification  		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	16A	21A
SOL wire(AWG/mm ²)	28~12 / 0.2~2.5	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x36.7x72.6	
Package	50	

color	Part number	Package
•	AK2.5-TN-TG-RD	100
•	AK2.5-TN-TG-BL	100

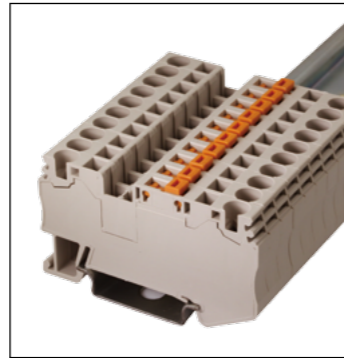
Accessories	Part number	Package
	AK2.5C-TR	50
	AKSPS-004	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-TP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/





AK4-TG		
Safety certification  		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	16A	21A
SOL wire(AWG/mm ²)	28~12 / 0.2~2.5	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x36.7x84.4	
Package	50	

color	Part number	Package
•	AK4-TG-RD	100
•	AK4-TG-BL	100

Accessories	Part number	Package
	AK2.5C-TR-T	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-TP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/




AK2.5-CP		
Safety certification  		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6A	6A
SOL wire(AWG/mm ²)	28~12 / 0.2~4	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x56.2x60.8	
Package	50	

color	Part number	Package
•	AK2.5-CP-RD	50
•	AK2.5-CP-BL	50

Accessories	Part number	Package
	AK2.5C-TN	50
	AKSPS-003	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-CP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

Disconnect Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.



High quality conducting material is used to provide low connection resistance, high conductivity.



Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.


AK...CP

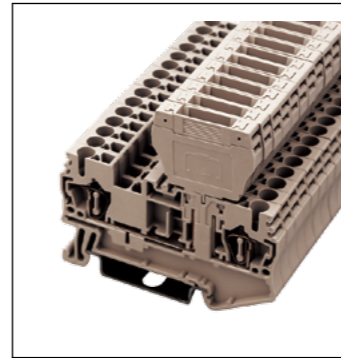
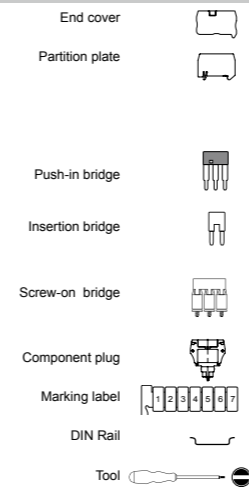


AK4-CP		
Safety certification  		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6A	6A
SOL wire(AWG/mm ²)	28~10 / 0.2~6	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x56.2x61.8	
Package	100	

color	Part number	Package
•	AK4-CP-RD	100
•	AK4-CP-BL	100


Accessories	Part number	Package
	AK4-CP	50
	AKSPS-003	50
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10
	AKP-CP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

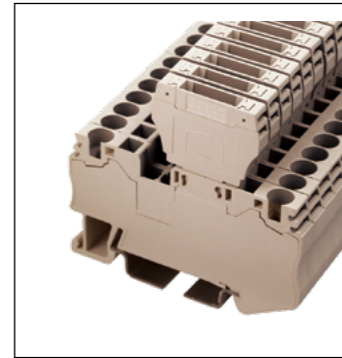


AK2.5-CP		
Safety certification  		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6A	6A
SOL wire(AWG/mm ²)	28~12 / 0.2~4	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x56.2x60.8	
Package	50	

color	Part number	Package
•	AK2.5-CP-RD	50
•	AK2.5-CP-BL	50

Accessories	Part number	Package
	AK2.5C-TN	50
	AKSPS-003	50
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10
	AKP-CP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

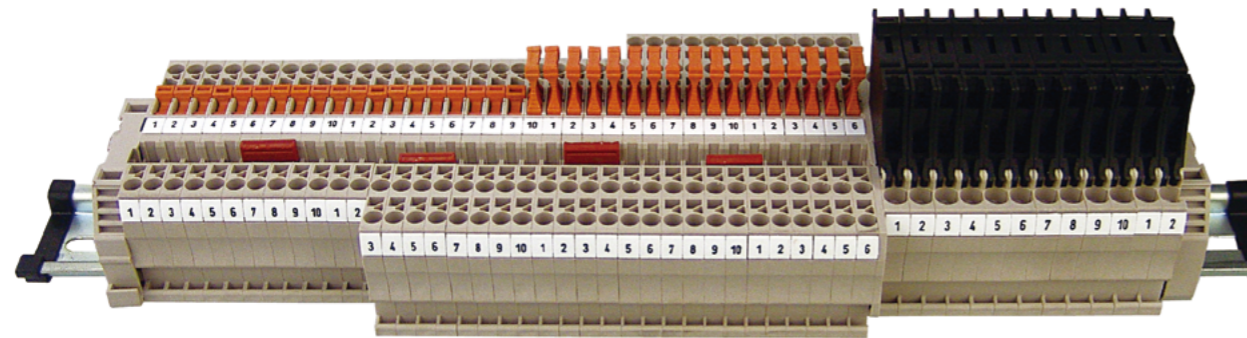

Disconnect Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.




High quality conducting material is used to provide low connection resistance, high conductivity.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

AK...CP

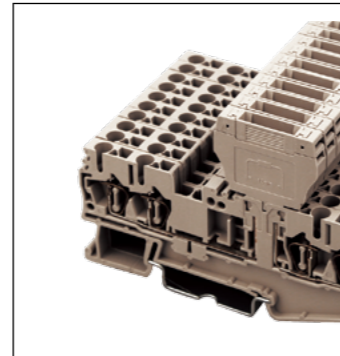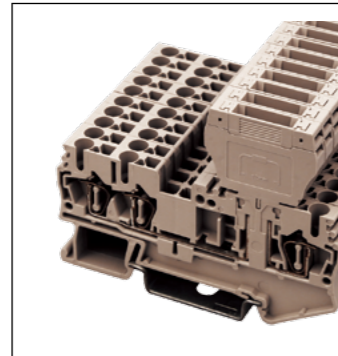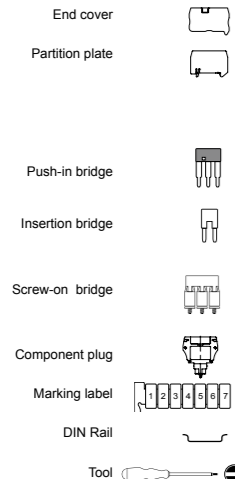

AK2.5-TN-CP

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6A	6A
SOL wire(AWG/mm ²)	28~12 / 0.2~4	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x56.2x72.6	
Package	100	

color	Part number	Package
•	AK2.5-TN-CP-RD	100
•	AK2.5-TN-CP-BL	100

Accessories	Part number	Package
	AK2.5C-TN	50

Accessories	Part number	Package
	DSD01-2.502N	50
	DSD01-2.503N	50
	DSD01-2.504N	50
	DSD01-2.505N	10
	DSD01-2.510N	10

Accessories	Part number	Package
	AKP-CP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

AK2.5-TR-CP

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6A	6A
SOL wire(AWG/mm ²)	28~12 / 0.2~4	
STR wire(AWG/mm ²)	28~12 / 0.2~2.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x56.2x84.4	
Package	100	

color	Part number	Package
•	AK4CP-RD	100
•	AK4CP-BL	100

Accessories	Part number	Package
	AK2.5C-TR-C	50

Accessories	Part number	Package
	DSD01-402N	50
	DSD01-403N	50
	DSD01-404N	50
	DSD01-405N	10
	DSD01-410N	10

Accessories	Part number	Package
	AKP-CP	50
	TM20 / TM36	10
	TS-35N	20
	0.6x3.5mm	/

AK4-TR-CP

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		


color	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

Fuse Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.



High quality conducting material is used to provide low connection resistance, high conductivity.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

AK...TF

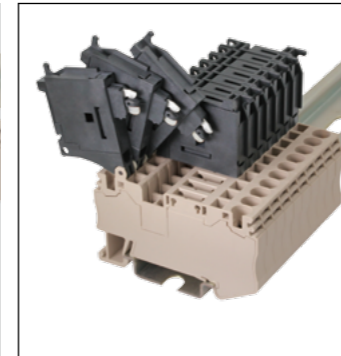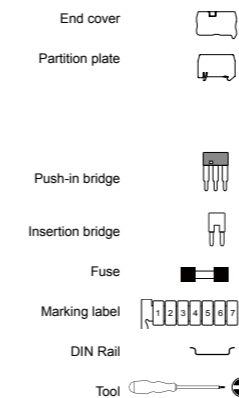

AK4-TF(5X20)

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	
Rated Current	11A	
SOL wire(AWG/mm ²)	28~10 / 0.2~6	
STR wire(AWG/mm ²)	28~10 / 0.2~4	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x63.1x61.8	
Package	100	

color	Part number	Package

Accessories	Part number	Package
	AKSPS-003	50

Accessories	Part number	Package
2 way	DSD01-402N	50
3 way	DSD01-403N	50
4 way	DSD01-404N	50
5 way	DSD01-405N	10
10 way	DSD01-410N	10

Accessories	Part number	Package
	FUK6.3A-01	50
	TM21	10
	TS-35N	20
	0.6x3.5mm	/

AK4-TR-CP

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

AK4-TF

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		



color	Part number	Package

Accessories	Part number	Package



Accessories	Part number	Package

Accessories	Part number	Package



Diode Terminal Blocks

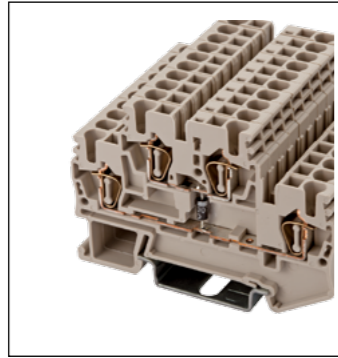


AKK2.5-D01

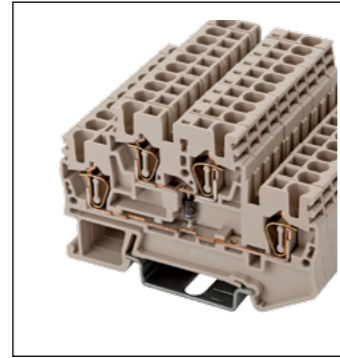


AKK2.5-D02

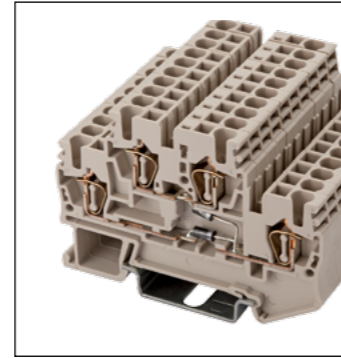


AKK2.5-D03



Diode Terminal Blocks

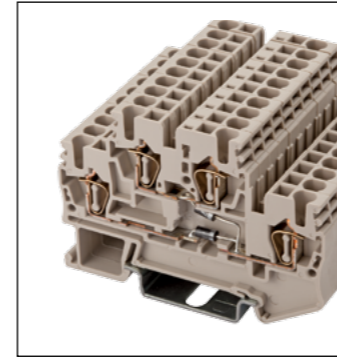

AKK2.5-D04




Diode component is installed to regulate the direction of current and to provide protection from the reverse voltage.

The direction of the diode can be changed to meet customers' requirement.

Accessories are complete, easy for identification and bridging applications.


AKK2.5 with diodes



Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage / Normal Voltage	300V	250V	Rated Voltage / Normal Voltage	250V	250V	Rated Voltage / Normal Voltage	250V	250V
Rated Current / Current intensity	0.5A	0.5A	Rated Current / Current intensity	0.5A	0.5A	Rated Current / Current intensity	0.5A	0.5A
Voltage Reversal	1000V	1000V	Voltage Reversal	1000V	1000V	Voltage Reversal	1000V	1000V
SOL wire (AWG/mm ²)	30~12 / 0.2~2.5		SOL wire (AWG/mm ²)	30~12 / 0.2~2.5		SOL wire (AWG/mm ²)	30~12 / 0.2~2.5	
STR wire (AWG/mm ²)	30~12 / 0.2~2.5		STR wire (AWG/mm ²)	30~12 / 0.2~2.5		STR wire (AWG/mm ²)	30~12 / 0.2~2.5	
Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV	
Torque(N-m)			Torque(N-m)			Torque(N-m)		
Screws			Screws			Screws		
Stripping length	10mm		Stripping length	10mm		Stripping length	10mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	5.1x46x68		TxHxW(mm)	5.1x46x68		TxHxW(mm)	5.1x46x68	
Package	100		Package	100		Package	100	
Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
	AKK2.5C	50		AKK2.5C	50		AKK2.5C	50
2 way	DSD01-2.502N	50	DSD01-2.502N	50	DSD01-2.502N	50	DSD01-2.502N	50
3 way	DSD01-2.503N	50	DSD01-2.503N	50	DSD01-2.503N	50	DSD01-2.503N	50
4 way	DSD01-2.504N	50	DSD01-2.504N	50	DSD01-2.504N	50	DSD01-2.504N	50
5 way	DSD01-2.505N	10	DSD01-2.505N	10	DSD01-2.505N	10	DSD01-2.505N	10
10 way	DSD01-2.510N	10	DSD01-2.510N	10	DSD01-2.510N	10	DSD01-2.510N	10
	TM20	10	TM20	10	TM20	10	TM20	10
	TS-35N	20	TS-35N	20	TS-35N	20	TS-35N	20
	0.6x3.5mm	/	0.6x3.5mm	/	0.6x3.5mm	/	0.6x3.5mm	/

Safety certification			Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage / Normal Voltage	250V	250V									
Rated Current / Current intensity	0.5A	0.5A									
Voltage Reversal	1000V	1000V									
SOL wire (AWG/mm ²)	30~12 / 0.2~2.5										
STR wire (AWG/mm ²)	30~12 / 0.2~2.5										
Rated impulse voltage	8KV										
Torque(N-m)											
Screws											
Stripping length	10mm										
Insulation materials	PA										
TxHxW(mm)	5.1x46x68										
Package	100										
Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
	AKK2.5C	50									
	DSD01-2.502N	50									
	DSD01-2.503N	50									
	DSD01-2.504N	50									
	DSD01-2.505N	10									
	DSD01-2.510N	10									
	TM20	10									
	TS-35N	20									
	0.6x3.5mm	/									

Feed-Through Screw Connection Terminal Blocks

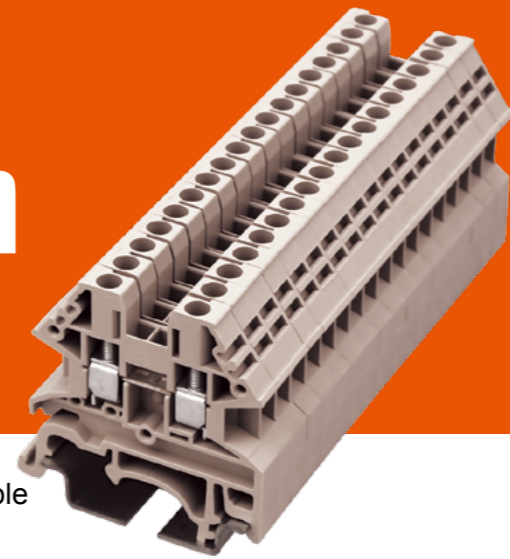

- Potential power distribution can be arranged using various pluggable insertion bridge and screw-on bridge.
- IEC 60947-7-1 & UL 1059 compliance.

New wire cage design for large wiring contact surface, vibration proof and high reliability.

Power distribution can be adjusted using top and side insertion bridge.


Suitable for wire sizes from 2.5 mm² to 35mm².

Accessories are complete, easy for identification and bridging applications.

Terminal blocks compliant with IEC 60947-7-1 & UL 1059.

DK..N


End cover		DK4NC	50
Partition plate		DKNSPS-005	50
Partition plate		DKNSPS-001	50
Push-in bridge		2 way DSS2.5N-02P	50
		3 way DSS2.5N-03P	50
		4 way DSS2.5N-04P	50
		5 way DSS2.5N-05P	10
		10 way DSS2.5N-10P	10
Insertion bridge		2 way CSC-2.502PN	50
		3 way CSC-2.503PN	50
		4 way CSC-2.504PN	50
		5 way CSC-2.505PN	10
		10 way CSC-2.510PN	10
Screw-on bridge			
Safety cover		DK2.5N-KP	50
Marking label		TM26	10
DIN Rail		TS-35N / TS-32	20
Tool		0.6x3.5mm	/

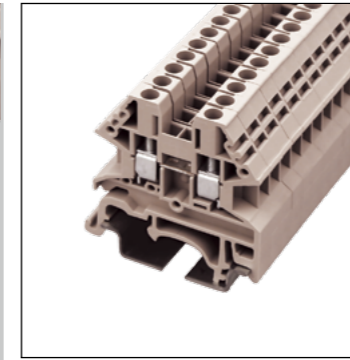

DK2.5N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~2.5	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	8KV	
Torque(N-m)	0.4	0.4
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x39.6x40.5	
Package	100	

color	Part number	Package
•	DK2.5N-RD	100
•	DK2.5N-BL	100


Accessories	Part number	Package
	DK4NC	50
	DKNSPS-005	50
	DKNSPS-001	50
	DSS4N-02P	50
	DSS4N-03P	50
	DSS4N-04P	50
	DSS4N-05P	10
	DSS4N-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

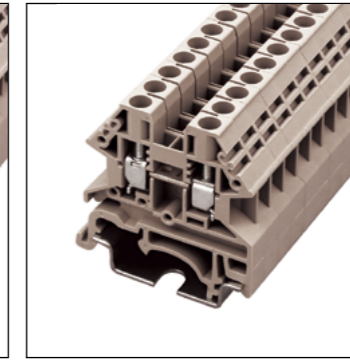

DK4N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.34~4	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.6	0.5
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x39.6x40.35	
Package	100	

color	Part number	Package
•	DK4N-RD	100
•	DK4N-BL	100


Accessories	Part number	Package
	DK4NC	50
	DKNSPS-005	50
	DKNSPS-001	50
	DSS6N-02P	50
	DSS6N-03P	50
	DSS6N-04P	50
	DSS6N-05P	10
	DSS6N-10P	10
	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10

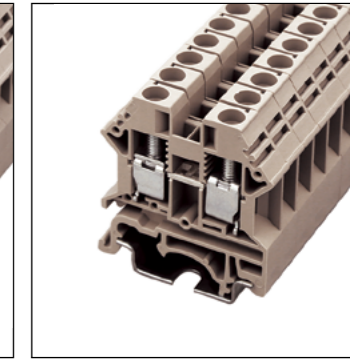





DK6N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	50A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)	1.2	1.2
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	8x45x41.75	
Package	100	

color	Part number	Package
•	DK6N-RD	100
•	DK6N-BL	100

Accessories	Part number	Package
	DK6NC	50
	DKNSPS-002	50
	DSS6N-02P	50
	DSS6N-03P	50
	DSS6N-04P	50
	DSS6N-05P	10
	DSS6N-10P	10
	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10

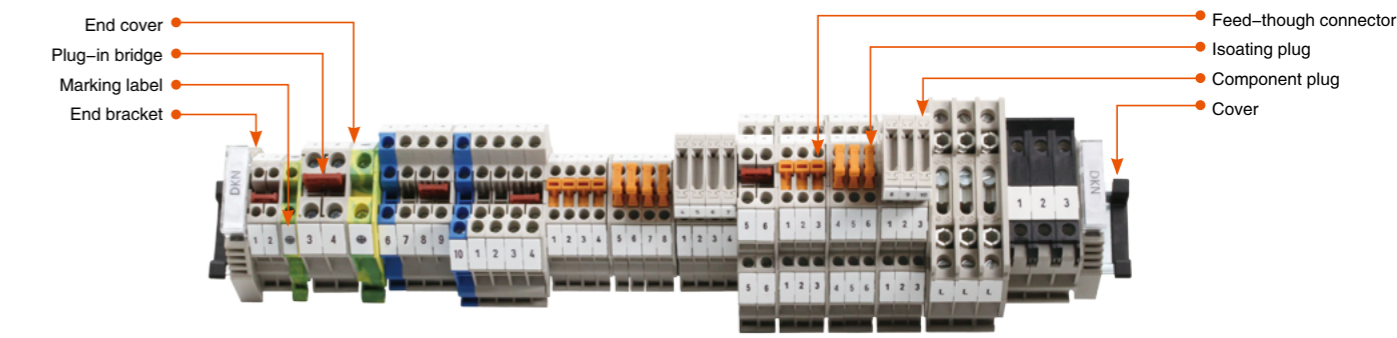

Feed-Through Screw Connection Terminal Blocks

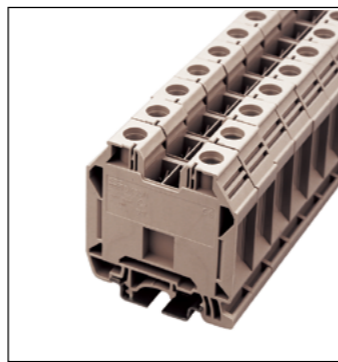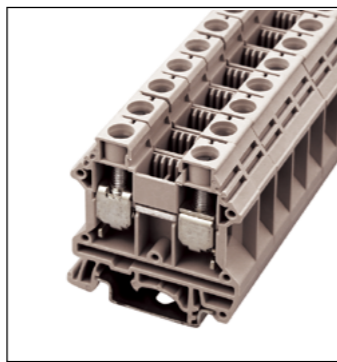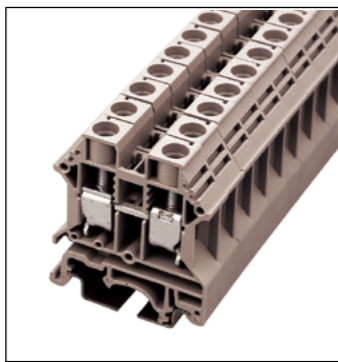

New wire cage design for large wiring contact surface, vibration proof and high reliability.


Power distribution can be adjusted using top and side insertion bridge.

Suitable for wire sizes from 2.5 mm² to 35mm².

Accessories are complete, easy for identification and bridging applications.

Terminal blocks compliant with IEC 60947-7-1 & UL 1059.

DK..N

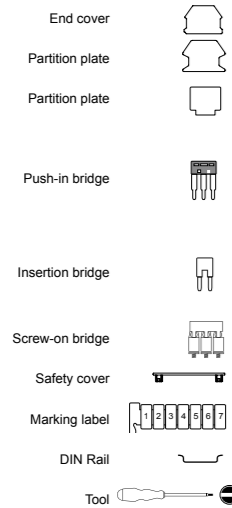

DK10N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	60A	57A
SOL wire(AWG/mm ²)	20-6 / 0.5-10	
STR wire(AWG/mm ²)	20-6 / 0.5-10	
Rated impulse voltage	8KV	
Torque(N-m)	1.3	1.2
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	10x49.3x42.9	
Package	50	

color	Part number	Package
•	DK10N-RD	100
•	DK10N-BL	100

Accessories	Part number	Package
	DK10NC	50
	DKNSPS-002	50
	DSS10N-02P	10
	DSS10N-03P	10
	DSS10N-04P	10
	DSS10N-05P	10
	DSS10N-10P	10
	CSC-1002PN	10
	CSC-1003PN	10
	CSC-1004PN	10
	CSC-1005PN	10
	CSC-1010PN	10
	DK10N-KP	50
	TM28	10
	TS-35N / TS-32	20
	0.8x4mm	/

DK16N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	88A	76A
SOL wire(AWG/mm ²)	14-3 / 1.5-16	
STR wire(AWG/mm ²)	14-3 / 1.5-16	
Rated impulse voltage	8KV	
Torque(N-m) *	3.4	2
Screws	M35	
Stripping length	14~16mm	
Insulation materials	PA	
TxHxW(mm)	12x51.3x48.3	
Package	50	

color	Part number	Package
•	DK16N-RD	100
•	DK16N-BL	100

Accessories	Part number	Package
	DK16NC	50
	DKNSPS-004	50
	DSS16N-02PN	10
	CSC-1002P	10
	CSC-1003P	10
	CSC-1004P	10
	CSC-1005P	10
	CSC-1010P	10
	TM28	10
	TS-35N / TS-32	20
	1.0x5.5mm	/





DK35N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	150A	125A
SOL wire(AWG/mm ²)	12-1/10 / 1.5-35	
STR wire(AWG/mm ²)	12-1/10 / 1.5-35	
Rated impulse voltage	8KV	
Torque(N-m)	3.5	6.9
Screws	M6	
Stripping length	14~16mm	
Insulation materials	PA	
TxHxW(mm)	16x60.3x55.4	
Package	50	

color	Part number	Package
•	DK35N-RD	100
•	DK35N-BL	100

Accessories	Part number	Package
	DK35NC	50
	DKNSPS-004	50
	DSS35N-02PN	10
	CSC-3502P	10
	CSC-3503P	10
	CSC-3504P	10
	CSC-3505P	10
	CSC-3510P	10
	TM28	10
	TS-35N / TS-32	20
	1.0x5.5mm	/

- *
 ■ WITHOUT JUMPER 600V/100A AT TORQUE VALUE 2.5~3.4NM
 ■ WITH JUMPER DSS16N : 600V/92A AT TORQUE VALUE 2.5NM : 600V/100A AT TORQUE VALUE 3.4NM
 ■ WITH JUMPER CSC-16 : 600V/88A AT TORQUE VALUE 2.5NM : 600V/100A AT TORQUE VALUE 3.4NM

Feed-Through Screw Connection Terminal Blocks

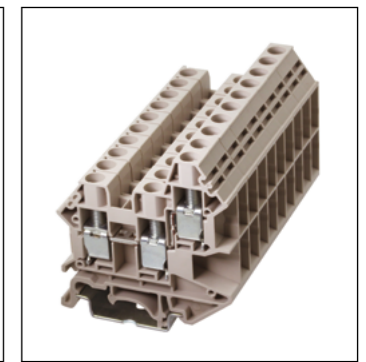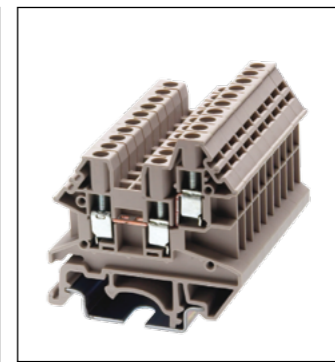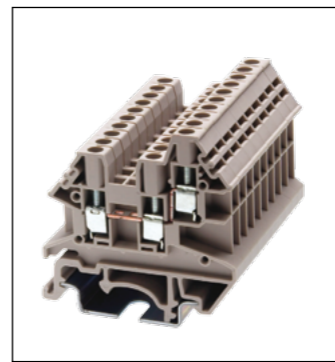


Three connections, compact design, space saving.

Solid structure and high reliability designed to meet the vibration and harsh thermal variation requirement.

Accessories are complete, easy for identification, partition and bridging applications.

Compliant with IEC 60947-7-1 & UL 1059.

DK..N-TN

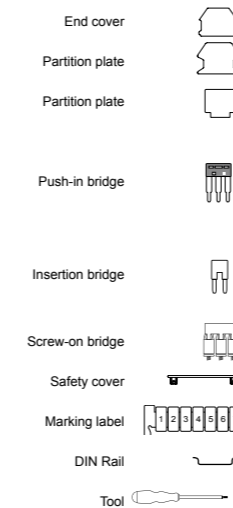

DK2.5N-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22-12 / 0.14-4	
STR wire(AWG/mm ²)	22-12 / 0.14-2.5	
Rated impulse voltage	8KV	
Torque(N-m) *	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x48.5x48.7	
Package	100	

color	Part number	Package
•	DK2.5N-TN-RD	100
•	DK2.5N-TN-BL	100

Accessories	Part number	Package
	DK2.5NC-TN	50
	DKNSPS-001	50
	DSS2.5N-02P	50
	DSS2.5N-03P	50
	DSS2.5N-04P	50
	DSS2.5N-05P	10
	DSS2.5N-10P	10
	CSC-2.502PN	50
	CSC-2.503PN	50
	CSC-2.504PN	50
	CSC-2.505PN	10
	CSC-2.510PN	10
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

DK4N-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22-10 / 0.14-6	
STR wire(AWG/mm ²)	22-10 / 0.14-4	
Rated impulse voltage	8KV	
Torque(N-m) *	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x48.5x48.7	
Package	100	


color	Part number	Package
•	DK4N-TN-RD	100
•	DK4N-TN-BL	100

Accessories	Part number	Package
	DK4NC-TN	50
	DKNSPS-001	50
	DSS4N-02P	50
	DSS4N-03P	50
	DSS4N-04P	50
	DSS4N-05P	10
	DSS4N-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10
	DK4N-TN-KP	10
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/





DK6N-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	50A	41A
SOL wire(AWG/mm ²)	20-8 / 0.5-6	
STR wire(AWG/mm ²)	20-8 / 0.5-6	
Rated impulse voltage	8KV	
Torque(N-m) *	1.2	
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	8x58.05x55.2	
Package	100	

color	Part number	Package
•	DK6N-TN-RD	100
•	DK6N-TN-BL	100

Accessories	Part number	Package
	DK6NC-TN	50
	DKNSPS-0021	50
	DSS6N-02P	50
	DSS6N-03P	50
	DSS6N-04P	50
	DSS6N-05P	10
	DSS6N-10P	10
	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
	TM28	10
	TS-35N / TS-32	20
	0.8x4mm	/

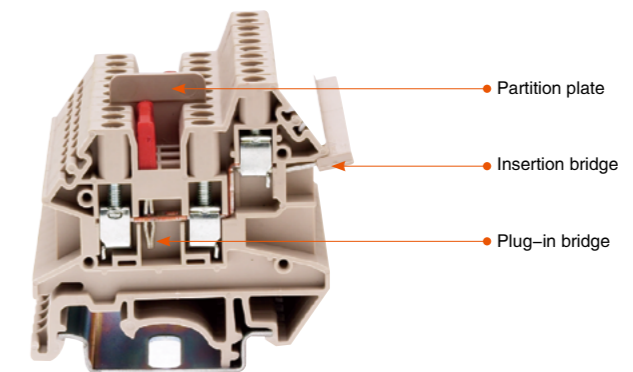

Feed-Through Screw Connection Terminal Blocks

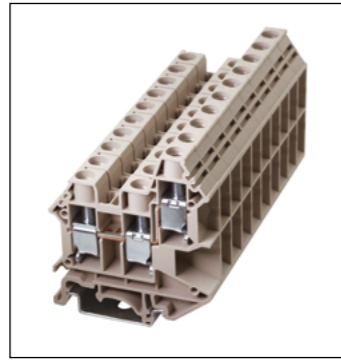

Three connections, compact design, space saving.

Solid structure and high reliability designed to meet the vibration and harsh thermal variation requirement.

Accessories are complete, easy for identification, partition and bridging applications.


Compliant with IEC 60947-7-1 & UL 1059.

DK..N-TN





DK10N-TN		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	60A	57A
SOL wire(AWG/mm ²)	20~6 / 0.5~10	
STR wire(AWG/mm ²)	20~6 / 0.5~10	
Rated impulse voltage	8KV	
Torque(N-m)	1.3	
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	10x62.65x55.6	
Package	50	

color	Part number	Package
•	DK10N-TN-RD	100
•	DK10N-TN-BL	100

Accessories	Part number	Package
	DK10NC-TN	50
	DKNSPS-001	50
2 way	DSS10N-02P	10
3 way	DSS10N-03P	10
4 way	DSS10N-04P	10
5 way	DSS10N-05P	10
10 way	DSS10N-10P	10
2 way	CSC-1002PN	10
3 way	CSC-1003PN	10
4 way	CSC-1004PN	10
5 way	CSC-1005PN	10
10 way	CSC-1010PN	10
	DK10N-TN-KP	10
	TM28	10
	TS-35N / TS-32	20
	0.8x4mm	/

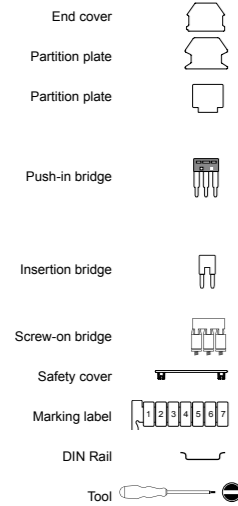

Feed-Through Screw Connection Terminal Blocks

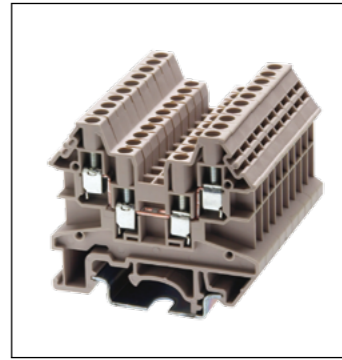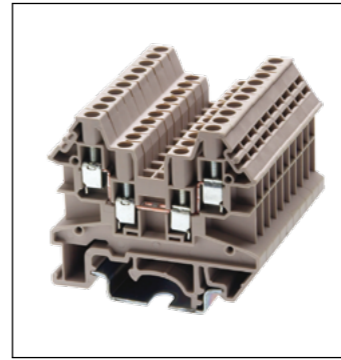

Three connections, compact design, space saving.

Solid structure and high reliability designed to meet the vibration and harsh thermal variation requirement.

Accessories are complete, easy for identification, partition and bridging applications.


Compliant with IEC 60947-7-1 & UL 1059.

DK..N-TR

DK2.5N-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.14~4	
STR wire(AWG/mm ²)	22~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x47.9x54.8	
Package	100	

color	Part number	Package
•	DK2.5N-TR-RD	100
•	DK2.5N-TR-BL	100


Accessories	Part number	Package
	DK2.5NC-TR	50
	DKNSPS-001	50
2 way	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10
2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10
	DK10N-TN-KP	10
	TM28	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

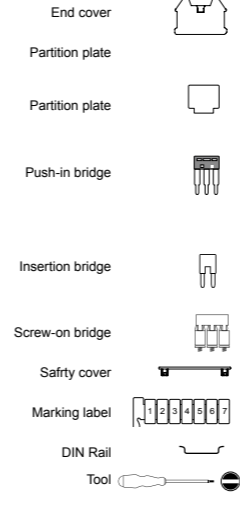

DK4N-TR		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.14~6	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x48.5x54.8	
Package	100	




color	Part number	Package
•	DP2.5-RD	100
•	DP2.5-BL	100

Accessories	Part number	Package
	DP2.5C	50
	AKSPS-001	50
	DKNSPS-001	50
	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10
	DK4N-TR-KP	10
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

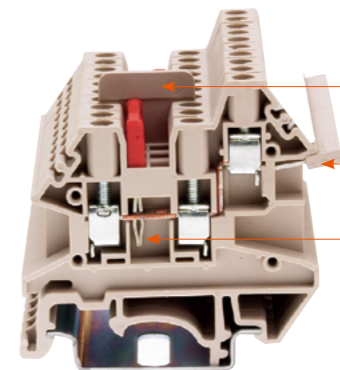

- Partition plate
- Insertion bridge
- Plug-in bridge

Bi-Level Screw Connection Terminal Blocks




DKK2.5N and DKK4N share similar design and structure.

Diode can be installed as an option to regulate conduction direction.

Using the same bridging structure as other DKN series products, which power distribution can be adjusted using a variety of bridges.

Accessories are complete easy for identification, partition and bridging applications.

DKK..N




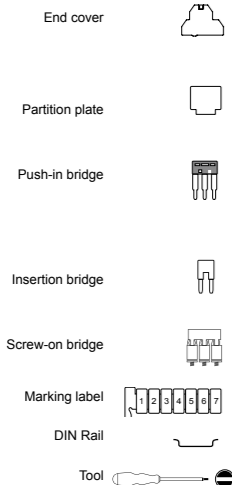


DKK2.5N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	8KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62x71	
Package	100	
color	Part number	Package
•	DKK2.5N-RD	100
•	DKK2.5N-BL	100
Accessories	Part number	Package
	DKK2.5NC	50
	DKNSPS-001	50
2 way	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10
2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

DKK4N		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	8KV	
Torque(N·m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x62x71	
Package	100	
color	Part number	Package
•	DKK4N-RD	100
•	DKK4N-BL	100
Accessories	Part number	Package
	DKK2.5NC	50
	DKNSPS-001	50
	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

Safety certification		
Specification	UL	IEC
color	Part number	Package
Accessories	Part number	Package

Bi-Level Screw Connection Terminal Blocks




Diode can be installed as an option to regulate conduction direction.

Using the same bridging structure as other DKN series products, which power distribution can be adjusted using a variety of bridges.

Accessories are complete easy for identification, partition and bridging applications.

DKK..N-PV

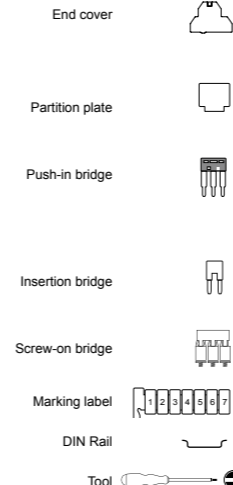


DKK2.5N-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	400V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	8KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62x71.5	
Package	100	
color	Part number	Package
•	DKK2.5N-PV-RD	100
•	DKK2.5N-PV-BL	100
Accessories	Part number	Package
	DKK2.5NC	50
	DKNSPS-001	50
2 way	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10
2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

DKK4N-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	8KV	
Torque(N·m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x62x71.5	
Package	100	
color	Part number	Package
•	DKK4N-PV-RD	100
•	DKK4N-PV-BL	100
Accessories	Part number	Package
	DKK2.5NC	50
	DKNSPS-001	50
	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

DP4		
Safety certification		
Specification	UL	IEC
color	Part number	Package
Accessories	Part number	Package

Screw Connection Grounding Terminal Blocks





Hardened steel wire cage to ensure secure wiring.

High conductivity and low resistance conduction material for safe grounding.

Easy installation, product can be simply snapping onto the DIN rail.


Compliant with IEC 60947-7-2 & UL 1059.

DK..N-PE

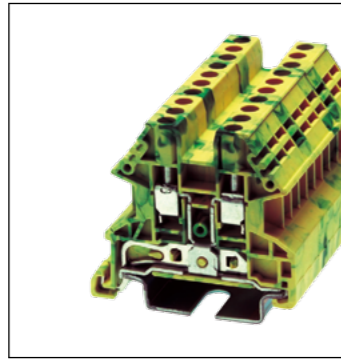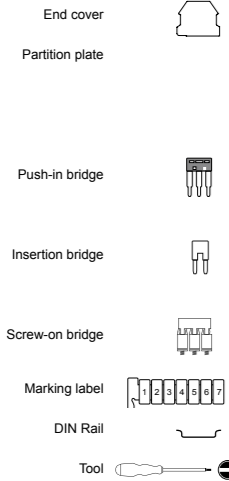


DK2.5N-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	28~12 / 0.14~4	
STR wire(AWG/mm ²)	28~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x40.95x45.4	
Package	100	
color	Part number	Package

Accessories	Part number	Package
End cover	DK2.5NC-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM26	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

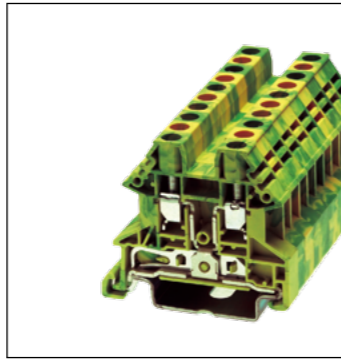

DK4N-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	28~10 / 0.14~6	
STR wire(AWG/mm ²)	28~10 / 0.14~4	
Rated impulse voltage	8KV	
Torque(N·m)	0.6	
Screws	M3	
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	6.1x40.95x45.4	
Package	100	
color	Part number	Package


Accessories	Part number	Package
End cover	DK2.5NC-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM27	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

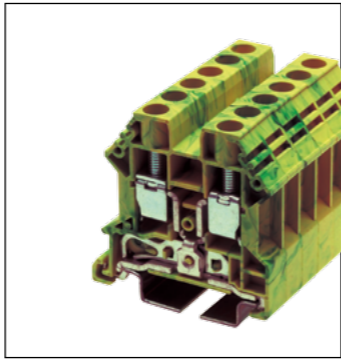

DK6N-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	20~86 / 0.2~10	
STR wire(AWG/mm ²)	20~86 / 0.2~6	
Rated impulse voltage	8KV	
Torque(N·m)	1.2	
Screws	M4	
Stripping length	11~13mm	
Insulation materials	PA	
TxHxW(mm)	8x45.7x46.4	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DK6NC-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

Screw Connection Grounding Terminal Blocks





Hardened steel wire cage to ensure secure wiring.

High conductivity and low resistance conduction material for safe grounding.

Easy installation, product can be simply snapping onto the DIN rail.


Compliant with IEC 60947-7-2 & UL 1059.

DK..N-PE

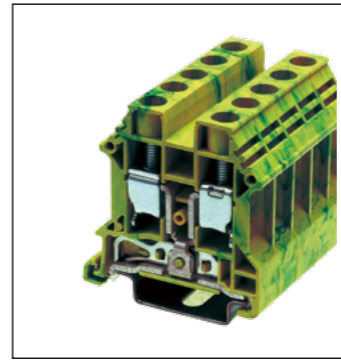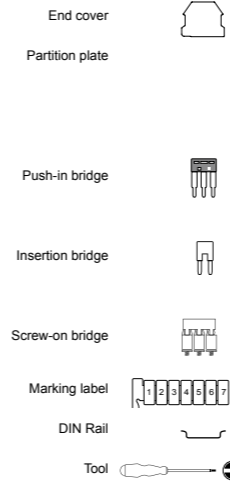


DK10N-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	20~6 / 0.5~16	
STR wire(AWG/mm ²)	20~6 / 0.5~16	
Rated impulse voltage	8KV	
Torque(N·m)	2.5	4
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	10x48.75x47.15	
Package	50	
color	Part number	Package

Accessories	Part number	Package
End cover	DK10NC-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N	20
Tool	0.8x4mm	/

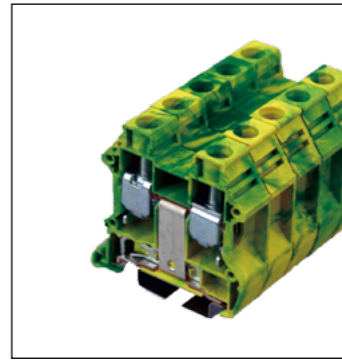

DK16N-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	14~3 / 1.5~25	
STR wire(AWG/mm ²)	14~3 / 1.5~16	
Rated impulse voltage	8KV	
Torque(N·m)	2.5	
Screws	M5	
Stripping length	14~16mm	
Insulation materials	PA	
TxHxW(mm)	12x51x52	
Package	50	
color	Part number	Package


Accessories	Part number	Package
End cover	DK16NC-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N	20
Tool	1.0x5.5mm	/

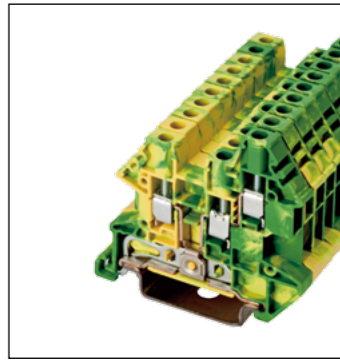

DK2.5N-TN-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	22~12 / 0.14~4	
STR wire(AWG/mm ²)	22~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x52.3x48.3	
Package	100	
color	Part number	Package

Accessories	Part number	Package
End cover	DK2.5NC-TN-PE	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM26	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

Screw Connection Grounding Terminal Blocks




Hardened steel wire cage to ensure secure wiring.

High conductivity and low resistance conduction material for safe grounding.


Easy installation, product can be simply snapping onto the DIN rail.

Compliant with IEC 60947-7-2 & UL 1059.


DK..N-PE

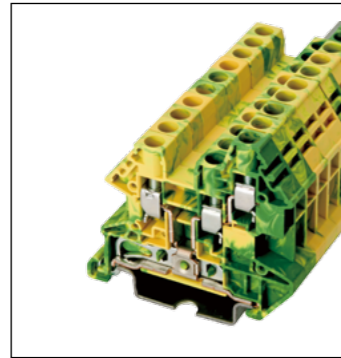

DK4N-TN-PE		
Safety certification	D'E	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	22~10 / 0.14~6	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x52.3x48.3	
Package	100	
color	Part number	Package

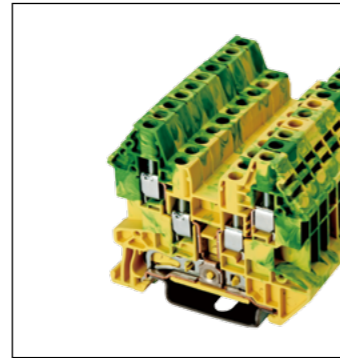

DK2.5N-TR-PE		
Safety certification	D'E	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	22~12 / 0.14~4	
STR wire(AWG/mm ²)	22~12 / 0.14~2.5	
Rated impulse voltage	8KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x55.1x48.4	
Package	100	
color	Part number	Package

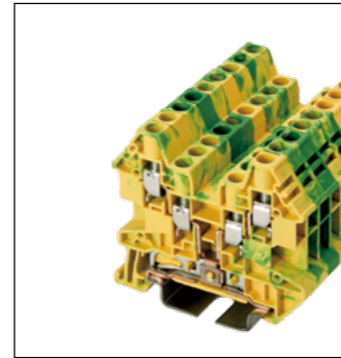


DK4N-TR-PE		
Safety certification	D'E	
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	22~10 / 0.14~6	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x55.1x48.4	
Package	100	
color	Part number	Package

Accessories	Part number	Package
End cover	DK2.5NC-TN-PE	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM27	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Accessories	Part number	Package
End cover	DK2.5NC-TR-PE	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM26	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Accessories	Part number	Package
End cover	DK2.5NC-TR-PE	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM27	10
DIN Rail	TS-35N	20
Tool	0.6x3.5mm	/

Disconnect Terminal Blocks




The knife shaped isolating plug is easy to use for disconnection purpose.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor.etc.

Accessories range are complete, easy for identification, partition and bridging applications.


DK..N-TP

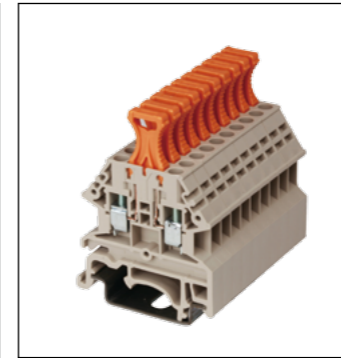

DK2.5N-TP		
Safety certification	D'E	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20V	24V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	0.4
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x53.6x40.7	
Package	100	
color	Part number	Package

•	DKK2.5N-TP-RD	100
•	DKK2.5N-TP-BL	100

Accessories	Part number	Package
End cover	DK4NC	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Isolating plug	AKP-TP	50
Marking label	TM26	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

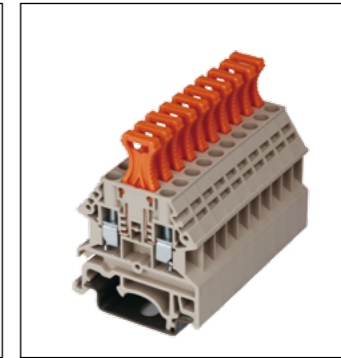

DK4N-TP		
Safety certification	D'E	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	30V	32V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	0.6
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x53.6x40.7	
Package	100	
color	Part number	Package

•	DK4N-TP-RD	100
•	DK4N-TP-BL	100


Accessories	Part number	Package
End cover	DK4NC	50
Partition plate		
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Isolating plug	AKP-TP	50
Marking label	TM27	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

2 way	CSC-2.502PN	50	CSC-402PN	50
3 way	CSC-2.503PN	50	CSC-403PN	50
4 way	CSC-2.504PN	50	CSC-404PN	50
5 way	CSC-2.505PN	10	CSC-405PN	10
10 way	CSC-2.510PN	10	CSC-410PN	10

			CSC-402PN	50
			CSC-403PN	50
			CSC-404PN	50
			CSC-405PN	10
			CSC-410PN	10

			AKP-TP	50
			TM26	10
			TS-35N / TS-32	20
			0.6x3.5mm	/

			AKP-TP	50
			TM27	10
			TS-35N / TS-32	20
			0.6x3.5mm	/












The knife shaped isolating plug is easy to use for disconnection purpose.


Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor.etc.

Accessories range are complete, easy for identification, partition and bridging applications.

DKK..N-TP

- End cover 
- Partition plate 
- Push-in bridge 
- Insertion bridge 
- Screw-on bridge 
- Isolating plug 
- Marking label 
- DIN Rail 
- Tool 

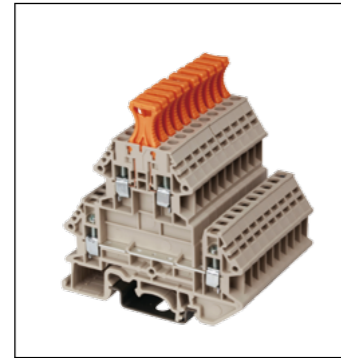

DKK2.5N-TP		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20V	24V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x76.1x71	
Package	50	


color	Part number	Package
●	DKK2.5N-TP-RD	50
●	DKK2.5N-TP-BL	50

Accessories	Part number	Package
	DKK2.5NC	50

2 way	Part number	Package
	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10

2 way	Part number	Package
	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10

	AKP-TP	50
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

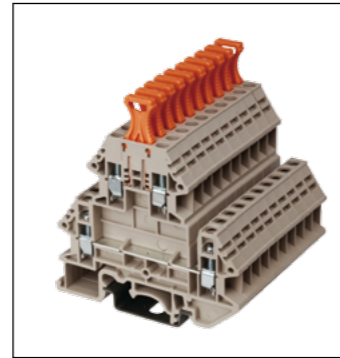

DKK4N-TP		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	30V	32V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N·m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x76.1x71	
Package	50	

color	Part number	Package
●	DKK4N-TP-RD	50
●	DKK4N-TP-BL	50

Accessories	Part number	Package
	DKK2.5NC	50

2 way	Part number	Package
	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10

2 way	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	AKP-TP	50
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/



Safety certification		
Specification	UL	IEC


color	Part number	Package

Accessories	Part number	Package

2 way	Part number	Package
	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10

2 way	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	AKP-TP	50
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/












The knife shaped isolating plug is easy to use for disconnection purpose.


Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor.etc.

Accessories are complete, easy for identification, partition and bridging applications.

DK..N-TG

- End cover 
- Partition plate 
- Push-in bridge 
- Insertion bridge 
- Screw-on bridge 
- Feed-through connector 
- Marking label 
- DIN Rail 
- Tool 

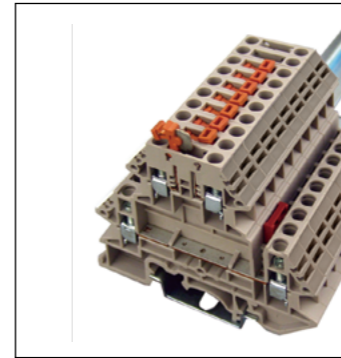

DK2.5N-TG		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20V	24V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x42.6x40.7	
Package	100	


color	Part number	Package
●	DK2.5N-TG-RD	100
●	DK2.5N-TG-BL	100

Accessories	Part number	Package
	DK4NC	50

2 way	Part number	Package
	CSC-2.502PN	50
	CSC-2.503PN	50
	CSC-2.504PN	50
	CSC-2.505PN	10
	CSC-2.510PN	10

2 way	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	AKP-TG	50
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

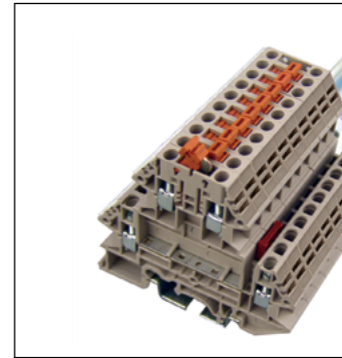

DK4N-TG		
Safety certification	DVE	
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	30V	32V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N·m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x42.6x40.7	
Package	100	

color	Part number	Package
●	DK4N-TG-RD	100
●	DK4N-TG-BL	100


Accessories	Part number	Package
	DK4NC	50

2 way	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

2 way	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	AKP-TG	50
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

Disconnect Terminal Blocks

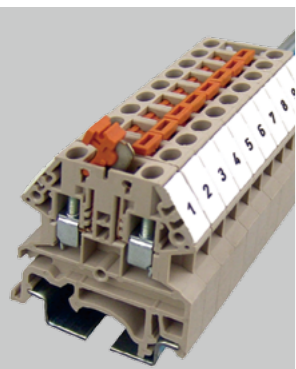


The knife shaped isolating plug is easy to use for disconnection purpose.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

DKK..N-TP



End cover




Partition plate




Push-in bridge




Insertion bridge



Screw-on bridge



Feed-through connector




Marking label



DIN Rail



Tool

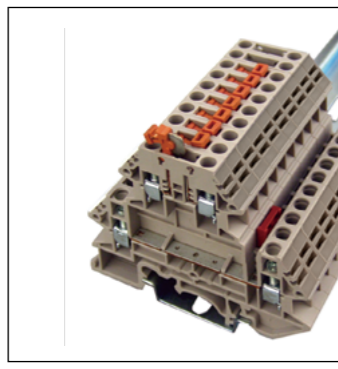

DKK2.5N-TG		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20V	21V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x63.9x71	
Package	50	

color	Part number	Package
●	DKK2.5N-TG-RD	100
●	DKK2.5N-TG-BL	100

Accessories	Part number	Package
	DKK2.5NC	50


2 way	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10
2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10

	AKP-TP	50
--	--------	----

	TM26	10
--	------	----

	TS-35N / TS-32	20
--	----------------	----

	0.6x3.5mm	/
--	-----------	---

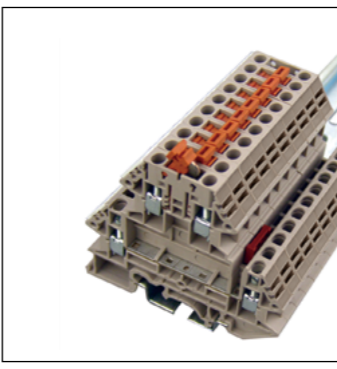

DKK4N-TG		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	30V	32V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x63.9x71	
Package	50	

color	Part number	Package
●	DK4N-TG-RD	100
●	DK4N-TG-BL	100

Accessories	Part number	Package
	DKK2.5NC	50

	DSS4-02P	50
	DSS4-03P	50
	DSS4-04P	50
	DSS4-05P	10
	DSS4-10P	10
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	AKP-TP	50
--	--------	----

	TM27	10
--	------	----

	TS-35N / TS-32	20
--	----------------	----

	0.6x3.5mm	/
--	-----------	---



DK2.5N-CP		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6V	6V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x60.7x40.7	
Package	100	

color	Part number	Package
●	DK2.5N-TG-RD	100
●	DK2.5N-TG-BL	100

Accessories	Part number	Package
	DK4NC	50

	CSC-2.502PN	50
	CSC-2.503PN	50
	CSC-2.504PN	50
	CSC-2.505PN	10
	CSC-2.510PN	10


	AKP-CP	50
--	--------	----

	TM26	10
--	------	----

	TS-35N / TS-32	20
--	----------------	----

	0.6x3.5mm	/
--	-----------	---

Disconnect Terminal Blocks

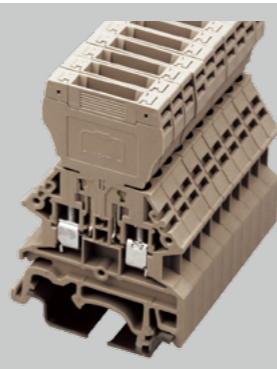


The plug-in zone of the disconnect terminal block is universal, a variety of plugs can be used such as the component plug, isolating plug and feed-through connector.


Suitable for wire sizes from 2.5 mm² to 4mm².

Accessories are complete, easy for identification, partition and bridging applications.


DK..N-CP



End cover




Partition plate



Push-in bridge




Insertion bridge



Screw-on bridge



Component plug




Marking label



DIN Rail



Tool

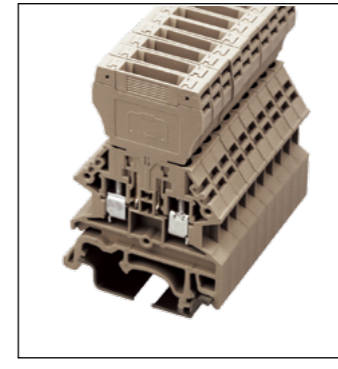

DK2.5N-CP		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6V	6V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x60.7x40.7	
Package	100	

color	Part number	Package
●	DK2.5N-TG-RD	100
●	DK2.5N-TG-BL	100

Accessories	Part number	Package
	DK4NC	50


	CSC-2.502PN	50
	CSC-2.503PN	50
	CSC-2.504PN	50
	CSC-2.505PN	10
	CSC-2.510PN	10

	AKP-CP	50
--	--------	----

	TM26	10
--	------	----

	TS-35N / TS-32	20
--	----------------	----

	0.6x3.5mm	/
--	-----------	---

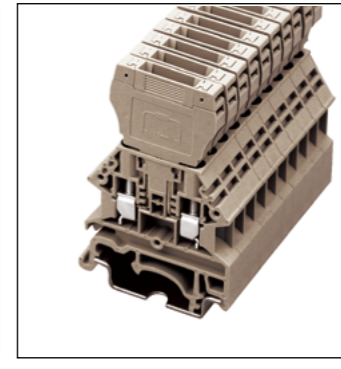

DK4N-CP		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6V	6V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x60.7x40.7	
Package	100	

color	Part number	Package
●	DK4N-TG-RD	100
●	DK4N-TG-BL	100

Accessories	Part number	Package
	DK4NC	50

	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10


	AKP-CP	50
--	--------	----

	TM27	10
--	------	----

	TS-35N / TS-32	20
--	----------------	----

	0.6x3.5mm	/
--	-----------	---

Disconnect Terminal Blocks




The plug-in zone of the disconnect terminal block is universal, a variety of plugs can be used such as the component plug, isolating plug and feed-through connector.

Suitable for wire sizes from 2.5 mm² to 4mm².

Accessories are complete, easy for identification, partition and bridging applications.

DKK..N-CP

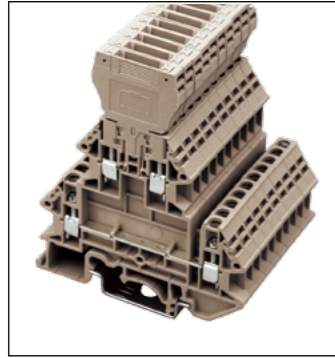

DKK2.5N-CP

Safety certification


Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6V	6V
SOL wire(AWG/mm ²)	22~12 / 0.34~4	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	5.1x83.2x71.5	
Package	50	

color	Part number	Package
•	DKK2.5N-CP-RD	100
•	DKK2.5N-CP-BL	100

Accessories	Part number	Package
	DKK2.5NC	50

Accessories	Part number	Package
2 way	DSS2.5N-02P	50
3 way	DSS2.5N-03P	50
4 way	DSS2.5N-04P	50
5 way	DSS2.5N-05P	10
10 way	DSS2.5N-10P	10
2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10

Accessories	Part number	Package
	AKP-CP	50
	TM26	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

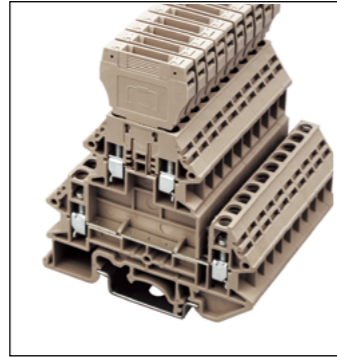

DKK4N-CP


Safety certification

Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	6V	6V
SOL wire(AWG/mm ²)	22~10 / 0.34~6	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x83.2x71.5	
Package	50	

color	Part number	Package
•	DKK4N-CP-RD	100
•	DKK4N-CP-BL	100

Accessories	Part number	Package
	DKK4NC	50

Accessories	Part number	Package
	AKP-CP	50
	TM27	10
	TS-35N / TS-32	20
	0.6x3.5mm	/



Safety certification


Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

Fuse Terminal Blocks



The knife shaped isolating plug is easy to use for disconnection purpose, and is excellent against vibration.


High quality conducting material is used to provide low connection resistance, high conductivity.

Suitable for wire sizes from 2.5 mm² to 4mm².

The disconnection isolating plug can be replaced for other functional components, such as feed-through connector, resistor, capacitor...etc.

Accessories are complete, easy for identification, partition and bridging applications.

DK..N-TF

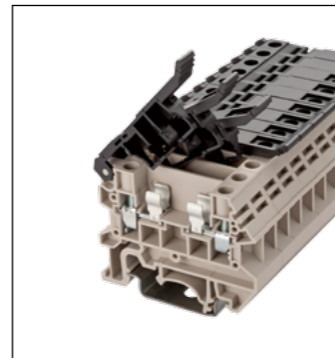

DK4N-TF(5X20)

Safety certification


Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	12A	12A
SOL wire(AWG/mm ²)	22~10 / 0.14~4	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.53	
Screws	M3	
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	8x42.7x53.3	
Package	50	

color	Part number	Package

Accessories	Part number	Package
	DK4NC-TF	50

Accessories	Part number	Package
2 way	CSC-602PN	50
3 way	CSC-603PN	50
4 way	CSC-604PN	50
5 way	CSC-605PN	10
10 way	CSC-610PN	10
	FUK6.3A-01	50
	TM28	10
	TS-35N / TS-32	20
	0.6x3.5mm	/

Accessories	Part number	Package

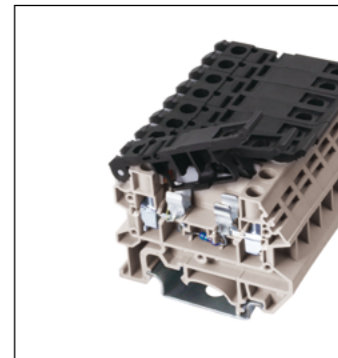

DK4NTFL(5X20)


Safety certification

Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	12A	12A
SOL wire(AWG/mm ²)	22~10 / 0.14~4	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.53	
Screws	M3	
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	8x42.7x53.3	
Package	50	

color	Part number	Package

Accessories	Part number	Package
	DK4NC-TF	50

Accessories	Part number	Package





Safety certification

Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package


Accessories	Part number	Package

Accessories	Part number	Package

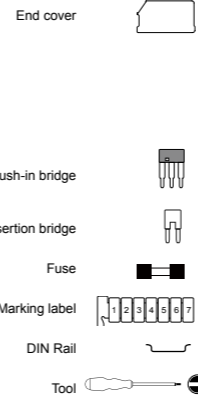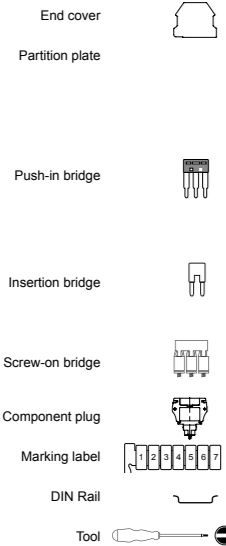

Part number	LED	Voltage
DK4N-TFL5(5X20)	with LED light	5V
DK4N-TFL12(5X20)	with LED light	12V
DK4N-TFL24(5X20)	with LED light	24V
DK4N-TFL48(5X20)	with LED light	48V
DK4N-TFL110(5X20)	with LED light	110V
DK4N-TFL220(5X20)	with LED light	220V
DK4N-TFL300(5X20)	with LED light	300V

Test Disconnect Terminal Blocks





The standard test disconnect terminal blocks is developed for in secondary sensorial current loop.

Fixed and switchable bridges are available for fitting between the terminal blocks for various setting.

An extensive range of accessories is offered for different types of testing connection requirement.

Easy and clear marking labels to prevent error.

DKT..N

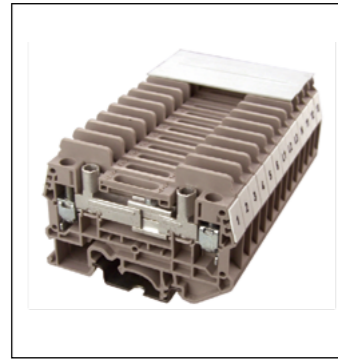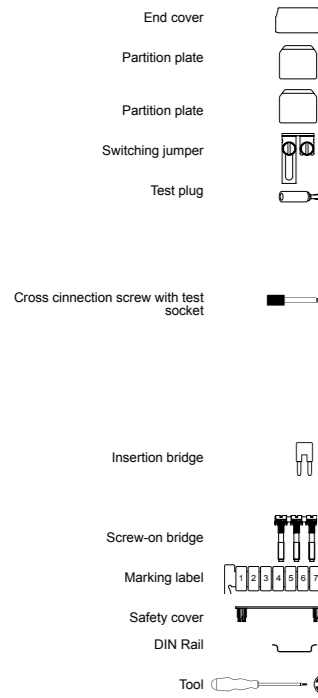

DKTD6N

Safety certification		
Specification	UL	IEC
Rated Voltage	300V	800V
Rated Current	42V	41V
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)	1.2	
Screws	M4	
Stripping length	9~10mm	
Insulation materials	PA	
TxHxW(mm)	8x72x49.7	
Package	50	

color	Part number	Package
•	DKTD6N-RD	50
•	DKTD6N-BL	50

Accessories	Part number	Package
	DKTD6NC	50
	DKNSPS-006	50
	DKNSPS-007	50
	SD6B01-02 / 03 / 04	50
Black	C002-0101-BK	50
Red	C002-0101-RD	50

Accessories	Part number	Package
Black	DS6S4	50
Orange	DS6S4-OR	50
Yellow	DS6S4-YW	50
Red	DS6S4-RD	50

	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
	DS6B02-02	50
	DS6B02-10	50


	TM28	10
--	------	----

	DKTD6N-KP / DKBC150-XXXX	50
--	--------------------------	----


	TS-35N / TS-32	20
--	----------------	----

	0.8x4mm	/
--	---------	---

	0.8x4mm	/
--	---------	---



Feed-Through Screw Connection Terminal Blocks



DK series can be installed onto the TS-32 & TS-35 DIN rail and is widely used in power industry.



Wire cage is specially designed for high reliability, vibration proof, and with large contacting area for wiring securesness.

Products are available for wire sizes from 2.5 mm² to 240mm².

The wire entry hole allows wire to be used with ferrules within the nominal cross section.

Compliant with IEC 60947-7-7 & UL 1059. Products are certified by CUL, UL and VDE.

DK

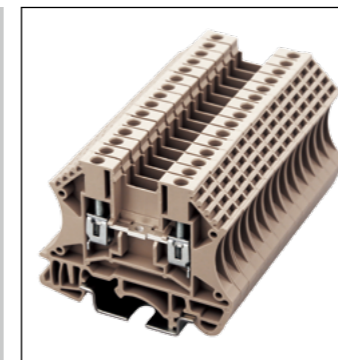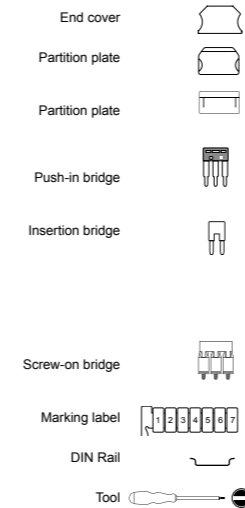

DK2.5

Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~2.5	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	8KV	
Torque(N-m)	0.79	0.5
Screws	M3	
Stripping length	10~12mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46.85x58.9	
Package	100	

color	Part number	Package
•	DK2.5-RD	100
•	DK2.5-BL	100

Accessories	Part number	Package
	DK2.5C	50
	DKSPS-002	50
	DKSPS-001	50

2 way	CSC-2.502PN	50
3 way	CSC-2.503PN	50
4 way	CSC-2.504PN	50
5 way	CSC-2.505PN	10
10 way	CSC-2.510PN	10
2 way	DS2.5N-02P	50
3 way	DS2.5N-03P	50
4 way	DS2.5N-04P	50
5 way	DS2.5N-05P	10
10 way	DS2.5N-10P	10
	TM26	10
	TS-35N / TS-32	20
	0.4x2.5mm	/

	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10
	DS4-02P	50
	DS4-03P	50
	DS4-04P	50
	DS4-05P	10
	DS4-10P	10
	TM27	10
	TS-35N / TS-32	20
	0.5x3mm	/

	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
	DS6-02P	50
	DS6-03P	50
	DS6-04P	50
	DS6-05P	10
	DS6-10P	10
	TM28	10
	TS-35N / TS-32	20
	0.8x4mm	/

	0.8x4mm	/
--	---------	---

	0.8x4mm	/
--	---------	---


	0.8x4mm	/
--	---------	---

	0.8x4mm	/
--	---------	---

	0.8x4mm	/
--	---------	---



Feed-Through Screw Connection Terminal Blocks



DK series can be installed onto the TS-32 & TS-35 DIN rail and is widely used in power industry.



Wire cage is specially designed for high reliability, vibration proof, and with large contacting area for wiring secureness.

Products are available for wire sizes from 2.5 mm² to 240mm².

The wire entry hole allows wire to be used with ferrules within the nominal cross section.

Compliant with IEC 60947-7-7 & UL 1059. Products are certified by CUL, UL and VDE.


DK

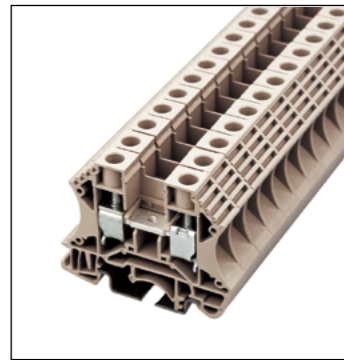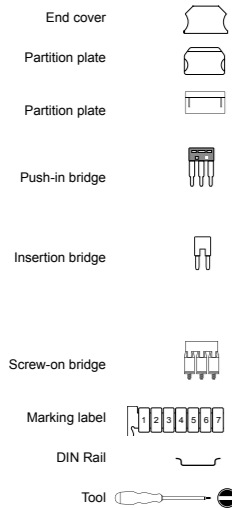

DK10		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	500V
Rated Current	60A	57A
SOL wire(AWG/mm ²)	20~6 / 0.5~10	
STR wire(AWG/mm ²)	20~6 / 0.5~10	
Rated impulse voltage	8KV	
Torque(N·m)	1.76	1.2
Screws	M4	
Stripping length	12~14mm	
Insulation materials	PA	
TxHxW(mm)	10x46.85x58.9	
Package	50	

color	Part number	Package
•	DK10-RD	50
•	DK10-BL	50


Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	0.8x4mm	/

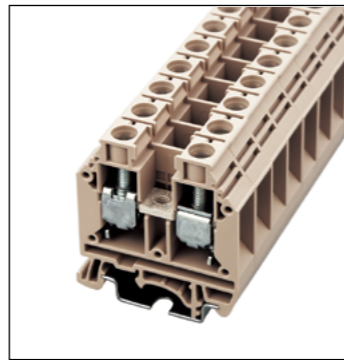

DK16H		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	100A	101A
SOL wire(AWG/mm ²)	14~3 / 1.5~25	
STR wire(AWG/mm ²)	14~3 / 1.5~25	
Rated impulse voltage	8KV	
Torque(N·m) *	3.4	2
Screws	M5	
Stripping length	13~15mm	
Insulation materials	PA	
TxHxW(mm)	12x51.3x46.7	
Package	50	

color	Part number	Package
•	DK4-RD	100
•	DK4-BL	100

Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	1.0x5.5mm	/

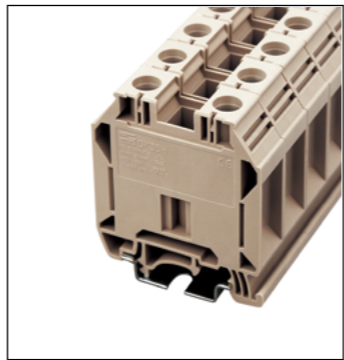


DK35H		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	150A	150A
SOL wire(AWG/mm ²)	12~1/0 / 2.5~50	
STR wire(AWG/mm ²)	12~1/0 / 2.5~50	
Rated impulse voltage	8KV	
Torque(N·m)	3.5	6.9
Screws	M6	
Stripping length	16~18mm	
Insulation materials	PA	
TxHxW(mm)	16x60.3x52	
Package	50	

color	Part number	Package
•	DK6-RD	100
•	DK6-BL	100

Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	1.0x5.5mm	/

- *
- Without jumper 600V/100A at torque value 2.5~3.4Nm
 - With jumper DS16 : 600V/95A at torque value 2.5Nm : 600V/100A at torque value 3.4Nm
 - With jumper CSC-16 : 600V/90A at torque value 2.5Nm : 600V/100A at torque value 3.4Nm

Feed-Through Screw Connection Terminal Blocks



DK series can be installed onto the TS-32 & TS-35 DIN rail and is widely used in power industry.



Wire cage is specially designed for high reliability, vibration proof, and with large contacting area for wiring secureness.

Products are available for wire sizes from 2.5 mm² to 240mm².

The wire entry hole allows wire to be used with ferrules within the nominal cross section.

Compliant with IEC 60947-7-7 & UL 1059. Products are certified by CUL, UL and VDE.


DK

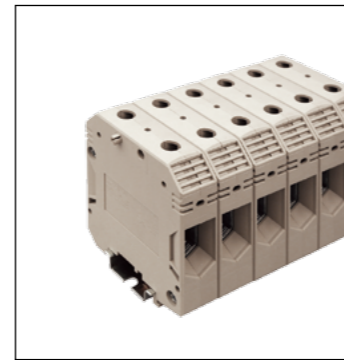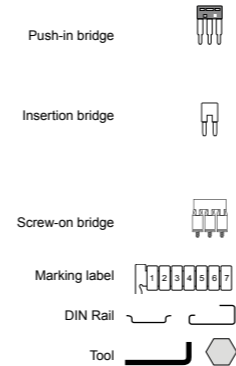

DK50		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	150A	150A
SOL wire(AWG/mm ²)	6~2(105A) / 16~50	
STR wire(AWG/mm ²)	6~1/0 / 16~50	
Rated impulse voltage	8KV	
Torque(N·m)	5.6	
Screws	M6	
Stripping length	25~30mm	
Insulation materials	PA	
TxHxW(mm)	20x75.8x70.5	
Package	20	

color	Part number	Package
•	DK50-RD	20
•	DK50-BL	20


Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	1.0x5.5mm	/

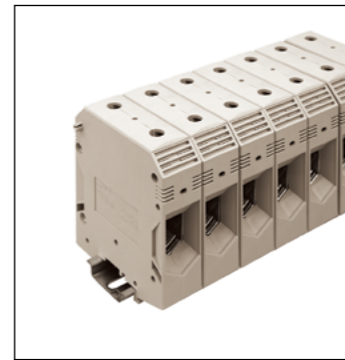

DK95		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	230A	232A
SOL wire(AWG/mm ²)	2(100A) / 35~95	
STR wire(AWG/mm ²)	6~1/0 / 16~50	
Rated impulse voltage	8KV	
Torque(N·m)	10	
Screws	M8	
Stripping length	30~35mm	
Insulation materials	PA	
TxHxW(mm)	32.2x88.5x80	
Package	20	

color	Part number	Package
•	DK95-RD	20
•	DK95-BL	20

Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	1.0x5.5mm	/

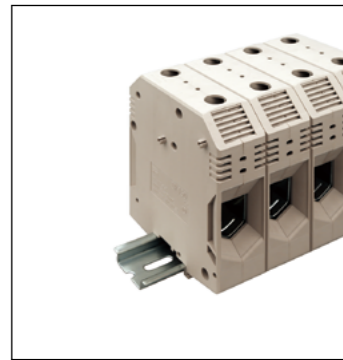


DK150		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	1000V
Rated Current	275A	309A
SOL wire(AWG/mm ²)	2(125A) / 35~150	
STR wire(AWG/mm ²)	2~300 / 35~150(kcmil)	
Rated impulse voltage	8KV	
Torque(N·m)	19	
Screws	M10	
Stripping length	30~40mm	
Insulation materials	PA	
TxHxW(mm)	38x108.1x93	
Package	5	

color	Part number	Package
•	DK150-RD	5
•	DK150-BL	5

Accessories	Part number	Package
End cover	DK2.5C	50
Partition plate	DKSPS-002	50
Partition plate	DKSPS-001	50
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	1.0x5.5mm	/

Screw Connection

Feed-Through Screw Connection Terminal Blocks



DK series can be installed onto the TS-32 & TS-35 DIN rail and is widely used in power industry.


Wire cage is specially designed for high reliability, vibration proof, and with large contacting area for wiring secureness.

Products are available for wire sizes from 2.5 mm² to 240mm².

The wire entry hole allows wire to be used with ferrules within the nominal cross section.

Compliant with IEC 60947-7-7 & UL 1059. Products are certified by CUL, UL and VDE.

DK

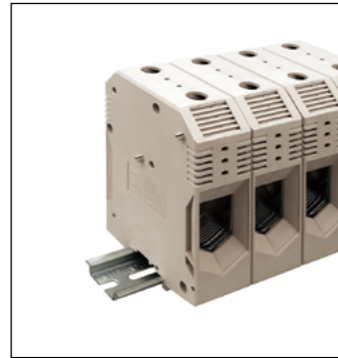







DK240

Safety certification		
Specification		
	UL	IEC
Rated Voltage	600V	1000V
Rated Current	370A	415A
SOL wire(AWG/mm ²)	95~240	
STR wire(AWG/mm ²)	300~500 / 95~240(kcmil)	
Rated impulse voltage	8KV	
Torque(N-m)	19	
Screws	M10	
Stripping length	30~40mm	
Insulation materials	PA	
TxHxW(mm)	43x125.1x93	
Package	10	

color	Part number	Package
•	DK240-RD	50
•	DK240-BL	50

Accessories	Part number	Package
	CSC-24002P	10
	CSC-24003P	10

Accessories	Part number	Package
	TM28	10
	TS-35N / TS-32	20



DK240

Safety certification		
Specification		
	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package



DK240


Safety certification		
Specification		
	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Accessories	Part number	Package

Feed-Through Screw Connection Terminal Blocks




Designed with four connections, compact and space saving.

Solid structure and high reliability designed to meet the vibration and harsh thermal variation requirement.

Accessories are complete, easy for identification, partition and bridging applications.

Compliant with IEC 60947-7-1 & UL 1059.

DK..TR






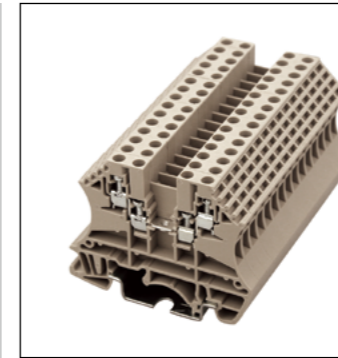


DK1.5-TR

Safety certification		
Specification		
	UL	IEC
Rated Voltage	300V	630V
Rated Current	10A	17.5A
SOL wire(AWG/mm ²)	22~14 / 0.5~1.5	
STR wire(AWG/mm ²)	22~14 / 0.5~1.5	
Rated impulse voltage	8KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6~7mm	
Insulation materials	PA	
TxHxW(mm)	5.1x46.8x58.9	
Package	100	

color	Part number	Package
•	DK1.5-TR-RD	50
•	DK1.5-TR-BL	50


Accessories	Part number	Package
	DK1.5C-TR	50



	Part number	Package
2 way	CSC-2.502P	50
3 way	CSC-2.503P	50
4 way	CSC-2.504P	50
5 way	CSC-2.505P	10
10 way	CSC-2.510P	10

	Part number	Package
2 way	DS2.5-02P	50
3 way	DS2.5-03P	50
4 way	DS2.5-04P	50
5 way	DS2.5-05P	10
10 way	DS2.5-10P	10

	Part number	Package
	TM26	10
	TS-35N / TS-32	20
	0.4x2.5mm	/

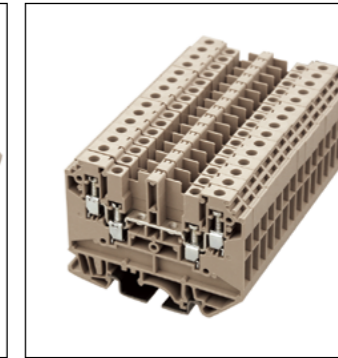

DK4-TR

Safety certification		
Specification		
	UL	IEC
Rated Voltage	300V	630V
Rated Current	16A	32A
SOL wire(AWG/mm ²)	22~12 / 0.14~6	
STR wire(AWG/mm ²)	22~12 / 0.14~4	
Rated impulse voltage	8KV	
Torque(N-m) *	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x50.34x66	
Package	50	

color	Part number	Package
•	DK4-TR-RD	50
•	DK4-TR-BL	50


Accessories	Part number	Package
	DK4C-TR	50
	DK4S-007	50

	Part number	Package
	CSC-402PN	50
	CSC-403PN	50
	CSC-404PN	50
	CSC-405PN	10
	CSC-410PN	10

	Part number	Package
	DS4-02P	50
	DS4-03P	50
	DS4-04P	50
	DS4-05P	10
	DS4-10P	10

	Part number	Package
	TM21	10
	TS-35N / TS-32	20
	0.5X3mm	/

Bi-Level Screw Connection Terminal Blocks

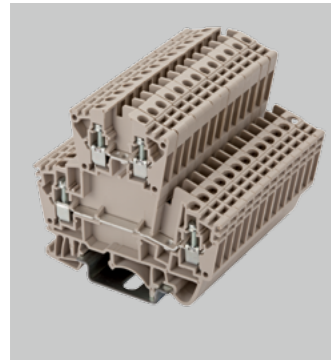


Four connections, each connection has individual marker carrier for easy identification.

Diode can be installed as an option to regulate conduction direction.

Using the same bridging structure as other DK series products, which power distribution can be adjusted using a variety of bridges.

Accessories are complete, easy for identification, partition and bridging applications.


DKK

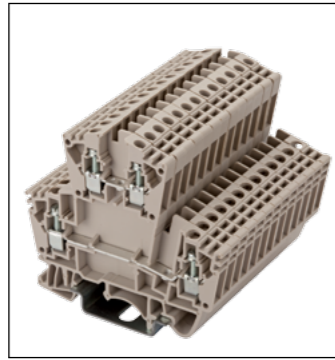

DKK2.5		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.5~2.5	
STR wire(AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	

color	Part number	Package
•	DKK2.5-RD	100
•	DKK2.5-BL	100

Accessories	Part number	Package
End cover	DKK2.5C	50

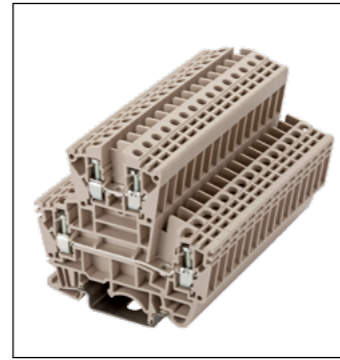

DKK4		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.14~4	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.49	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x62.85x69.4	
Package	100	

color	Part number	Package
•	DKK4-RD	50
•	DKK4-BL	50

Accessories	Part number	Package
End cover	DKK2.5C	50



DKK4-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.14~4	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x62.85x69.4	
Package	100	


color	Part number	Package
•	DKK4-RD	50
•	DKK4-BL	50

Accessories	Part number	Package
End cover	DKK2.5C	50

- End cover
- Partition plate
- Push-in bridge
- Insertion bridge
- Screw-on bridge
- Marking label
- DIN Rail
- Tool

2 way	CSC-2.502P	50	CSC-402PN	50
3 way	CSC-2.503P	50	CSC-403PN	50
4 way	CSC-2.504P	50	CSC-404PN	50
5 way	CSC-2.505P	10	CSC-405PN	10
10 way	CSC-2.510P	10	CSC-410PN	10
2 way	DS2.5-02P	50	DS4-02P	50
3 way	DS2.5-03P	50	DS4-03P	50
4 way	DS2.5-04P	50	DS4-04P	50
5 way	DS2.5-05P	10	DS4-05P	10
10 way	DS2.5-10P	10	DS4-10P	10
	TM20	10	TM21	10
	TS-35N / TS-32	20	TS-35N / TS-32	20
	0.4x2.5mm	/	0.4X2.5mm	/

Bi-Level Screw Connection Terminal Blocks

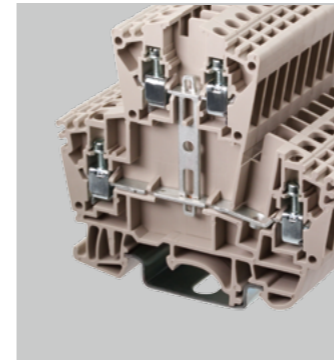


Four connections, each connection has individual marker carrier for easy identification.

Diode can be installed as an option to regulate conduction direction.

Using the same bridging structure as other DK series products, which power distribution can be adjusted using a variety of bridges.

Accessories are complete, easy for identification, partition and bridging applications.


DKK...-PV

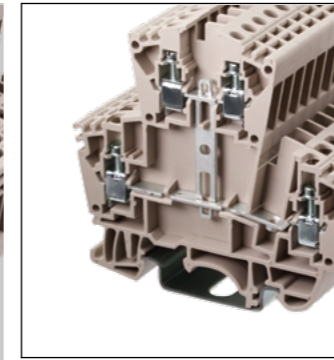

DKK2.5-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	400V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.5~2.5	
STR wire(AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	

color	Part number	Package
•	DKK2.5-RD	100
•	DKK2.5-BL	100

Accessories	Part number	Package
End cover	DKK2.5C	50

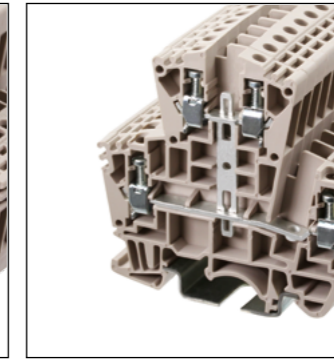


DKK4-PV		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	630V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.14~4	
STR wire(AWG/mm ²)	22~10 / 0.14~4	
Rated impulse voltage	6KV	
Torque(N-m)	0.6	
Screws	M3	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	6.1x62.85x69.4	
Package	100	

color	Part number	Package
•	DKK4-RD	50
•	DKK4-BL	50

Accessories	Part number	Package
End cover	DKK2.5C	50


- End cover
- Partition plate
- Push-in bridge
- Insertion bridge
- Screw-on bridge
- Marking label
- DIN Rail
- Tool

2 way	CSC-2.502P	50	CSC-402PN	50
3 way	CSC-2.503P	50	CSC-403PN	50
4 way	CSC-2.504P	50	CSC-404PN	50
5 way	CSC-2.505P	10	CSC-405PN	10
10 way	CSC-2.510P	10	CSC-410PN	10
2 way	DS2.5-02P	50	DS4-02P	50
3 way	DS2.5-03P	50	DS4-03P	50
4 way	DS2.5-04P	50	DS4-04P	50
5 way	DS2.5-05P	10	DS4-05P	10
10 way	DS2.5-10P	10	DS4-10P	10
	TM20	10	TM21	10
	TS-35N / TS-32	20	TS-35N / TS-32	20
	0.4x2.5mm	/	0.4X2.5mm	/




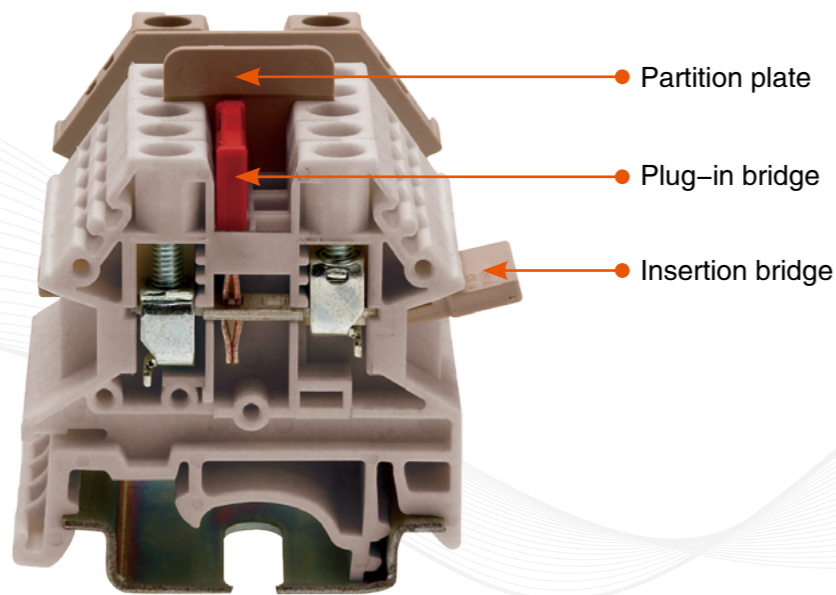


Product features are :

- The high quality carbon steel material used for the wire cage offers superior torque for wiring. The zinc plated surface helps prevent corrosion.
- Innovative compact design with industrial standard mounting foot structure is suitable for TS-35 & G type rail mounting.
- Feed-through screw connection design and a variety of functional designs are available.
- Sturdy wire cage design for large wiring contact surface; vibration proof and reliable.
- Power distribution can be adjusted by using top and side insertion bridges.
- Terminal blocks are compliant with IEC 60947-7-1 and UL 1059 standard.

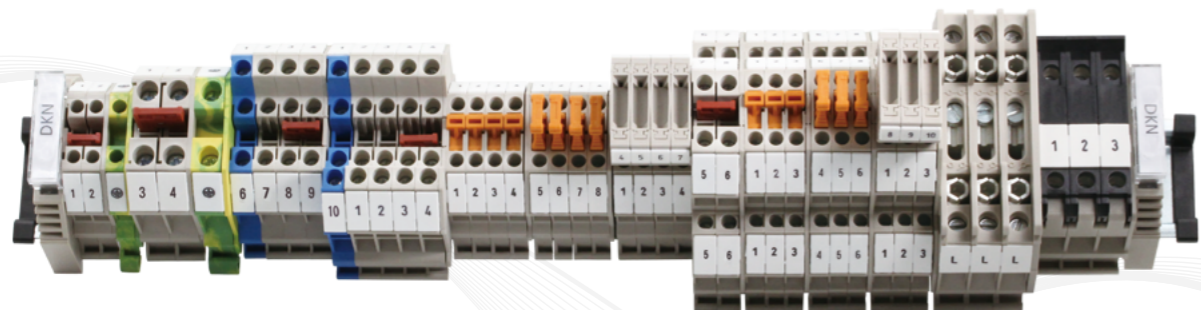

Screw Connection Grounding Terminal Blocks

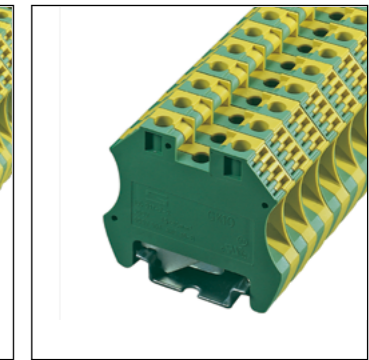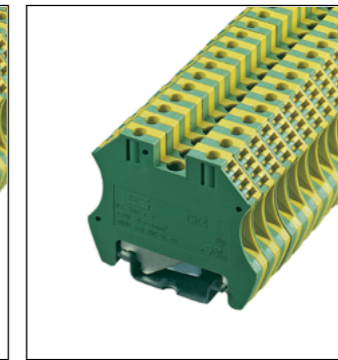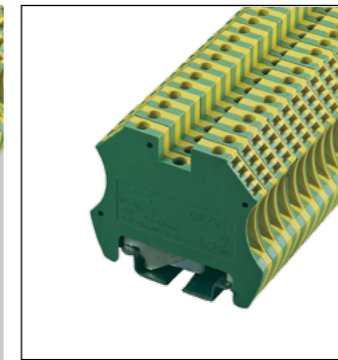

Hardened steel wire cage to ensure secure wiring.

High conductivity and low resistance conducting material for safe grounding.

Suitable for wire sizes from 2.5 mm² to 95mm².

Compliant with IEC 60947-7-7 & UL 1059 and certified by CUL, UL and VDE.

DK...-PE

DK2.5-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.5~2.5	
STR wire(AWG/mm ²)	26~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N·m)	Wire	0.8
	DIN Rail	0.52
Screws	M3	
Stripping length	10~14mm	
Insulation materials	PA	
TxHxW(mm)	5.7x46.4x56	
Package	100	
color	Part number	Package


DK4-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	26~12 / 0.5~4	
STR wire(AWG/mm ²)	26~12 / 0.5~4	
Rated impulse voltage	8KV	
Torque(N·m)	Wire	0.8
	DIN Rail	0.52
Screws	M3	
Stripping length	12~16mm	
Insulation materials	PA	
TxHxW(mm)	6.6x46.4x56	
Package	100	
color	Part number	Package

DK10-PE		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	16~8 / 1.5~10	
STR wire(AWG/mm ²)	16~8 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N·m)	Wire	1.76
	DIN Rail	0.8
Screws	M4	
Stripping length	12~16mm	
Insulation materials	PA	
TxHxW(mm)	10.4x46.4x56	
Package	50	
color	Part number	Package


Accessories	Part number	Package
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM26	10
DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/

Accessories	Part number	Package
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM27	10
DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/

Accessories	Part number	Package
Push-in bridge		
Insertion bridge		
Screw-on bridge		
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	0.8x4mm	/



Screw Connection Grounding Terminal Blocks

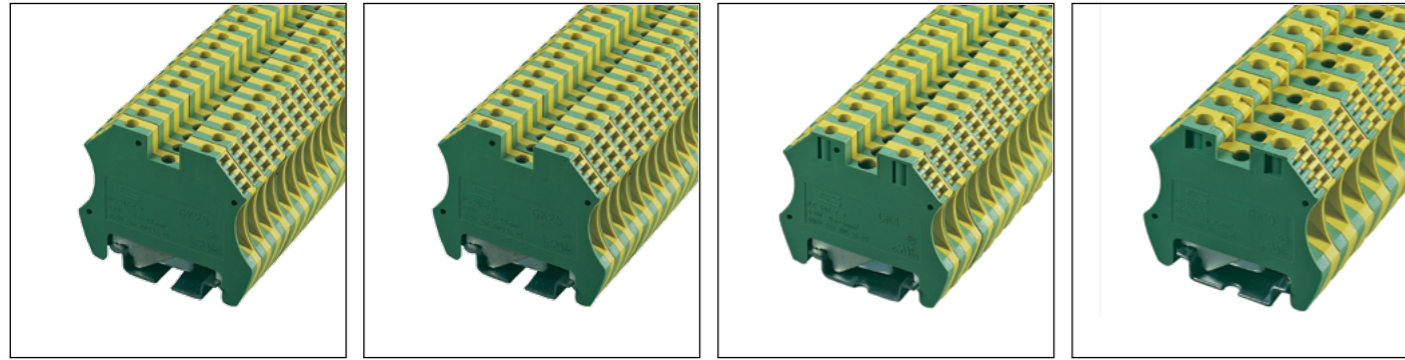

DK16-PE			DK35H-PE			DK50-PE			DK95-PE		
Safety certification			Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage			Rated Voltage			Rated Voltage			Rated Voltage		
Rated Current			Rated Current			Rated Current			Rated Current		
SOL wire(AWG/mm ²)	14~6 / 2.5~16		SOL wire(AWG/mm ²)	12~1(for copper rail) / 4~50 12~3(for copper rail) / 4~50		SOL wire(AWG/mm ²)	6 / 16~50		SOL wire(AWG/mm ²)	2 / 35~95	
STR wire(AWG/mm ²)	14~6 / 2.5~16		STR wire(AWG/mm ²)	12~1(for copper rail) / 4~50 12~3(for copper rail) / 4~50		STR wire(AWG/mm ²)	6 / 16~50		STR wire(AWG/mm ²)	2~4/0 / 35~95	
Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV	
Torque(N·m)	Wire	3.4	Torque(N·m)	Wire	3.5	Torque(N·m)	Wire	7.9	Torque(N·m)	Wire	17.9
	DIN Rail	0.8		DIN Rail	1.5		DIN Rail	3.3		DIN Rail	5.6
Screws	M5		Screws	M6		Screws	M6		Screws	M8	
Stripping length	14~18mm		Stripping length	16~18mm		Stripping length	20~25mm		Stripping length	20~25mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	12x62.4x56		TxHxW(mm)	16x61.2x52		TxHxW(mm)	20x70.27x70.5		TxHxW(mm)	25x82.93x80	
Package	20		Package	20		Package	10		Package	10	


color	Part number	Package	color	Part number	Package	color	Part number	Package	color	Part number	Package

Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package

TM28	10	TM28	10	TM28	10	TM28	10
TS-35N / TS-32	20	TS-35N / TS-32	20	TS-35N / TS-32	20	TS-35N / TS-32	20
1.0x5.5mm	/	1.0x5.5mm	/				

(Copper DIN rail intallation) (Copper DIN rail intallation)

Disconnect Terminal Blocks

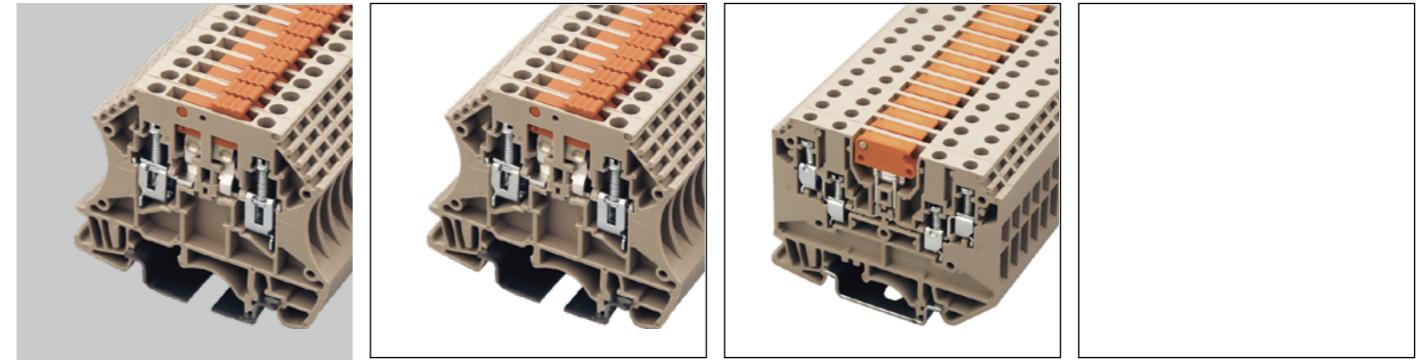

The feed-through connector is easy to use for disconnection purpose.

Suitable for wire sizes from 2.5 mm² to 95mm².

Accessories are complete, easy for identification, partition and bridging applications.

Compliant with IEC 60947-7-7 & UL 1059 .

DK...-TR-TG

- End cover
- Partition plate
- Push-in bridge
- Insertion bridge
- Screw-on bridge
- Marking label
- DIN Rail
- Tool


DK2.5-TG			DK4-TR-TG			Safety certification		
Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	600V	Rated Voltage	300V	800V			
Rated Current	10A	15A	Rated Current	10A	32A			
SOL wire(AWG/mm ²)	26~14 / 0.5~2.5		SOL wire(AWG/mm ²)	22~10 / 0.5~4				
STR wire(AWG/mm ²)	26~14 / 0.5~2.5		STR wire(AWG/mm ²)	22~10 / 0.5~4				
Rated impulse voltage	6KV		Rated impulse voltage	8KV				
Torque(N·m)	0.8		Torque(N·m)	0.8				
Screws	M3		Screws	M3				
Stripping length	9~10mm		Stripping length	9~10mm				
Insulation materials	PA		Insulation materials	PA				
TxHxW(mm)	5.1x46.8x58.9		TxHxW(mm)	6.1x50.34x66				
Package	100		Package	100				

color	Part number	Package	color	Part number	Package	color	Part number	Package
•	DK2.5-TG-RD	100	•	DK4-TR-TG-RD	100			
•	DK2.5-TG-BL	100	•	DK4-TR-TG-BL	100			

Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
	DK2.5C	50		DK4C-TR-TG	50			
	DKSPS-002	50						
2 way	CSC-2.502P	50		CSC-402PN	50			
3 way	CSC-2.503P	50		CSC-403PN	50			
4 way	CSC-2.504P	50		CSC-404PN	50			
5 way	CSC-2.505P	10		CSC-405PN	10			
10 way	CSC-2.510P	10		CSC-410PN	10			

TM26	10	TM21	10
TS-35N / TS-32	20	TS-35N / TS-32	20
0.5X3mm	/	0.5X3mm	/

Fuse Terminal Blocks





DK4-TF series offers the fuse function, the product can be installed onto the TS-35 & TS-32 DIN rail.

The standard 5x20mm fuse can be installed in the fuse compartment. The fuse holder can be lifted for easy fuse replacement.

Led indicator is available as an option for indicating that a fuse has blown.


DK...-TF

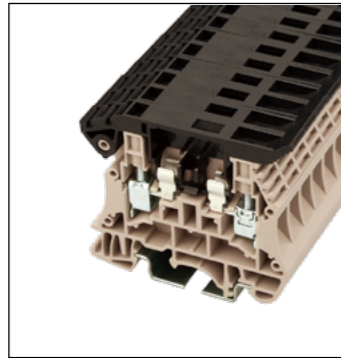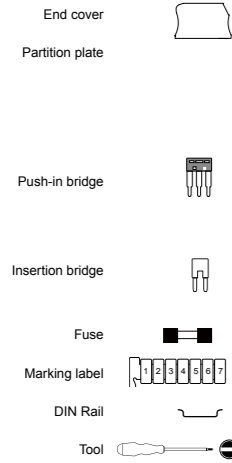

DK4-TF(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	800V
Rated Current	16A	6.3A
SOL wire(AWG/mm ²)	24~12 / 0.5~4	
STR wire(AWG/mm ²)	24~12 / 0.5~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.8	
Screws	M3	
Stripping length	10~12mm	
Insulation materials	PA	
TxHxW(mm)	8x55x60.5	
Package	50	

color	Part number	Package
-------	-------------	---------


Accessories	Part number	Package
End cover	DK4C-TF(5X20)	100
Push-in bridge	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
Fuse	FUK6.3A-01	50
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/

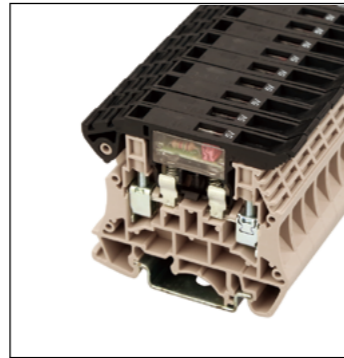

DK4-TFL(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	800V
Rated Current	16A	6.3A
SOL wire(AWG/mm ²)	24~12 / 0.5~4	
STR wire(AWG/mm ²)	24~12 / 0.5~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.8	
Screws	M3	
Stripping length	10~12mm	
Insulation materials	PA	
TxHxW(mm)	8x55x60.5	
Package	50	

color	Part number	Package
-------	-------------	---------

Accessories	Part number	Package
End cover	DK4C-TF(5X20)	100
Push-in bridge	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
Fuse	FUK6.3A-01	50
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/

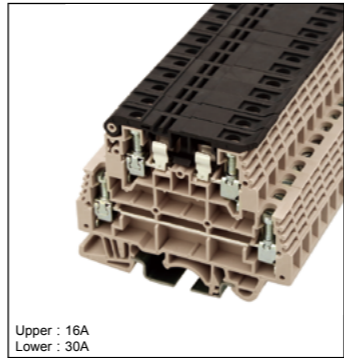

Upper : 16A
Lower : 30A


DKK4-TF(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	300V	800V
Rated Current	16A / 30A	16 / 30A
SOL wire(AWG/mm ²)	22~10 / 0.5~4	
STR wire(AWG/mm ²)	22~10 / 0.5~4	
Rated impulse voltage	8KV	
Torque(N-m)	0.67	
Screws	M3.5	
Stripping length	10~12mm	
Insulation materials	PA	
TxHxW(mm)	8x55.9x72.5	
Package	100	

color	Part number	Package
-------	-------------	---------

Accessories	Part number	Package
End cover	DKK4C-TF(5X20)	100
Push-in bridge	CSC-602PN	50
	CSC-603PN	50
	CSC-604PN	50
	CSC-605PN	10
	CSC-610PN	10
Fuse	FUK6.3A-01	50
Marking label	TM28	10
DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/

Part number	LED	Voltage
DK4N-TFL5(5X20)	with LED light	5V
DK4N-TFL12(5X20)	with LED light	12V
DK4N-TFL24(5X20)	with LED light	24V
DK4N-TFL48(5X20)	with LED light	48V
DK4N-TFL110(5X20)	with LED light	110V
DK4N-TFL220(5X20)	with LED light	220V
DK4N-TFL300(5X20)	with LED light	300V
DK4N-TFL380(5X20)	with LED light	380V

Fuse Terminal Blocks





DK10-TF series is a fuse terminal block with screw cap for 5x20mm fuse inserts.

DK10-TF series can be installed onto the TS-35 & TS-32 DIN rail.

The transparent screen on the screw cap allows the blown fuse to be identified quickly.


DK...-TF

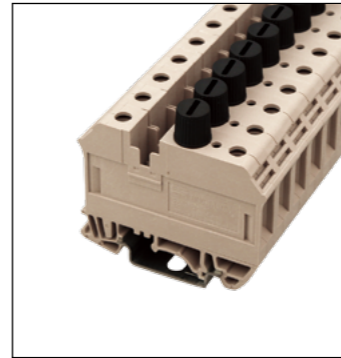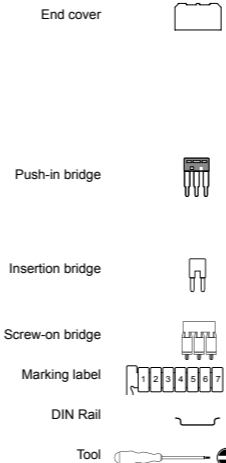

DK10-TF(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	6.3A	6.3A
SOL wire(AWG/mm ²)	22~6 / 1.5~10	
STR wire(AWG/mm ²)	22~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N-m)	1.8	
Screws	M4	
Stripping length	12~16mm	
Insulation materials	PA	
TxHxW(mm)	12x47.2x61.3	
Package	50	

color	Part number	Package
-------	-------------	---------

Accessories	Part number	Package
End cover	DK4C-TF(5X20)	100
Push-in bridge	CSC-1602P	10
	CSC-1603P	10
	CSC-1604P	10
	CSC-1605P	10
	CSC-1610P	10
Screw-on bridge	DS16-02P	10
	DS16-10P	10
Marking label	TM22	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

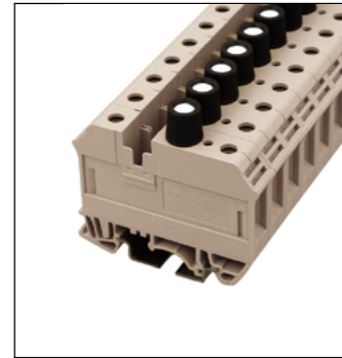

DK10-TFA(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	6.3A	6.3A
SOL wire(AWG/mm ²)	22~6 / 1.5~10	
STR wire(AWG/mm ²)	22~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N-m)	1.8	
Screws	M4	
Stripping length	12~16mm	
Insulation materials	PA	
TxHxW(mm)	12x47.2x61.3	
Package	50	

color	Part number	Package
-------	-------------	---------

Accessories	Part number	Package
End cover	DK4C-TF(5X20)	100
Push-in bridge	CSC-1602P	10
	CSC-1603P	10
	CSC-1604P	10
	CSC-1605P	10
	CSC-1610P	10
Screw-on bridge	DS16-02P	10
	DS16-10P	10
Marking label	TM22	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/




DK10-TF(5X20)		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	6.3A	6.3A
SOL wire(AWG/mm ²)	22~6 / 1.5~10	
STR wire(AWG/mm ²)	22~6 / 1.5~10	
Rated impulse voltage	8KV	
Torque(N-m)	1.8	
Screws	M4	
Stripping length	12~16mm	
Insulation materials	PA	
TxHxW(mm)	12x47.2x61.3	
Package	50	

color	Part number	Package
-------	-------------	---------

Accessories	Part number	Package
End cover	DK4C-TF(5X20)	100
Push-in bridge	CSC-1602P	10
	CSC-1603P	10
	CSC-1604P	10
	CSC-1605P	10
	CSC-1610P	10
Screw-on bridge	DS16-02P	10
	DS16-10P	10
Marking label	TM22	10
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

Test Disconnect Terminal Blocks

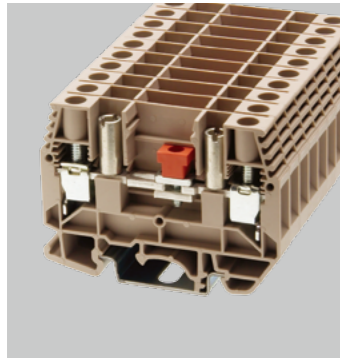



A simple connection testing in secondary circuits of current transformer can be done by DKTL6 and DKTD6.

With the design of slide-type bridge, connection and disconnection for various task purpose can be easily switched.


Testing probe in 4mm diameter size can be used to check circuit through the test sockets.

The advantages of DKT series include compact size, convenience to install, clear indication and easy to use.

DKT

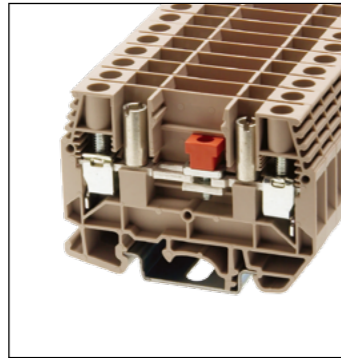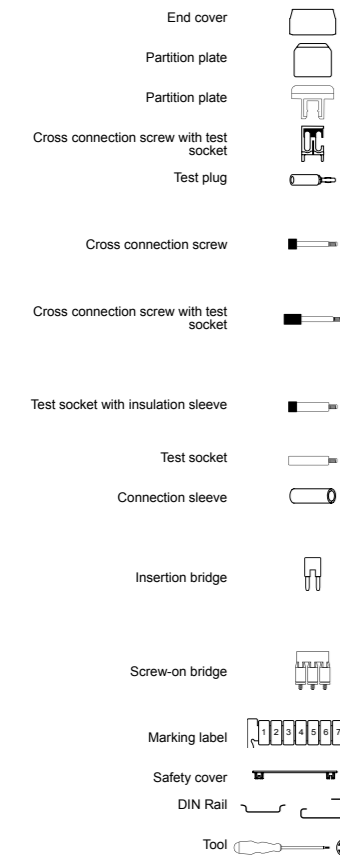


DKTD6		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V/600V	800V
Rated Current	48A/5A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)	2	
Screws	M4	
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	8x65.2x47.65	
Package	50	
color	Part number	Package
•	DKTD6-RD	50
•	DKTD6-BL	50
Accessories	Part number	Package
End cover	DKTLC	50
Partition plate	DKSPS-006	50
Partition plate	DKTLP	50
Cross connection screw with test socket	2 way DS6A02P 3 way DS6A03P	50 50
Test plug	Black C002-0101-BK Red C002-0101-RD	50 50
Cross connection screw	Black DS6S1 Orange DS6S1-OR Yellow DS6S1-YW Red DS6S1-RD	50 50 50 50
Cross connection screw with test socket	Black DS6S2 Orange DS6S2-OR Yellow DS6S2-YW Red DS6S2-RD	50 50 50 50
Test socket with insulation sleeve	Black DS6S3 Orange DS6S3-OR Yellow DS6S3-YW Red DS6S3-RD	50 50 50 50
Test socket	C002-0201	50
Connection sleeve	C003-0201	50
Insertion bridge	2 way CSC-602P 3 way CSC-603P 4 way CSC-604P 5 way CSC-605P 10 way CSC-610P	50 50 50 10 10
Screw-on bridge	2 way DS6-02P 3 way DS6-03P 4 way DS6-04P 5 way DS6-05P 10 way DS6-10P	50 50 50 10 10
Marking label	TM-28	10
Safety cover	DKTD6-KP	50
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/

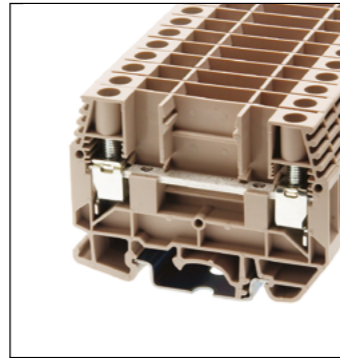


DKTL6		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V/600V	800V
Rated Current	48A/5A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	8KV	
Torque(N-m)	2	
Screws	M4	
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	8x65.2x47.65	
Package	50	
color	Part number	Package
•	DKTD6-RD	50
•	DKTD6-BL	50
Accessories	Part number	Package
End cover	DKTLC	50
Partition plate	DKSPS-006	50
Partition plate	DKTLP	50
Cross connection screw with test socket	2 way DS6A02P 3 way DS6A03P	50 50
Test plug	Black C002-0101-BK Red C002-0101-RD	50 50
Cross connection screw	Black DS6S1 Orange DS6S1-OR Yellow DS6S1-YW Red DS6S1-RD	50 50 50 50
Cross connection screw with test socket	Black DS6S2 Orange DS6S2-OR Yellow DS6S2-YW Red DS6S2-RD	50 50 50 50
Test socket with insulation sleeve	Black DS6S3 Orange DS6S3-OR Yellow DS6S3-YW Red DS6S3-RD	50 50 50 50
Test socket	C002-0201	50
Connection sleeve	C003-0201	50
Insertion bridge	2 way CSC-602P 3 way CSC-603P 4 way CSC-604P 5 way CSC-605P 10 way CSC-610P	50 50 50 10 10
Screw-on bridge	2 way DS6-02P 3 way DS6-03P 4 way DS6-04P 5 way DS6-05P 10 way DS6-10P	50 50 50 10 10
Marking label	TM-28	10
Safety cover	DKTD6-KP	50
DIN Rail	TS-35N / TS-32	20
Tool	0.6x3.5mm	/



DKK2.5 with diodes		
Safety certification		
Specification	UL	IEC
Rated Voltage	250V	250V
Rated Current	0.5A	0.5A
Voltage Reversal	1000V	1000V
SOL wire (AWG/mm ²)	22~12 / 0.5~2.5	
STR wire (AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	
Accessories	Part number	Package
End cover	DKK2.5C	50
Push-in bridge	2 way CSC-2.502P 3 way CSC-2.503P 4 way CSC-2.504P 5 way CSC-2.505P 10 way CSC-2.510P	10 10 10 10 10
Screw-on bridge	2 way DS2.5-02P 3 way DS2.5-03P 4 way DS2.5-04P 5 way DS2.5-05P 10 way DS2.5-10P	50 50 50 10 10
Marking label	TM20	10
DIN Rail	TS-35N / TS-32	20
Tool	0.4x2.5mm	/



Diode Terminal Blocks


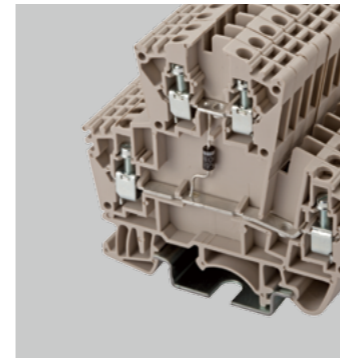


Diode component is installed to regulate the direction of current and to provide protection from the reverse voltage.


The design is only 5.1mm in width.

The direction of the diode can be changed to meet customers' requirement.


DKK2.5 with diodes

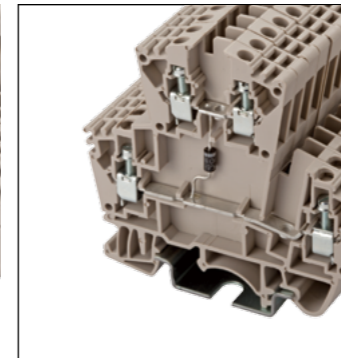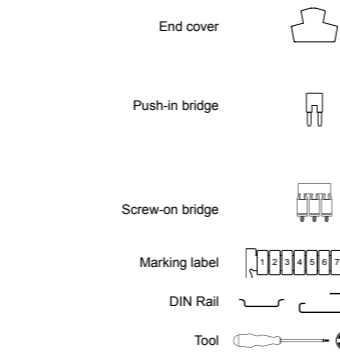


DKK2.5-D01		
Safety certification		
Specification	UL	IEC
Rated Voltage	250V	250V
Rated Current	0.5A	0.5A
Voltage Reversal	1000V	1000V
SOL wire (AWG/mm ²)	22~12 / 0.5~2.5	
STR wire (AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	
Accessories	Part number	Package
End cover	DKK2.5C	50
Push-in bridge	2 way CSC-2.502P 3 way CSC-2.503P 4 way CSC-2.504P 5 way CSC-2.505P 10 way CSC-2.510P	10 10 10 10 10
Screw-on bridge	2 way DS2.5-02P 3 way DS2.5-03P 4 way DS2.5-04P 5 way DS2.5-05P 10 way DS2.5-10P	50 50 50 10 10
Marking label	TM20	10
DIN Rail	TS-35N / TS-32	20
Tool	0.4x2.5mm	/

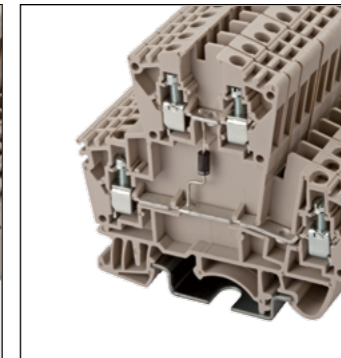


DKK2.5-D02		
Safety certification		
Specification	UL	IEC
Rated Voltage	250V	250V
Rated Current	0.5A	0.5A
Voltage Reversal	1000V	1000V
SOL wire (AWG/mm ²)	22~12 / 0.5~2.5	
STR wire (AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	
Accessories	Part number	Package
End cover	DKK2.5C	50
Push-in bridge	2 way CSC-2.502P 3 way CSC-2.503P 4 way CSC-2.504P 5 way CSC-2.505P 10 way CSC-2.510P	10 10 10 10 10
Screw-on bridge	2 way DS2.5-02P 3 way DS2.5-03P 4 way DS2.5-04P 5 way DS2.5-05P 10 way DS2.5-10P	50 50 50 10 10
Marking label	TM20	10
DIN Rail	TS-35N / TS-32	20
Tool	0.4x2.5mm	/

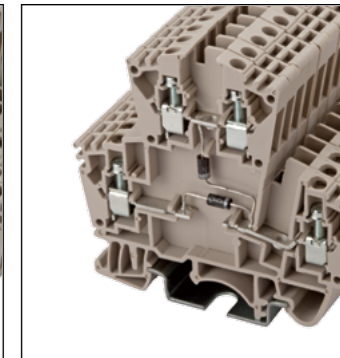

DKK2.5-D03		
Safety certification		
Specification	UL	IEC
Rated Voltage	250V	250V
Rated Current	0.5A	0.5A
Voltage Reversal	1000V	1000V
SOL wire (AWG/mm ²)	22~12 / 0.5~2.5	
STR wire (AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	6KV	
Torque(N-m)	0.4	
Screws	M2.5	
Stripping length	6mm	
Insulation materials	PA	
TxHxW(mm)	5.1x62.6x69.4	
Package	100	
Accessories	Part number	Package
End cover	DKK2.5C	50
Push-in bridge	2 way CSC-2.502P 3 way CSC-2.503P 4 way CSC-2.504P 5 way CSC-2.505P 10 way CSC-2.510P	10 10 10 10 10
Screw-on bridge	2 way DS2.5-02P 3 way DS2.5-03P 4 way DS2.5-04P 5 way DS2.5-05P 10 way DS2.5-10P	50 50 50 10 10
Marking label	TM20	10
DIN Rail	TS-35N / TS-32	20
Tool	0.4x2.5mm	/

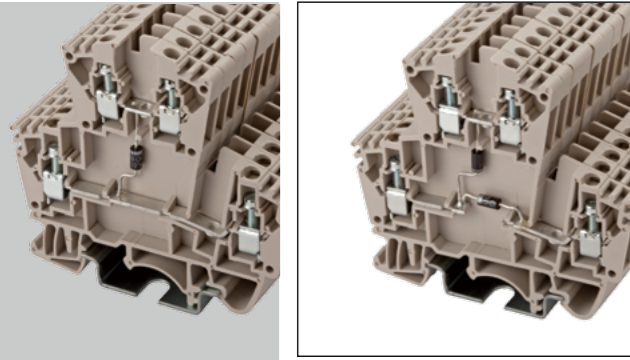

DKK2.5-D04








Diode component is installed to regulate the direction of current and to provide protection from the reverse voltage.

The design is only 5.1mm in width.

The direction of the diode can be changed to meet customers' requirement.

DKK2.5 with diodes

Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	250V	250V						
Rated Current	0.5A	0.5A						
Voltage Reversal	1000V	1000V						
SOL wire (AWG/mm ²)	22~12 / 0.5~2.5							
STR wire (AWG/mm ²)	22~12 / 0.5~2.5							
Rated impulse voltage	6KV							
Torque(N-m)	0.4							
Screws	M2.5							
Stripping length	6mm							
Insulation materials	PA							
TxHxW(mm)	5.1x62.6x69.4							
Package	100							
Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
End cover	DKK2.5C	50						
	CSC-2.502P	10						
Push-in bridge	CSC-2.503P	10						
	CSC-2.504P	10						
	CSC-2.505P	10						
	CSC-2.510P	10						
Screw-on bridge	DS2.5-02P	50						
	DS2.5-03P	50						
	DS2.5-04P	50						
	DS2.5-05P	10						
	DS2.5-10P	10						
Marking label	TM20	10						
DIN Rail	TS-35N / TS-32	20						
Tool	0.4x2.5mm	/						

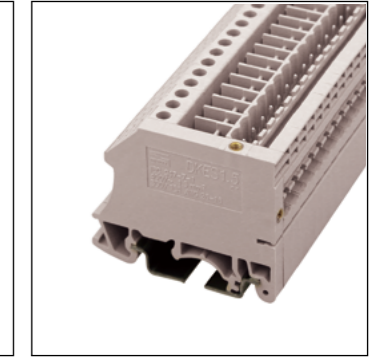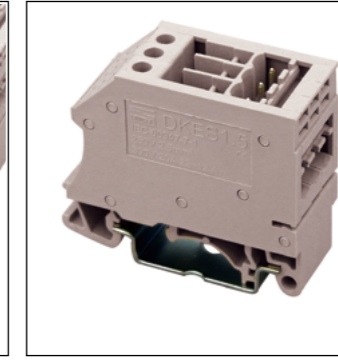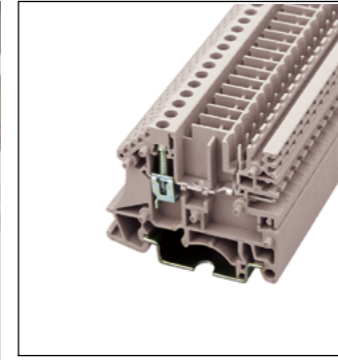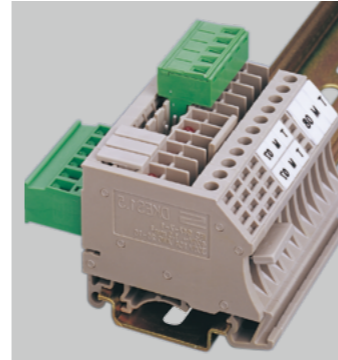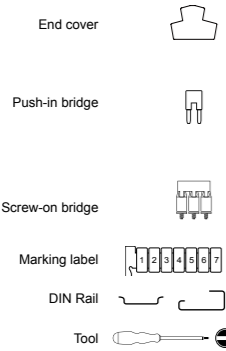


Mounting on TS-35 and TS-32 DIN rail, DKES series is equipped with sockets for pluggable connection.

Plug-in directions include both vertical and horizontal with various options of plugs.

Available accessories include protection covers, insertion bridges and marking labels.

Design is compliant with IEC 60947-7-1 and UL 1059.

DKES

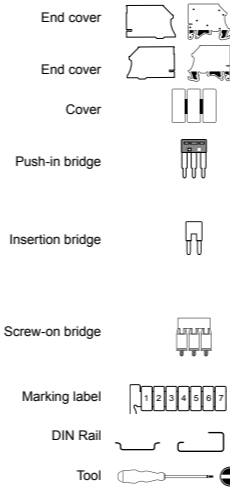


Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	250V	Rated Voltage	300V	250V	Rated Voltage	300V	250V
Rated Current	20A	24A	Rated Current	20A	24A	Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5	
STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	4KV		Rated impulse voltage	4KV		Rated impulse voltage	4KV	
Torque(N-m)	0.5		Torque(N-m)	0.5		Torque(N-m)	0.5	
Screws	M3		Screws	M3		Screws	M3	
Stripping length	9~10mm		Stripping length	9~10mm		Stripping length	9~10mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6	
color	Part number	Package	color	Part number	Package	color	Part number	Package
	DKES1.5	100		DKES1.5	100		DKES1.5	100

Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	250V	Rated Voltage	300V	250V	Rated Voltage	300V	250V
Rated Current	20A	24A	Rated Current	20A	24A	Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5	
STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	4KV		Rated impulse voltage	4KV		Rated impulse voltage	4KV	
Torque(N-m)	0.5		Torque(N-m)	0.5		Torque(N-m)	0.5	
Screws	M3		Screws	M3		Screws	M3	
Stripping length	9~10mm		Stripping length	9~10mm		Stripping length	9~10mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6	
color	Part number	Package	color	Part number	Package	color	Part number	Package
	DKES1.5	100		DKES1.5	100		DKES1.5	100


Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	250V	Rated Voltage	300V	250V	Rated Voltage	300V	250V
Rated Current	20A	24A	Rated Current	20A	24A	Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5		SOL wire(AWG/mm ²)	22~12 / 0.5~2.5	
STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5		STR wire(AWG/mm ²)	22~12 / 0.5~2.5	
Rated impulse voltage	4KV		Rated impulse voltage	4KV		Rated impulse voltage	4KV	
Torque(N-m)	0.5		Torque(N-m)	0.5		Torque(N-m)	0.5	
Screws	M3		Screws	M3		Screws	M3	
Stripping length	9~10mm		Stripping length	9~10mm		Stripping length	9~10mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6		TxHxW(mm)	50.8x42.4x50.6	
color	Part number	Package	color	Part number	Package	color	Part number	Package
	DKES1.5	100		DKES1.5	100		DKES1.5	100

Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
End cover (left)	DKES1.5CA / DKES1.5MCA	50	End cover (left)	DKES1.5CA / DKES1.5MCA	50	End cover (left)	DKES1.5CA / DKES1.5MCA	50
End cover (right)	DKES1.5CB / DKES1.5MCB	50	End cover (right)	DKES1.5CB / DKES1.5MCB	50	End cover (right)	DKES1.5CB / DKES1.5MCB	50
Cover	DKESP1.5-XXP	50	Cover	DKESP1.5-XXP	50	Cover	DKESP1.5-XXP	50
Push-in bridge			Push-in bridge			Push-in bridge		
Insertion bridge			Insertion bridge			Insertion bridge		
Screw-on bridge			Screw-on bridge			Screw-on bridge		
Marking label	TM20 / TM26	10	Marking label	TM20 / TM26	10	Marking label	TM20 / TM26	10
DIN Rail	TS-35N / TS-32	20	DIN Rail	TS-35N / TS-32	20	DIN Rail	TS-35N / TS-32	20
Tool	0.5x3mm	/	Tool	0.5x3mm	/	Tool	0.5x3mm	/

Plug	Part number	Plug	Part number	Plug	Part number
	2ESDV-XXP		2ESDV-XXP		2ESDV-XXP
	2ESDP-XXP		2ESDP-XXP		2ESDP-XXP
	2ESDF-XXP		2ESDF-XXP		2ESDF-XXP



Feed-Through Screw Connection Terminal Blocks




Compact design for TS-15 DIN rail mounting.

Hardened steel wire cage to ensure secure wiring, with anti-vibration design.

Available accessories include insertion bridges and marking labels.


Design is compliant with IEC 60947-7-1 and UL 1059.

DK..S

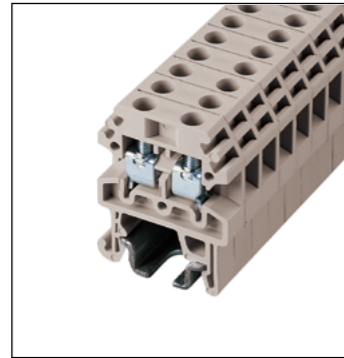


DK2.5S		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~2.5	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	4KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	7~9mm	
Insulation materials	PA	
TxHxW(mm)	5.1x28x22	
Package	100	

color	Part number	Package
•	DK2.5S-RD	100
•	DK2.5S-BL	100
Accessories	Part number	Package
	DK2.5PC	50

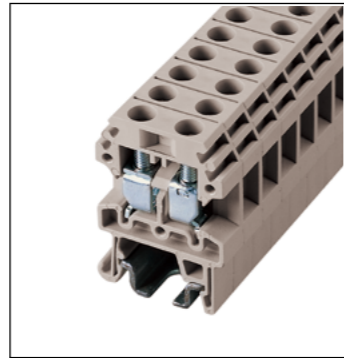

DK4S		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.34~4	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	4KV	
Torque(N·m)	0.6	0.5
Screws	M3	
Stripping length	7~9mm	
Insulation materials	PA	
TxHxW(mm)	6.1x31.5x22	
Package	100	

color	Part number	Package
•	DK4S-RD	100
•	DK4S-BL	100
Accessories	Part number	Package
	DK4PC	50

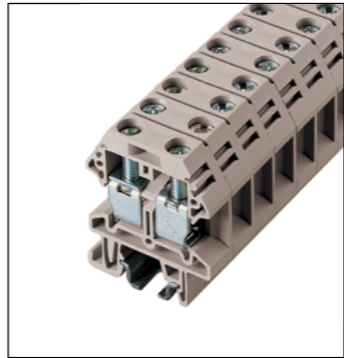

DK6S		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	50A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	4KV	
Torque(N·m)	1.2	
Screws	M4	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	8x37.4x30.3	
Package	50	

color	Part number	Package
•	DK6S-RD	100
•	DK6S-BL	100
Accessories	Part number	Package
	DK6PC	50

2 way	CSC-2.502PS	50
3 way	CSC-2.503PS	50
4 way	CSC-2.504PS	50
5 way	CSC-2.505PS	10
10 way	CSC-2.510PS	10

CSC-402PS	50
CSC-403PS	50
CSC-404PS	50
CSC-405PS	10
CSC-410PS	10

CSC-602PS	50
CSC-603PS	50
CSC-604PS	50
CSC-605PS	10
CSC-610PS	10


TM20	10
TS-15	20
0.5x3mm	/

TM21	10
TS-15	20
0.5x3.5mm	/

TM28	10
TS-15	20
0.8x4mm	/



Feed-Through Screw Connection Terminal Blocks




Compact design for TS-15 DIN rail mounting.

Hardened steel wire cage to ensure secure wiring, with anti-vibration design.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-7-1 and UL 1059.

DK..S

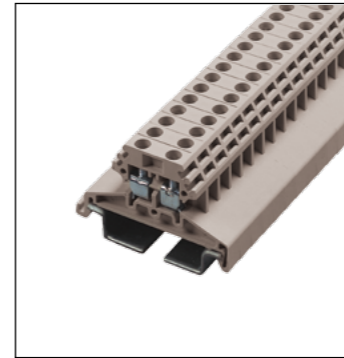

DK2.5P		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	20A	24A
SOL wire(AWG/mm ²)	22~12 / 0.34~2.5	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse voltage	4KV	
Torque(N·m)	0.4	
Screws	M2.5	
Stripping length	7~9mm	
Insulation materials	PA	
TxHxW(mm)	5.1x24x40	
Package	100	

color	Part number	Package
•	DK2.5P-RD	100
•	DK2.5P-BL	100
Accessories	Part number	Package
	DK2.5PC	50


2 way	CSC-2.502PS	50
3 way	CSC-2.503PS	50
4 way	CSC-2.504PS	50
5 way	CSC-2.505PS	10
10 way	CSC-2.510PS	10



DK4P		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	30A	32A
SOL wire(AWG/mm ²)	22~10 / 0.34~4	
STR wire(AWG/mm ²)	22~10 / 0.34~4	
Rated impulse voltage	4KV	
Torque(N·m)	0.6	0.5
Screws	M3	
Stripping length	7~9mm	
Insulation materials	PA	
TxHxW(mm)	6.1x27.3x40	
Package	100	

color	Part number	Package
•	DK4P-RD	100
•	DK4P-BL	100
Accessories	Part number	Package
	DK4PC	50

CSC-402PS	50
CSC-403PS	50
CSC-404PS	50
CSC-405PS	10
CSC-410PS	10

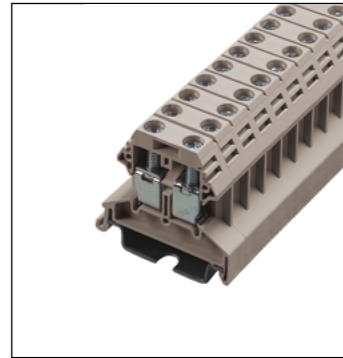

DK6P		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	50A	41A
SOL wire(AWG/mm ²)	20~8 / 0.5~6	
STR wire(AWG/mm ²)	20~8 / 0.5~6	
Rated impulse voltage	4KV	
Torque(N·m)	1.2	
Screws	M4	
Stripping length	9~11mm	
Insulation materials	PA	
TxHxW(mm)	8x36x40	
Package	100	

color	Part number	Package
•	DK6P-RD	100
•	DK6P-BL	100
Accessories	Part number	Package
	DK6PC	50

CSC-602PS	50
CSC-603PS	50
CSC-604PS	50
CSC-605PS	10
CSC-610PS	10

TM20	10
TS-15	20
0.5x3mm	/

TM21	10
TS-15	20
0.5x3.5mm	/

TM28	10
TS-15	20
0.8x4mm	/


Screw Connection

Stud Terminal Blocks



- DKM series - the Stud Terminal Blocks is designed specifically for safety of electricity distribution for the power industry.
- DKM series is available for wire size from 0.5mm² to 120mm². Maximum of four wire lugs can be used on one stud terminal block.
- Protection cover and partitions are available for higher safety requirement.

Stud Terminal Blocks

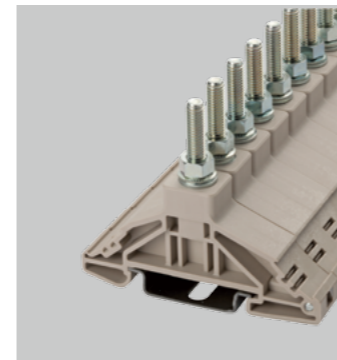


DKM series - the stud Terminal Blocks is designed specifically for safety of electricity distribution for the power industry.

DKM series is available for wire sizes from 0.5 mm² to 120mm².


Maximum of four wire lugs can be used on one stud terminal block.

Protection cover and partitions are available for higher safety requirement.


DKM

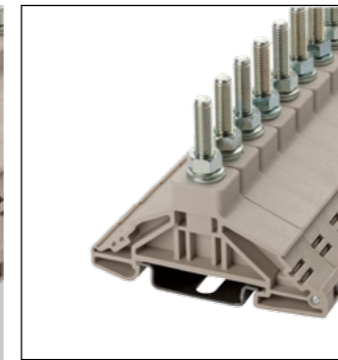

DKM5		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	85A	76A
SOL wire(AWG/mm ²)	16~4 / 0.5~16	
STR wire(AWG/mm ²)	16~4 / 0.5~16	
Rated impulse voltage	8KV	
Torque(N-m)	2~4	
Screws	M5	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	13x54x67	
Package	50	
color	Part number	Package

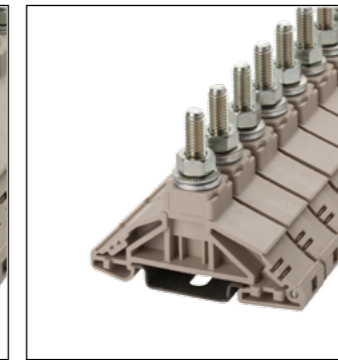


DKM6		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	115A	125A
SOL wire(AWG/mm ²)	14~2 / 2.5~35	
STR wire(AWG/mm ²)	14~2 / 2.5~35	
Rated impulse voltage	8KV	
Torque(N-m)	3~6	
Screws	M6	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	19.5x54x67	
Package	50	
color	Part number	Package




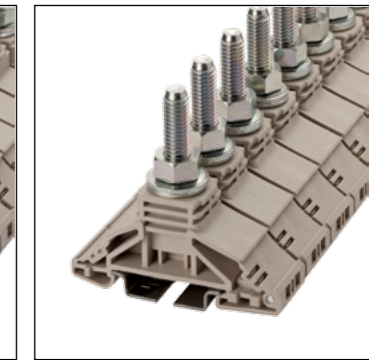


DKM8		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	150A	150A
SOL wire(AWG/mm ²)	14~1/0 / 2.5~50	
STR wire(AWG/mm ²)	14~1/0 / 2.5~50	
Rated impulse voltage	8KV	
Torque(N-m)	6~12	
Screws	M8	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	24.5x63x67	
Package	20	
color	Part number	Package

	Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
Partition plate		DKMSPS-001	50		DKMSPS-001	50		DKMSPS-002	50
Top cover		DKMC5	50		DKMC6	50		DKMC8	50
Marking label		TM28	10		TM28	10		TM28	10
DIN Rail		TS-35N	20		TS-35N	20		TS-35N	20

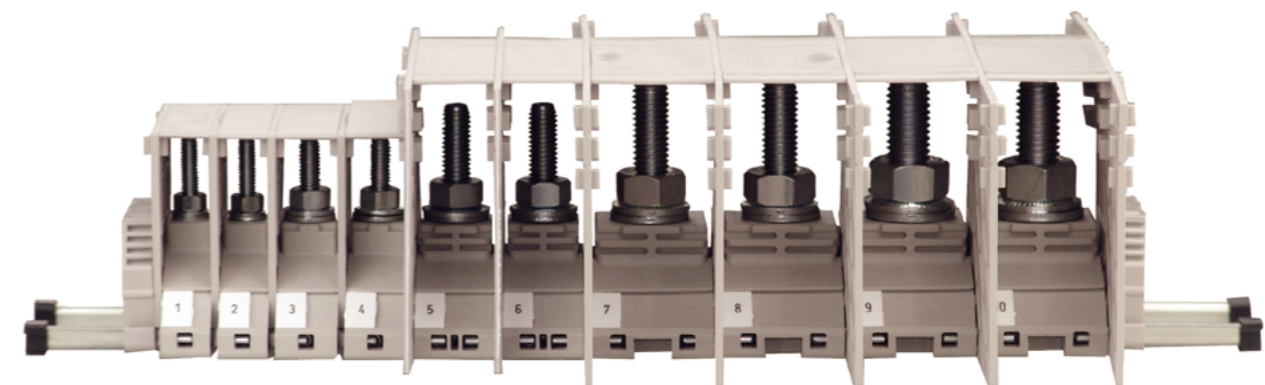

Stud Terminal Blocks

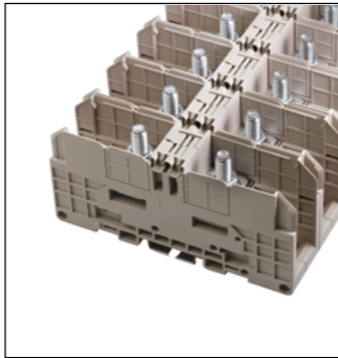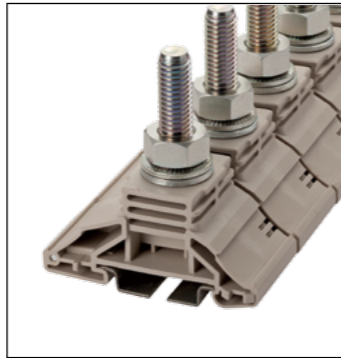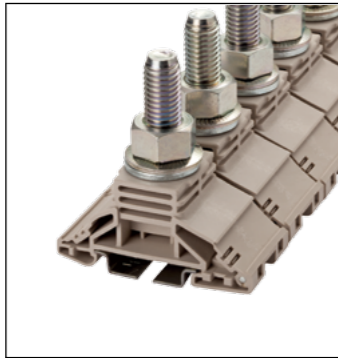

DKM series - the stud Terminal Blocks is designed specifically for safety of electricity distribution for the power industry.

DKM series is available for wire sizes from 0.5 mm² to 120mm².

Maximum of four wire lugs can be used on one stud terminal block.

Protection cover and partitions are available for higher safety requirement.


DKM

DKM10		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	255A	269A
SOL wire(AWG/mm ²)	10~250 / 6~120	
STR wire(AWG/mm ²)	10~250 / 6~120	
Rated impulse voltage	8KV	
Torque(N-m)	14~30	
Screws	M12	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	35.5x70x67	
Package	20	
color	Part number	Package





DKM12		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	255A	269A
SOL wire(AWG/mm ²)	10~250 / 6~120	
STR wire(AWG/mm ²)	10~250 / 6~120	
Rated impulse voltage	8KV	
Torque(N-m)	10~20	
Screws	M10	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	35.5x70x67	
Package	20	
color	Part number	Package

DKMW8		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	175A	195A
SOL wire(AWG/mm ²)	14~2/0 / 2.5~50	
STR wire(AWG/mm ²)	14~2/0 / 2.5~50	
Rated impulse voltage	8KV	
Torque(N-m)	6~12	
Screws	M8	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	32x63x132	
Package	20	
color	Part number	Package

Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
Partition plate	DKMSPS-002	50	Partition plate	DKMSPS-002	50	Partition plate	DKMSPS-002	50
Top cover	DKMC10/12	50	Top cover	DKMC10/12	50	Top cover	DKMC10/12	50
Marking label	TM28	10	Marking label	TM28	10	Marking label	TM28	10
DIN Rail	TS-35N	20	DIN Rail	TS-35N	20	DIN Rail	TS-35	20

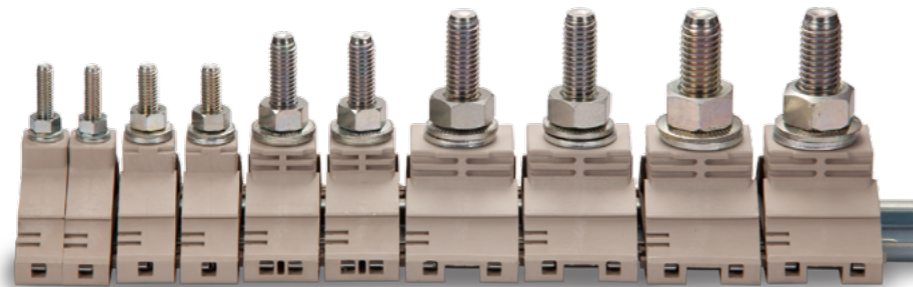

Stud Terminal Blocks

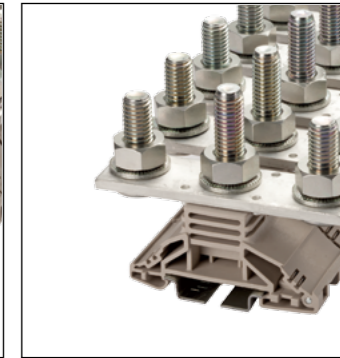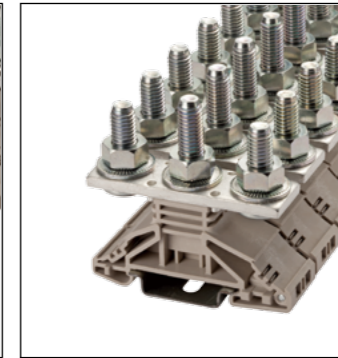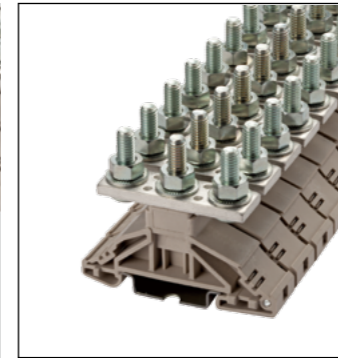

DKM series - the stud Terminal Blocks is designed specifically for safety of electricity distribution for the power industry.

DKM series is available for wire sizes from 0.5 mm² to 120mm².

Maximum of four wire lugs can be used on one stud terminal block.

Protection cover and partitions are available for higher safety requirement.

DKM

DKM6-2		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	115A	125A
SOL wire(AWG/mm ²)	14~2 / 2.5~35	
STR wire(AWG/mm ²)	14~2 / 2.5~35	
Rated impulse voltage	8KV	
Torque(N-m)	3~6	
Screws	M6	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	19.5x54x67	
Package	20	
color	Part number	Package

DKM8-2		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	150A	150A
SOL wire(AWG/mm ²)	14~1/02 / 2.5~50	
STR wire(AWG/mm ²)	14~1/02 / 2.5~50	
Rated impulse voltage	8KV	
Torque(N-m)	6~12	
Screws	M8	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	24.5x63x68	
Package	20	
color	Part number	Package


DKM10-2		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	1000V	1000V
Rated Current	255A	269A
SOL wire(AWG/mm ²)	10~250 / 6~120	
STR wire(AWG/mm ²)	10~250 / 6~120	
Rated impulse voltage	8KV	
Torque(N-m)	10~20	
Screws	M10	
Stripping length		
Insulation materials	PA	
TxHxW(mm)	35.5x70x88	
Package	10	
color	Part number	Package

Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
Partition plate	DKMSPS-002	50	Partition plate	DKMSPS-002	50	Partition plate	DKMSPS-002	50
Top cover	DKMC6	50	Top cover	DKMC8	50	Top cover	DKMC10/12	50
Marking label	TM28	10	Marking label	TM28	10	Marking label	TM28	10
DIN Rail	TS-35N	20	DIN Rail	TS-35N	20	DIN Rail	TS-35	20



Busbars Terminal Blocks

- Compact design of connection is applicable to switchgears or panels.
- Grounding busbar terminal block can be individually installed on control panels or on DIN rail using mounting bases.

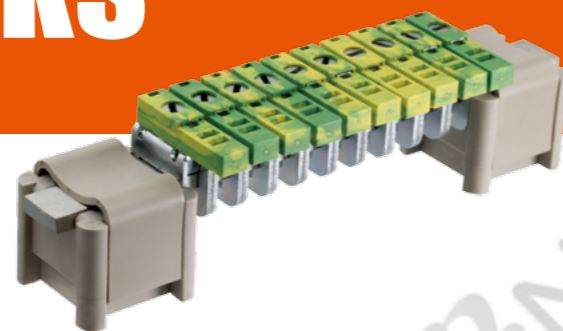

Busbars Terminal Blocks



Compact design of connection is applicable to switchgears or panels.

Grounding busbar terminal block can be individually installed on control panels or on DIN rail using mounting bases.


DKZ



DKZ4		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current	30A	41A
SOL wire(AWG/mm ²)	20~10 / 0.5~6	
STR wire(AWG/mm ²)	20~10 / 0.5~6	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x46.5	
Package	100	
Accessories(TxHxW)mm	Part number	Package
Busbar(3x10)	DKZB0310-XXXX	5
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50




DKZ4E		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x46.5	
Package	100	
Accessories(TxHxW)mm	Part number	Package
Busbar(3x10)	DKZB0310-XXXX	5
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50

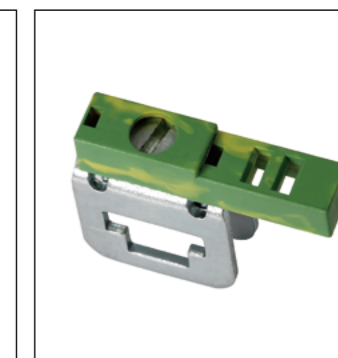


DKZ4E-YG		
Safety certification		
Specification	UL	IEC
Rated Voltage	300V	500V
Rated Current	15A	17.5A
SOL wire(AWG/mm ²)	26~14 / 0.14~1.5	
STR wire(AWG/mm ²)	26~14 / 0.14~1.5	
Rated impulse voltage	6KV	
Torque(N-m)		
Screws		
Stripping length	8mm	
Insulation materials	PA	
TxHxW(mm)	3.5x30.6x46.5	
Package	100	
Accessories(TxHxW)mm	Part number	Package
Busbar(3x10)	DKZB0310-XXXX	5
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50



DKZ16		
Safety certification 		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	14~4 / 1.5~16	
STR wire(AWG/mm ²)	14~4 / 1.5~16	
Rated impulse voltage		
Torque(N-m)	4	
Screws	M5	
Stripping length		
Insulation materials		
TxHxW(mm)	11.5x26.5x22	
Package	100	
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)	DKZB0510-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50





DKZ35		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current	115A	125A
SOL wire(AWG/mm ²)	18~2 / 0.75~35	
STR wire(AWG/mm ²)	18~2 / 0.75~35	
Rated impulse voltage		
Torque(N-m)	3	
Screws	M6	
Stripping length		
Insulation materials	12~13mm	
TxHxW(mm)	12x36.5x40	
Package	50	
Accessories(TxHxW)mm	Part number	Package
Busbar(5x15)	DKZB0515-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50

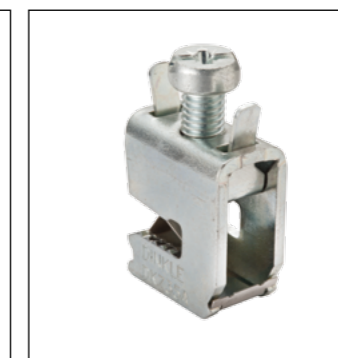

DKZ35A		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	10~2 / 4~35	
STR wire(AWG/mm ²)	10~2 / 4~35	
Rated impulse voltage		
Torque(N-m)	6	
Screws	M8	
Stripping length		
Insulation materials		
TxHxW(mm)	16x31.5x29	
Package	50	
Accessories(TxHxW)mm	Part number	Package
Busbar(5x15)	DKZB0515-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50



DKZ70A		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	4~2/0 / 16~70	
STR wire(AWG/mm ²)	4~2/0 / 16~70	
Rated impulse voltage		
Torque(N-m)	10	
Screws	M8	
Stripping length		
Insulation materials		
TxHxW(mm)	20.5x39x32	
Package	20	
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)	DKZB0510-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50






DKZ70B		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	4~2/0 / 16~70	
STR wire(AWG/mm ²)	4~2/0 / 16~70	
Rated impulse voltage		
Torque(N·m)	10	
Screws	M8	
Stripping length		
Insulation materials		
TxHxW(mm)	20.5x44x32	
Package	20	
Accessories(TxHxW)mm	Part number	Package
Busbar(10x10)	DKZB1010-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50

DKZ120		
Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)	4~250 / 16~120	
STR wire(AWG/mm ²)	4~250 / 16~120	
Rated impulse voltage		
Torque(N·m)	15	
Screws	M10	
Stripping length		
Insulation materials		
TxHxW(mm)	23.5x43x36	
Package	20	
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)	DKZB0510-XXXX	20
Busbar holder(19.4x23.4x21)	DSH1	50
Busbar holder(27x27x23.5)	DSH2	50

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(10x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		

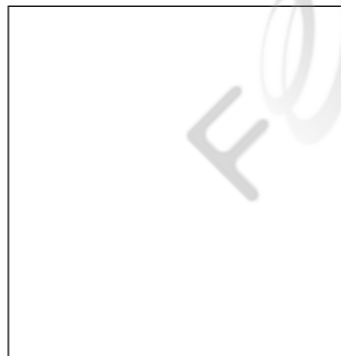


Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(10x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(10x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		


Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		
Accessories(TxHxW)mm	Part number	Package
Busbar(5x10)		
Busbar holder(19.4x23.4x21)		
Busbar holder(27x27x23.5)		

Feed-Through Panel Type Terminal Blocks

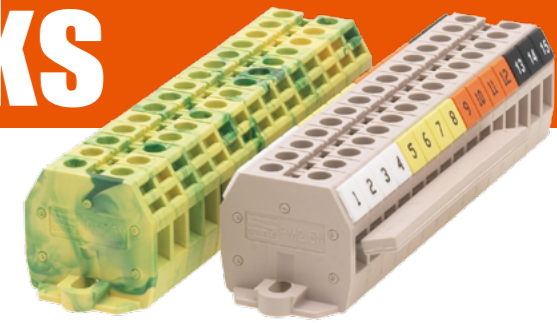

- Compact design which suitable for constrained space installation.
- Easy installation, high reliability of wiring, loosen-proof mechanism against vibration, wide contact area.
- Suitable for wire size from 0.34mm² up to 6mm².
- Accessories including marking labels, bridges, and partition plates, that can meet various requirements.

Feed-Through Panel Type Terminal Blocks




Compact design which is suitable for constrained space installation.

Easy installation, high reliability of wiring, loosens-proof mechanism against vibration, wide contact area.

Suitable for wire sizes from 0.34mm² to 6mm². Accessories including marking labels, bridges, and partition plates, that can meet various requirements.

IEC 60947-7-1 & UL 1059 compliance.

PM..N

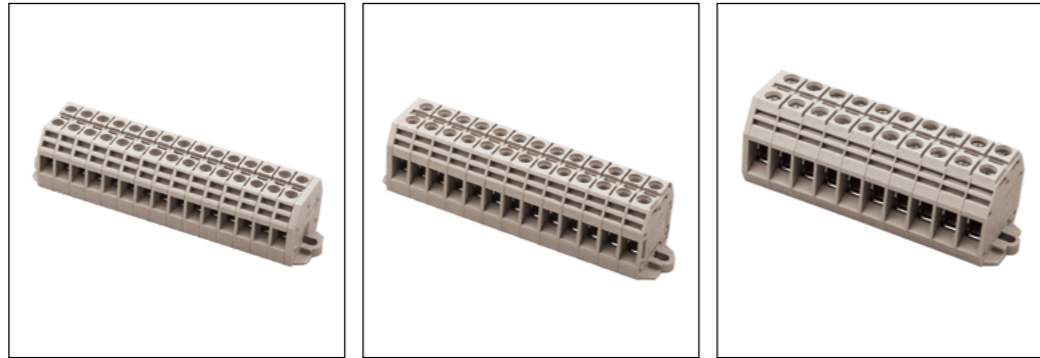


PM2.5N			PM4N			PM6N		
Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	300V	500V	Rated Voltage	300V	500V	Rated Voltage	300V	500V
Rated Current	20A	24A	Rated Current	30A	32A	Rated Current	65A	41A
SOL wire(AWG/mm ²)	22~12 / 0.34~4		SOL wire(AWG/mm ²)	20~10 / 0.5~6		SOL wire(AWG/mm ²)	20~6 / 0.5~10	
STR wire(AWG/mm ²)	22~12 / 0.34~2.5		STR wire(AWG/mm ²)	20~10 / 0.5~6		STR wire(AWG/mm ²)	20~6 / 0.5~6	
Rated impulse voltage	6KV		Rated impulse voltage	6KV		Rated impulse voltage	6KV	
Torque(N·m)	0.39		Torque(N·m)	0.49		Torque(N·m)	1.18	
Screws	M2.5		Screws	M3		Screws	M4	
Stripping length	6~8mm		Stripping length	6~8mm		Stripping length	9~11mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	5.1x20x22		TxHxW(mm)	6.1x23x22		TxHxW(mm)	8x29.8x30	
Package	100		Package	100		Package	100	

color	Part number	Package	color	Part number	Package	color	Part number	Package
●	PM2.5N-01P~12P-OR	50	●	PM4N-01P~12P-OR	50	●	PM6N-01P~09P-OR	50
							PM6N-10P~12P-OR	20
●	PM2.5NG-01P~12P	50	●	PM4NG-01P~12P	50	●	PM6NG-01P~09P	50
							PM6NG-10P~12P	20


Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
End cover	PM2.5NC	50	End cover	PM4NC	50	End cover	PM6NC	50
2 way Insertion bridge	CSC-2.502PS	50	2 way Insertion bridge	CSC-402PS	50	2 way Insertion bridge	CSC-602PS	50
3 way Insertion bridge	CSC-2.503PS	50	3 way Insertion bridge	CSC-403PS	50	3 way Insertion bridge	CSC-603PS	50
4 way Insertion bridge	CSC-2.504PS	50	4 way Insertion bridge	CSC-404PS	50	4 way Insertion bridge	CSC-604PS	50
5 way Insertion bridge	CSC-2.505PS	10	5 way Insertion bridge	CSC-405PS	10	5 way Insertion bridge	CSC-605PS	10
10 way Insertion bridge	CSC-2.510PS	10	10 way Insertion bridge	CSC-410PS	10	10 way Insertion bridge	CSC-610PS	10
Mounting base	PMH	50	Mounting base	PMH	50	Mounting base	PMH	50
Marking label	TM20	10	Marking label	TM21	10	Marking label	TM28	10

Pole	Part number	Package	Pole	Part number	Package	Pole	Part number	Package
01P	PM2.5N-01P	50	01P	PM4N-01P	50	01P	PM6N-01P	50
02P	PM2.5N-02P	50	02P	PM4N-02P	50	02P	PM6N-02P	50
03P	PM2.5N-03P	50	03P	PM4N-03P	50	03P	PM6N-03P	50
:	:	:	:	:	:	:	:	:

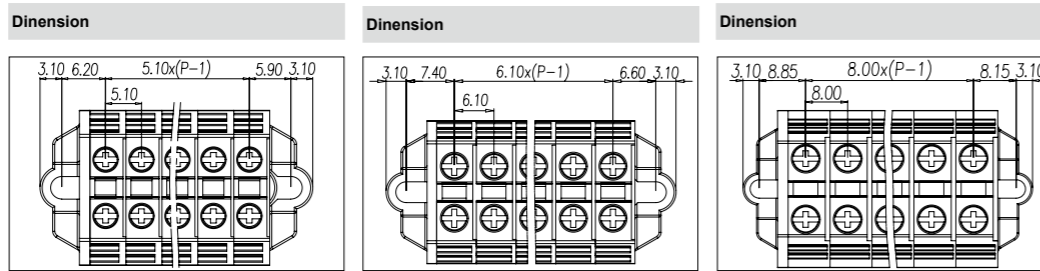

Assembled blocks	End cover	Single block	End cover with spring clamp
PM2.5N-XXP	PM2.5NC	PM2.5N	-
PM4N-XXP	PM4NC	PM4N	-
PM6N-XXP	PM6NC	PM6N	-

Feed-Through Panel Type Terminal Blocks



Compact design for panel mounting by flanges.


Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.

PM..WS

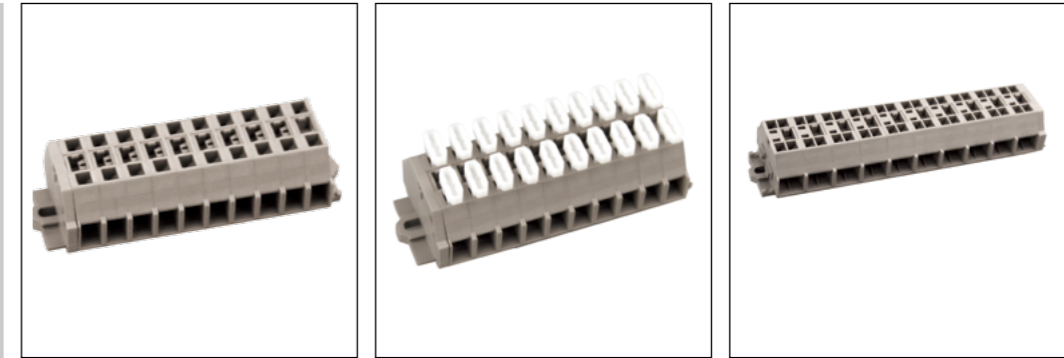


PM2.5WS			PM2.5WSA			PMM2.5WS		
Safety certification			Safety certification			Safety certification		
Specification	UL	IEC	Specification	UL	IEC	Specification	UL	IEC
Rated Voltage	600V	630V	Rated Voltage	600V	630V	Rated Voltage	600V	630V
Rated Current	25A	24A	Rated Current	25A	24A	Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5		SOL wire(AWG/mm ²)	28~12 / 0.5~2.5		SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5		STR wire(AWG/mm ²)	14~12 / 0.5~2.5		STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV		Rated impulse voltage	8KV		Rated impulse voltage	8KV	
Torque(N·m)			Torque(N·m)			Torque(N·m)		
Screws			Screws			Screws		
Stripping length	7~8mm		Stripping length	7~8mm		Stripping length	7~8mm	
Insulation materials	PA		Insulation materials	PA		Insulation materials	PA	
TxHxW(mm)	6x28x18		TxHxW(mm)	6x28x18		TxHxW(mm)	10x28x18	
Package	100		Package	100		Package	100	

color	Part number	Package	color	Part number	Package	color	Part number	Package
●	PM2.5WS-01P~12P-OR	50	●	PM2.5WSA-01P~12P-OR	50	●	PMM2.5WS-01P~11P-OR	50
							PMM2.5WS-12P-OR	50
●	PM2.5WS-01P~12P-YG	50	●	PM2.5WSA-01P~12P-YG	50	●	PMM2.5WS-01P~12P-YG	50
							PMM2.5WS-12P-OR	50


Accessories	Part number	Package	Accessories	Part number	Package	Accessories	Part number	Package
End cover	PM2.5WSC	50	End cover	PM2.5WSC	50	End cover	PM2.5WSC	50
2 way Insertion bridge	DS-204	50	2 way Insertion bridge	DS-204	50	2 way Insertion bridge	DS-204	50
Mounting base	PMH	50	Mounting base	PMH	50	Mounting base	PMH	50
Marking label	TM20	10	Marking label	TM20	10	Marking label	TM20	10
Tool	0.4x2.5mm	/	Tool	/	/	Tool	/	/

Pole	Part number	Package	Pole	Part number	Package	Pole	Part number	Package
01P	PM2.5WS-01P	50	01P	PM2.5WSA-01P	50	01P	PMM2.5WS-01P	50
02P	PM2.5WS-02P	50	02P	PM2.5WSA-02P	50	02P	PMM2.5WS-02P	50
03P	PM2.5WS-03P	50	03P	PM2.5WSA-03P	50	03P	PMM2.5WS-03P	50
:	:	:	:	:	:	:	:	:

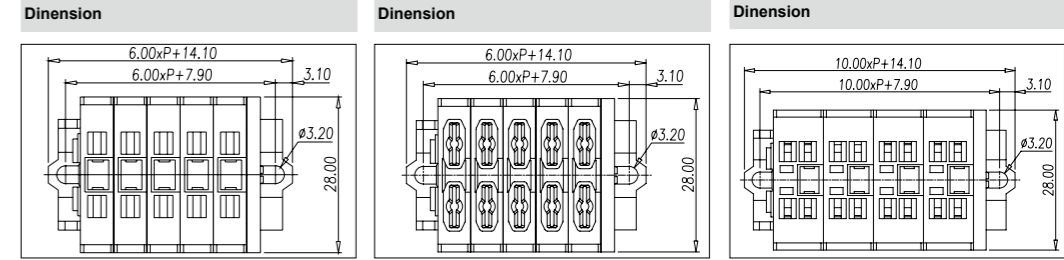

Assembled blocks	End cover	Single block	End cover with spring clamp
PM2.5WS-XXP	PM2.5WSC	PM2.5WS	-
PM2.5WSA-XXP	PMWSC	PM2.5WSA	-
PMM2.5WS-XXP	PMWSC	PMM2.5WS	-
PMM2.5WSA-XXP	PMWSC	PMM2.5WSA	-

Feed-Through Panel Type Terminal Blocks



Compact design for panel mounting by flanges.

Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.

PM..WS




PMM2.5WSA		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	7~8mm	
Insulation materials	PA	
TxHxW(mm)	10x28x18	
Package	100	

color	Part number	Package
●	PMM2.5WSA-01P~11P-OR	50
	PMM2.5WSA-12P-OR	20
●	PMM2.5WSA-01P~11P-YG	50
	PMM2.5WSA-12P-YG	20

Accessories	Part number	Package
	PM2.5WSC	50
	DS-204	50
	PMH	50

Pole	Part number	Package
01P	PM2.5WSA-01P	50
02P	PM2.5WSA-02P	50
03P	PM2.5WSA-03P	50
:	:	:
:	:	:

Dimension




PMM2.5WSA		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	7~8mm	
Insulation materials	PA	
TxHxW(mm)	10x28x18	
Package	100	

color	Part number	Package
●	PMM2.5WSA-01P~11P-OR	50
	PMM2.5WSA-12P-OR	20
●	PMM2.5WSA-01P~11P-YG	50
	PMM2.5WSA-12P-YG	20

Accessories	Part number	Package
	PM2.5WSC	50
	DS-204	50
	PMH	50

Pole	Part number	Package
01P	PM2.5WSA-01P	50
02P	PM2.5WSA-02P	50
03P	PM2.5WSA-03P	50
:	:	:
:	:	:

Dimension



PMM2.5WSA		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	7~8mm	
Insulation materials	PA	
TxHxW(mm)	10x28x18	
Package	100	

color	Part number	Package
●	PMM2.5WSA-01P~11P-OR	50
	PMM2.5WSA-12P-OR	20
●	PMM2.5WSA-01P~11P-YG	50
	PMM2.5WSA-12P-YG	20

Accessories	Part number	Package
	PM2.5WSC	50
	DS-204	50
	PMH	50

Pole	Part number	Package
01P	PM2.5WSA-01P	50
02P	PM2.5WSA-02P	50
03P	PM2.5WSA-03P	50
:	:	:
:	:	:

Dimension



Feed-Through Panel Type Terminal Blocks



Compact design for panel mounting by flanges.

Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.

PM..WSH





PM2.5WSH		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	6x28x18	
Package	100	

color	Part number	Package
●	PM2.5WSH-01P~12P-OR	50
●	PM2.5WSH-01P~12P-YG	50

Accessories	Part number	Package
(left)	PM2.5WSHC	50
(right)	PM2.5WSHCB	50
2 way	DS-204	50
	TM20	10
	0.4x2.5mm	/

Pole	Part number	Package
01P	PM2.5WSH-01P	50
02P	PM2.5WSH-02P	50
03P	PM2.5WSH-03P	50
:	:	:
:	:	:

Dimension

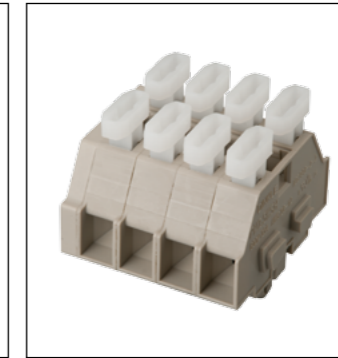



PM2.5WSHA		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	7~8mm	
Insulation materials	PA	
TxHxW(mm)	6x28x18	
Package	100	

color	Part number	Package
●	PM2.5WSHA-01P~12P-OR	50
●	PM2.5WSHA-01P~12P-YG	50

Accessories	Part number	Package
	PM2.5WSHC	50
	PM2.5WSHACB	50
	DS-204	50
	TM20	10
	0.4x2.5mm	/

Pole	Part number	Package
01P	PM2.5WSH-01P	50
02P	PM2.5WSH-02P	50
03P	PM2.5WSH-03P	50
:	:	:
:	:	:

Dimension

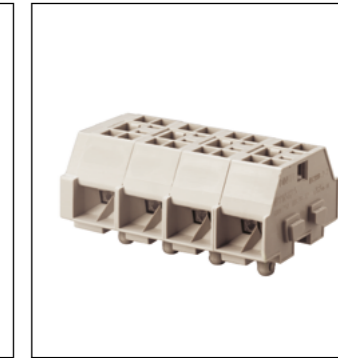


PMM2.5WSH		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	10x28x18	
Package	50	

color	Part number	Package
●	PMM2.5WSH-01P~10P-OR	50
	PMM2.5WSH-11P~12P-OR	20
●	PMM2.5WSH-01P~10P-YG	50
	PMM2.5WSH-11P~12P-YG	50

Accessories	Part number	Package
	PM2.5WSHC	50
	PMM2.5WSHACB	50
	DS-204	50
	TM20	10
	0.4x2.5mm	/

Pole	Part number	Package
01P	PM2.5WSH-01P	50
02P	PM2.5WSH-02P	50
03P	PM2.5WSH-03P	50
:	:	:
:	:	:

Dimension



Assembled blocks	End cover	Single block	End cover with spring clamp
PM2.5WSH-XXP	PM2.5WSHC	PM2.5WSH	PM2.5WSHCB
PM2.5WSHA-XXP	PM2.5WSHC	PM2.5WSHA	PM2.5WSHACB
PMM2.5WSH-XXP	PM2.5WSHC	PMM2.5WSH	PMM2.5WSHACB
PMM2.5WSHA-XXP	PM2.5WSHC	PMM2.5WSHA	PMM2.5WSHACB

Feed-Through Panel Type Terminal Blocks



Compact design for panel mounting by flanges.

Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.

PM..WSH


PMM2.5WSHA		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	630V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	7~8mm	
Insulation materials	PA	
TxHxW(mm)	10x28x18	
Package	100	

color	Part number	Package
●	PMM2.5WSHA-01P-08P-OR	50
	PMM2.5WSHA-09P-12P-OR	50
●	PMM2.5WSHA-01P-08P-YG	50
	PMM2.5WSHA-09P-12P-YG	50

Accessories	Part number	Package
End cover (left)	PM2.5WSHC	50
End cover (right)	PMM2.5WSHCB	50
Insertion bridge	2 way DS-204	50
Mounting base		
Marking label	TM20	10
Tool	0.4x2.5mm	/

Pole	Part number	Package
01P	PMM2.5WSHA-01P	50
02P	PMM2.5WSHA-02P	50
03P	PMM2.5WSHA-03P	50
:	:	
:	:	

Dimension



Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package

Accessories	Part number	Package

Pole	Part number	Package

Dimension




Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N-m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package




Accessories	Part number	Package

Pole	Part number	Package

Dimension



Feed-Through Panel Type Terminal Blocks

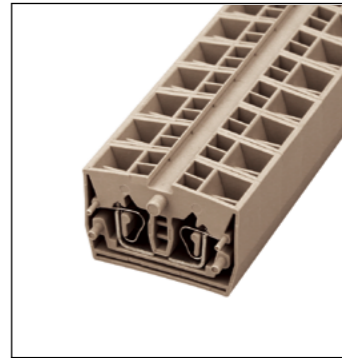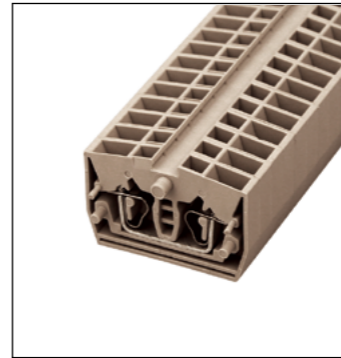

Compact design for panel mounting by flanges.

Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.


PM..W

PM2.5W		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x32x22	
Package	100	

color	Part number	Package
●	PM2.5W-02P-12P-RD	50
●	PM2.5W-02P-12P-BL	50
●	PM2.5W-02P-12P-YG	50

Accessories	Part number	Package
End cover (left)	PM2.5WCA	50
End cover (right)	PM2.5WCB	50
Insertion bridge	2 way CSC-2.502PS	50
Mounting base		
Marking label	TM20	10
Tool	0.4x2.5mm	/

Dimension







PMM2.5W		
Safety certification		
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N-m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	10x32x22	
Package	100	





color	Part number	Package
●	PMM2.5W-02P-11P-RD	50
	PMM2.5W-12P-RD	20
●	PMM2.5W-02P-11P-BL	50
	PMM2.5W-12P-BL	20
●	PMM2.5W-02P-11P-YG	50
	PMM2.5W-12P-YG	20

Accessories	Part number	Package
End cover (left)	PMM2.5WCA	50
End cover (right)	PMM2.5WCB	50
Insertion bridge		
Mounting base		
Marking label	TM20	10
Tool	0.4x2.5mm	/

Dimension



Assembled blocks	End cover	Single block	End cover with spring clamp
PM2.5W-XXP	PM2.5WCA	PM2.5W	PM2.5WCB
PMM2.5W-XXP	PMM2.5WCA	PMM2.5W	PMM2.5WCB

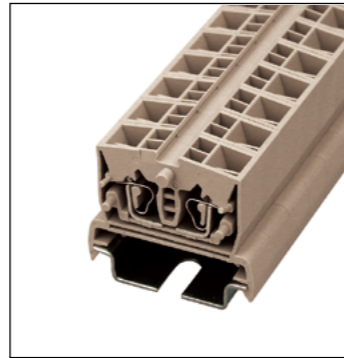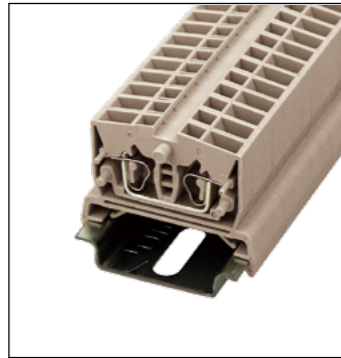

Compact design for panel mounting by flanges.

Spring clamp design wiring structure for anti-vibration.

Standard 2 & 4 wirings per connection points are available.

Available accessories include insertion bridges and marking labels.

Design is compliant with IEC 60947-4-1 and UL 1059.

AK..P

AK2.5P		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	5.1x31.4x38	
Package	50	


AK2.5PP		
Safety certification	UL IEC	
Specification	UL	IEC
Rated Voltage	600V	800V
Rated Current	25A	24A
SOL wire(AWG/mm ²)	28~12 / 0.5~2.5	
STR wire(AWG/mm ²)	14~12 / 0.5~2.5	
Rated impulse voltage	8KV	
Torque(N·m)		
Screws		
Stripping length	8~10mm	
Insulation materials	PA	
TxHxW(mm)	10x31.4x38	
Package	50	

Safety certification		
Specification	UL	IEC
Rated Voltage		
Rated Current		
SOL wire(AWG/mm ²)		
STR wire(AWG/mm ²)		
Rated impulse voltage		
Torque(N·m)		
Screws		
Stripping length		
Insulation materials		
TxHxW(mm)		
Package		

color	Part number	Package
●	AK2.5P-RD	50
●	AK2.5P-BL	50
●	AK2.5P-YG	50
Accessories	Part number	Package
	AK2.5PC	50
2 way	CSC-2.502P	50
	TM20	10
	TS-35N	20
	0.4x2.5mm	/

color	Part number	Package
●	AK2.5P-RD	50
●	AK2.5P-BL	50
●	AK2.5P-YG	50
Accessories	Part number	Package
	AK2.5PC	50
	C000007000	50
	TM20	10
	TS-35N	20
	0.4x2.5mm	/


color	Part number	Package
Accessories	Part number	Package





Assembled blocks	End cover	Single block	End cover with spring clamp
AK2.5P-XXP	AK2.5PC	AK2.5P	-
AK2.5PP-XXP	AK2.5PC	AK2.5P	-

Accessories



- DIN rail terminal blocks offer full range of accessories. Cover, end bracket and partition plate for easy system building.
- The marking block helps to save space directly on terminal block.
- Cross connection system includes plug-in and side insertion bridges.
- Functional plugs are available for use in the disconnection terminal block.

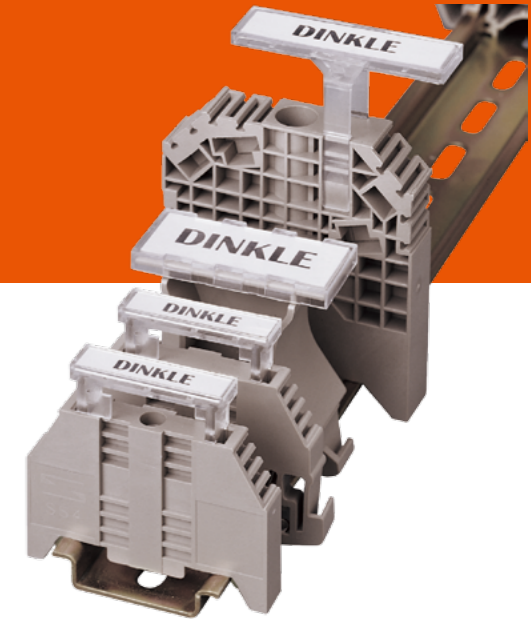

End Bracket

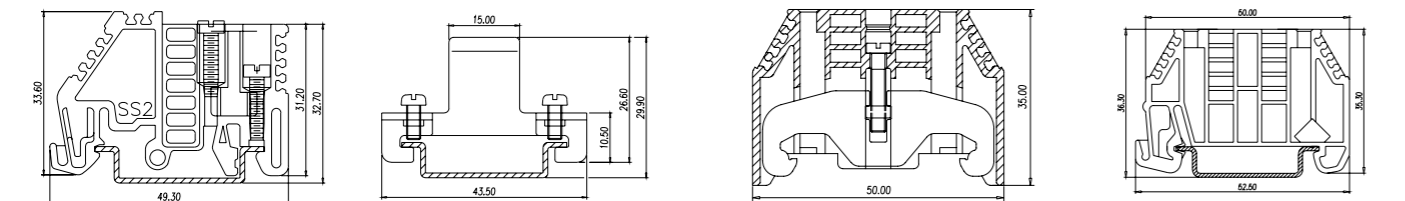
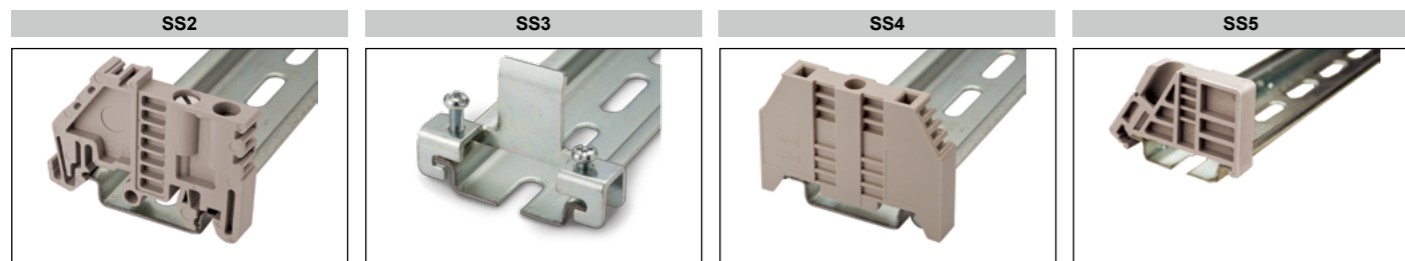


Part number	DIN Rail	Marking label	package
SS2	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS, TS-32	TM21, TM27	50
SS3	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	..	50
SS4	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	TM28	50
SS5	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	TM28	50

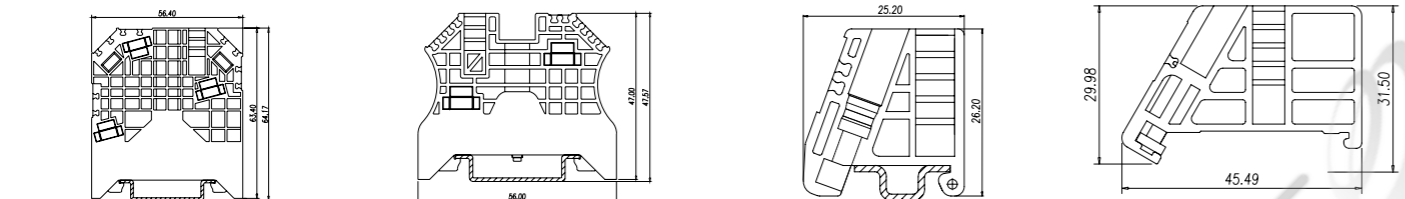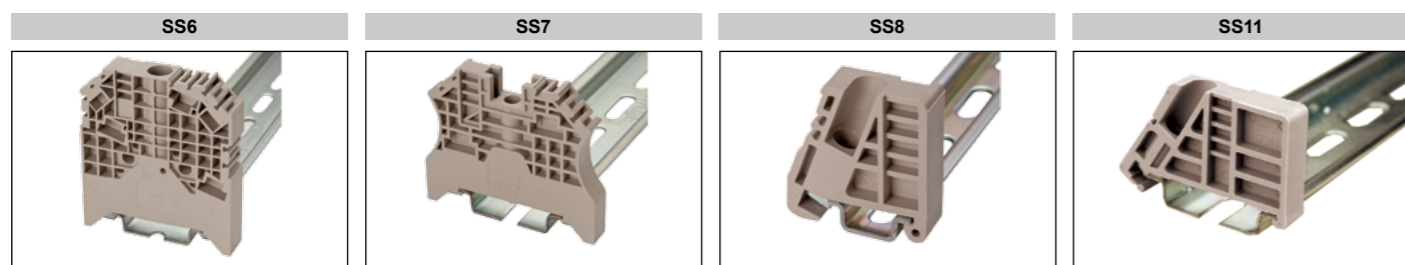



Part number	DIN Rail	Marking label	package
SS6	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	TM28	50
SS7	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	TM28, TM21	50
SS8	TS-15	TM28	50
SS11	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	TM28	50

Marking Block

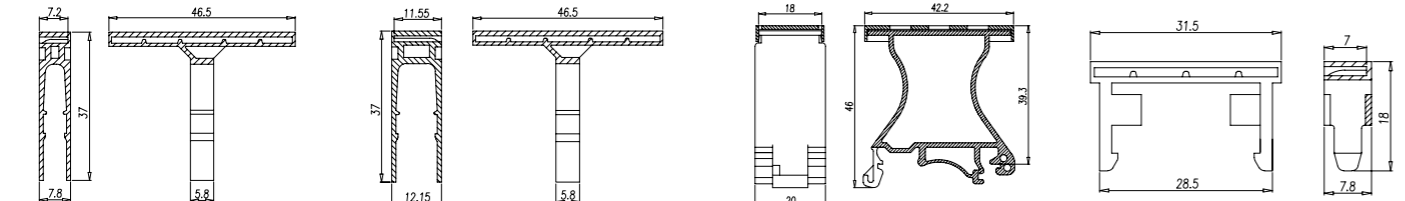
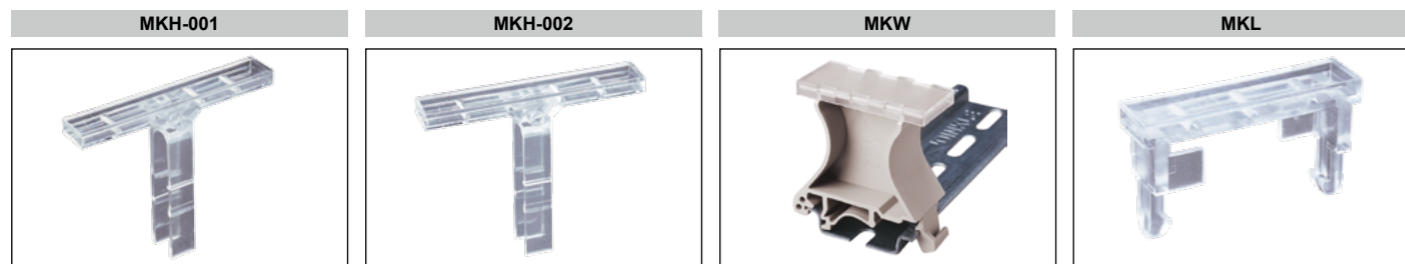


Part number	DIN Rail	package
MKH-001	SS2, SS4, SS5, SS7, SS8, SS11	50
MKH-002	SS6	50
MKW	TS-35, TS-35N, TS-35NS, TS-35/15, TS-35/15N, TS-35/15NS	20
MKL	SS4, SS5	100

Partition Plate

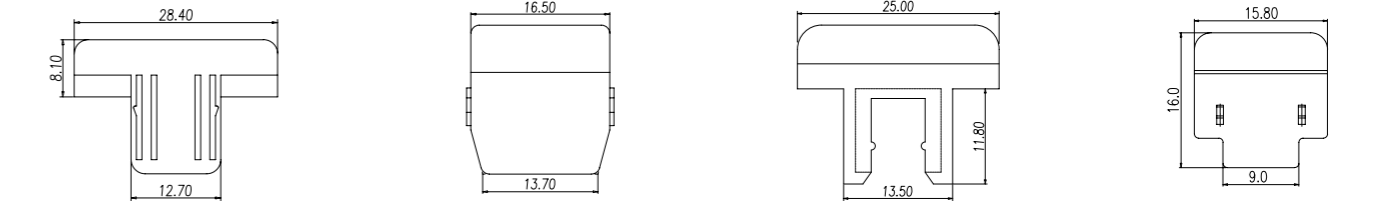
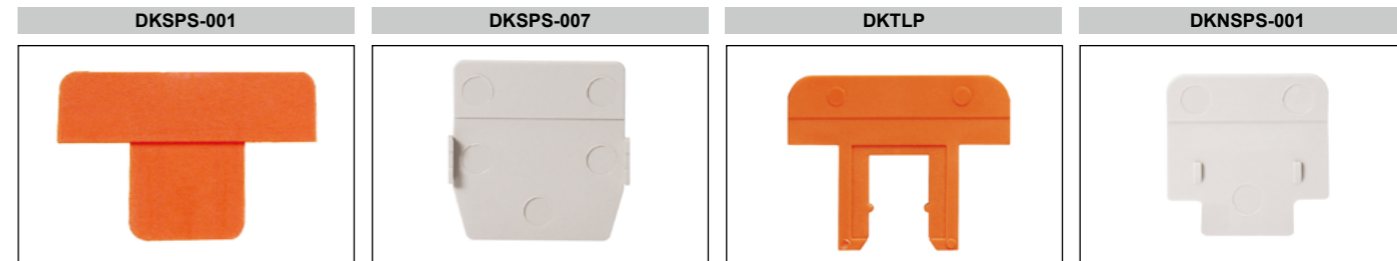


Part number	DIN Rail	package
DKSPS-001	DK2.5, DK4, DK6, DK10	50
DKSPS-007	DK4-TR	50
DKTLP	DK2.5, DK4, DK6, DK10	50
DKNSPS-001	DK2.5N, DK4N	50

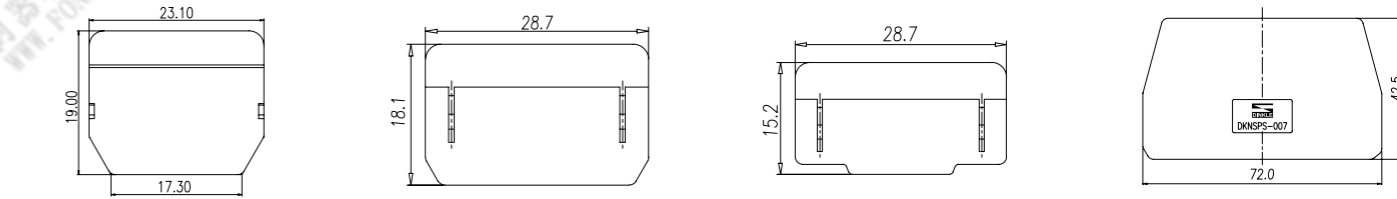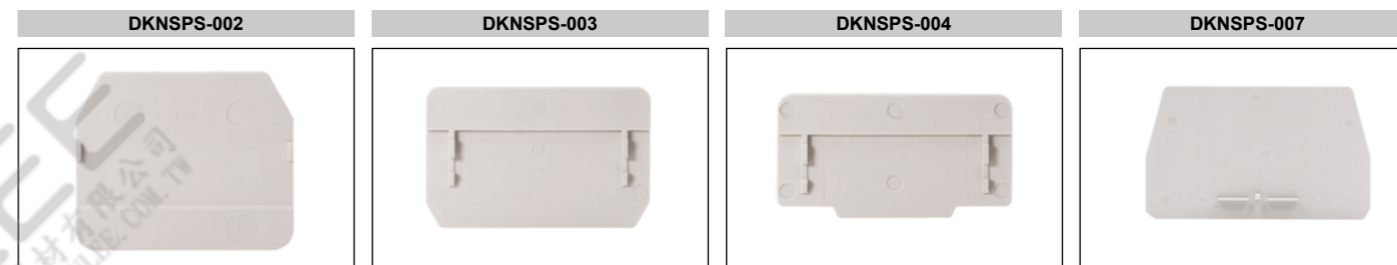



Part number	DIN Rail	package
DKNSPS-002	DK6N, DK10N	50
DKNSPS-003	DK16N, DK16H	50
DKNSPS-004	DK35N, DK35H	50
DKNSPS-007	DKTD6N	50

Partition Plate

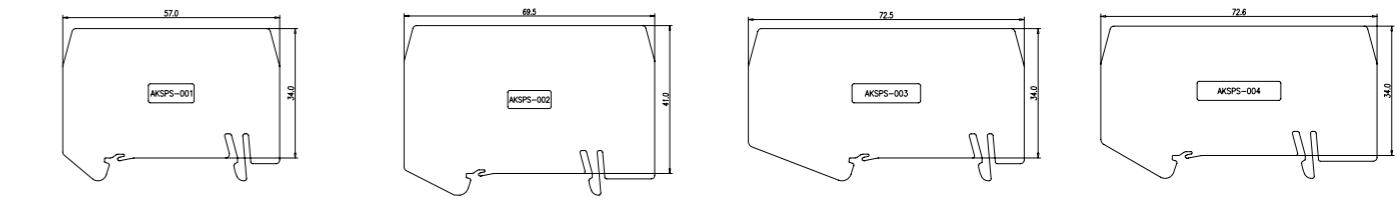
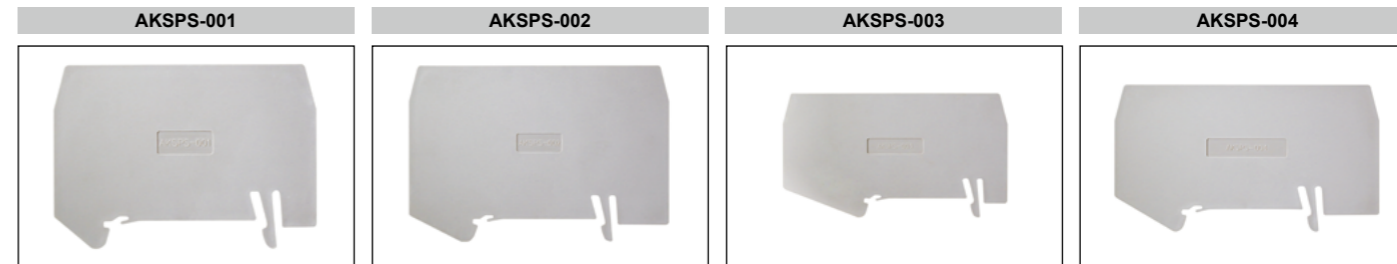


Part number	DIN Rail	package
AKSPS-001	AK1.5, AK2.5, AK4, DP1.5, DP2.5, DP4	50
AKSPS-002	AK6, DP6	50
AKSPS-003	AK1.5-TN, AK2.5-TN, AK4-TN, AK2.5-TP, AK4-TP, AK2.5-TG, AK4-TG, AK2.5-CP, AK4-CP, AK4-TF(5X20), DP2.5-TN, DP4-TN	20
AKSPS-004	AK1.5-TR, AK2.5-TR, AK2.5-TN-TP, AK2.5-TN-TG, DP2.5-TR, DP4-TR	100

Partition Plate

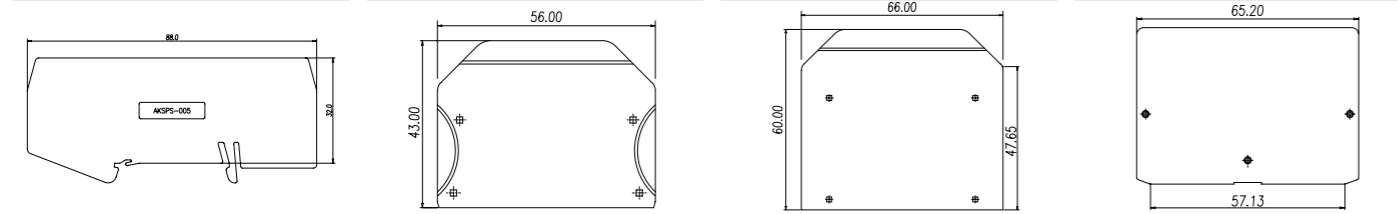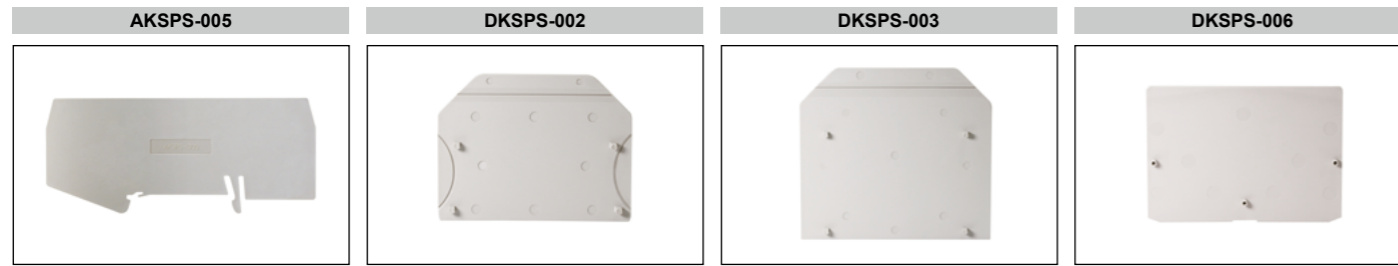


Part number	DIN Rail	package
AKSPS-005	AK4-TR	50
DKSPS-002	DK2.5, DK4, DK6, DK10, DK2.5-TG	50
DKSPS-003	..	50
DKSPS-006	DKTL6, DKTD6	50

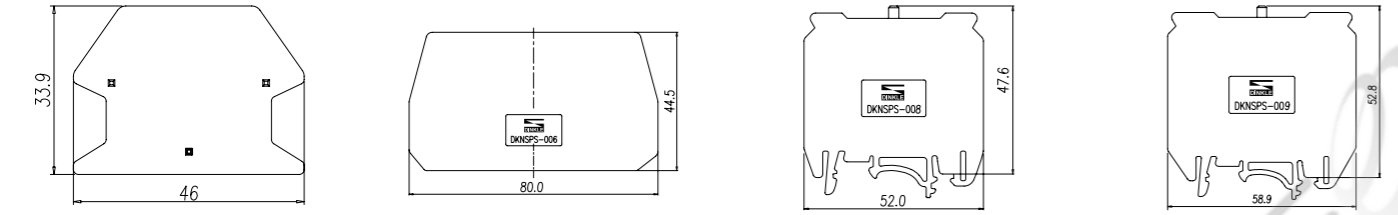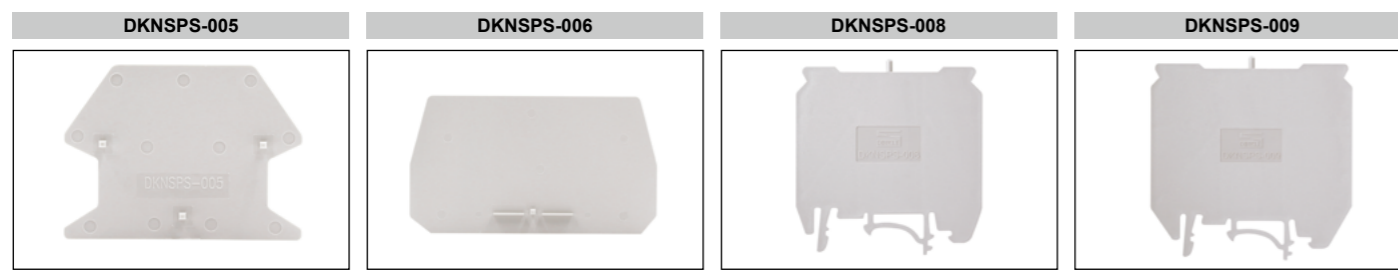



Part number	DIN Rail	package
DKNSPS-002	DK2.5N, DK-4N	50
DKNSPS-003	DKTD6N	50
DKNSPS-004	DK2.5N, DK4N, DK6N	50
DKNSPS-007	DK10N, DK16N	50

Cover

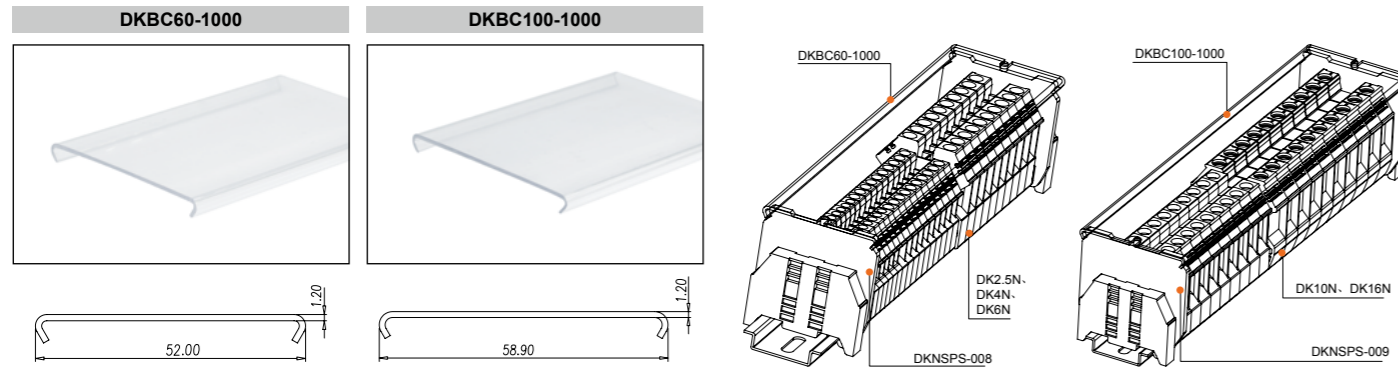


Part number	DIN Rail	package
DKBC60-1000	DKNSPS-008	20
DKBC100-1000	DKNSPS-009	20


Cover

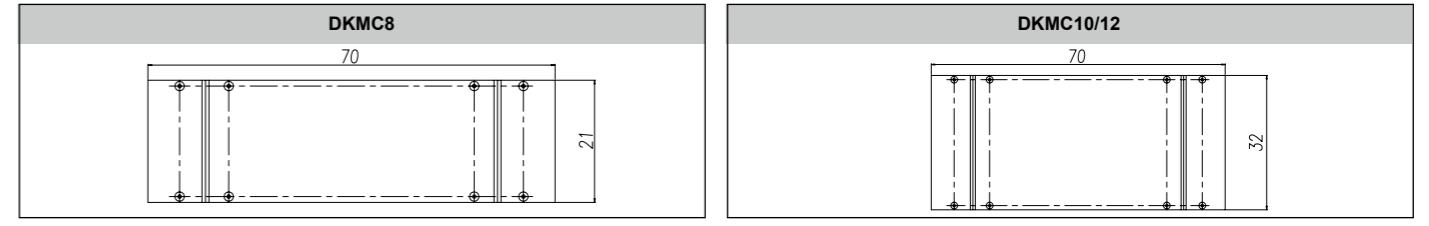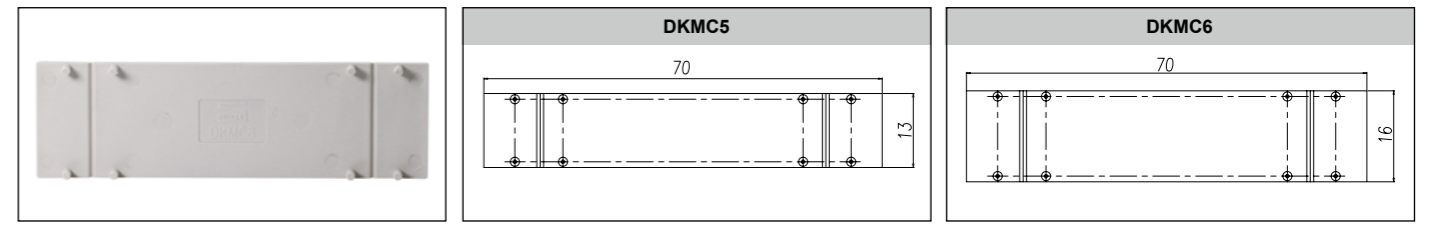

Part number	DIN Rail	package
DKMC5	DKM5	50
DKMC6	DKM6, DKM6-2	50
DKMC8	DKM8, DKM8-2	50
DKMC10/12	DKM10, DKM12, DKM10-2	50

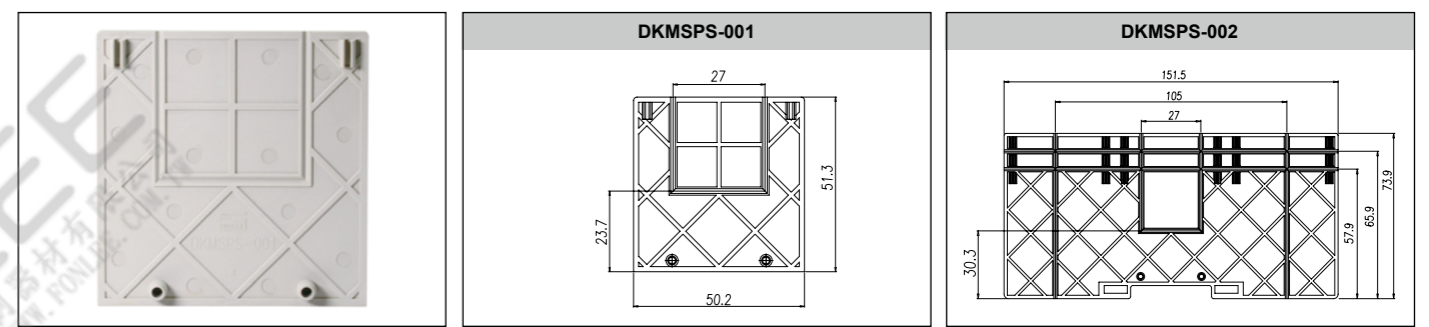


Part number	DIN Rail	package
DKMSPS-001	DKM5, DKM6	50
DKMSPS-002	DKM8, DKM10, DKM12, DKM6-2, DKM8-2, DKM10-2	50

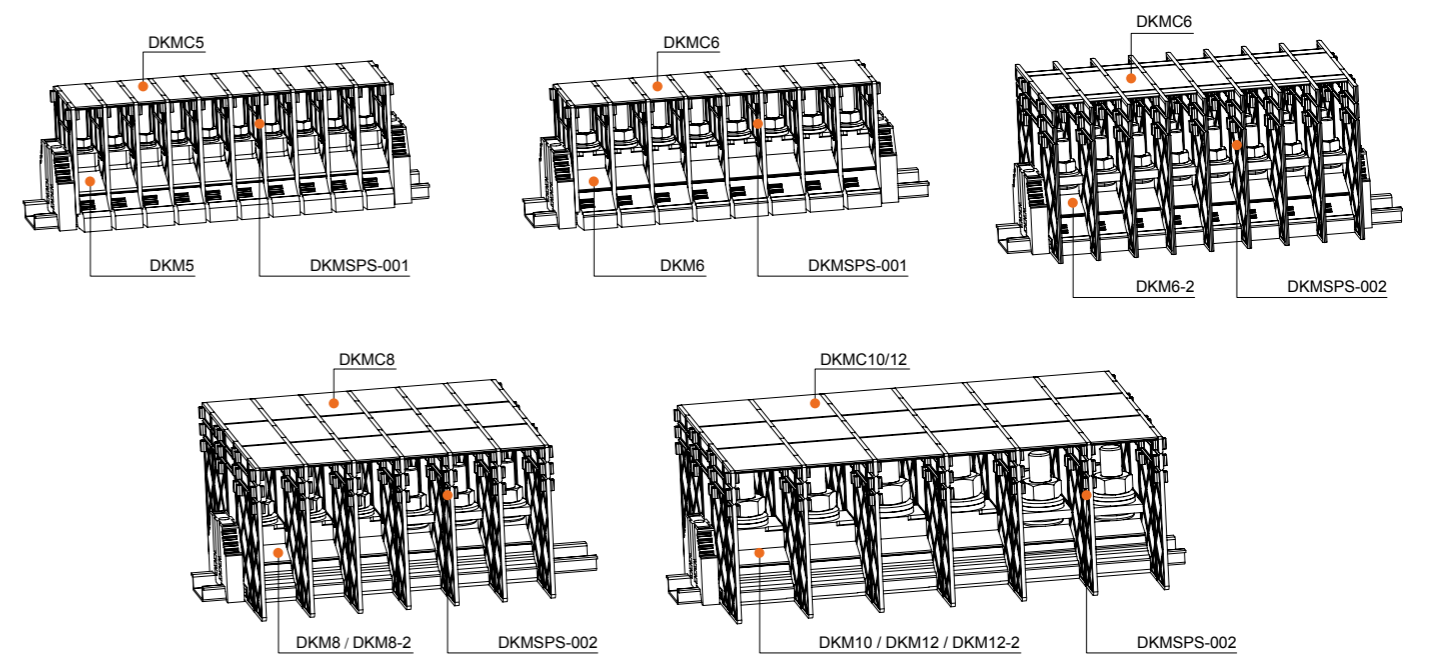


Accessories



Cross Connection System

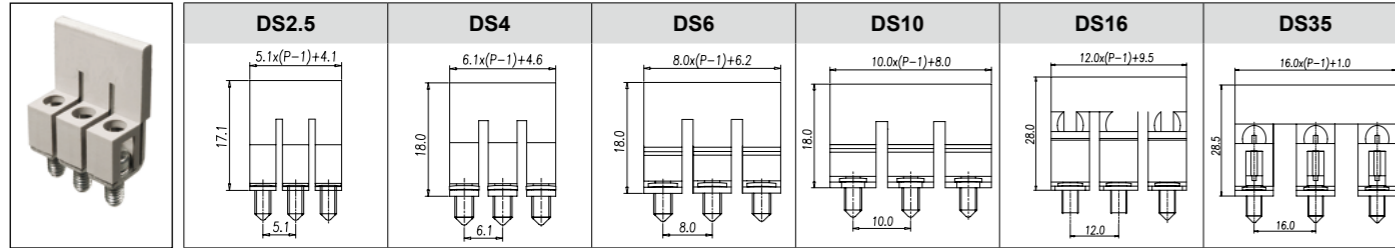

Part number	Position	For	package
DS2.5	02~10	DK2.5, DKK2.5, DK1.5-TR, DKES1.5	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DS4	02~10	DK4, DKK4, DK4-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DS6	02~10	DK6, DKTD6, DKTL6	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DS10	02~10	DK10	10Pcs / Pkt
DS16	02~10	DK16H, DK16, DK10-TF(5x20), DK10-TFA(5x20)	10Pcs / Pkt
DS35	02~10	DK35H, DK35	10Pcs / Pkt

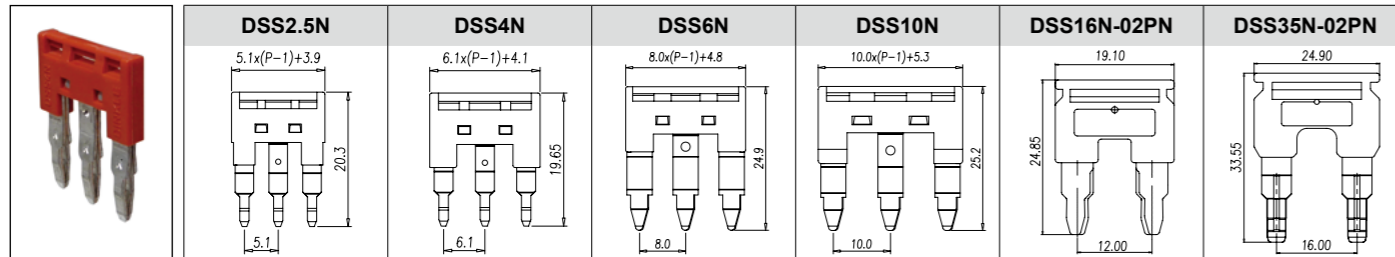


Part number	Position	For	package
DSS2.5N-XXP	02~10	DK2.5N, DK2.5N-TN, DK2.5N-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSS4N-XXP	02~10	DK4N, DK4N-TN, DK4N-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSS6N-XXP	02~10	DK6N	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSS10N-XXP	02~10	DK10N	10Pcs / Pkt
DSS16N-02PN	02~10	DK16N	10Pcs / Pkt
DSS35N-02PN	02~10	DK35N	10Pcs / Pkt

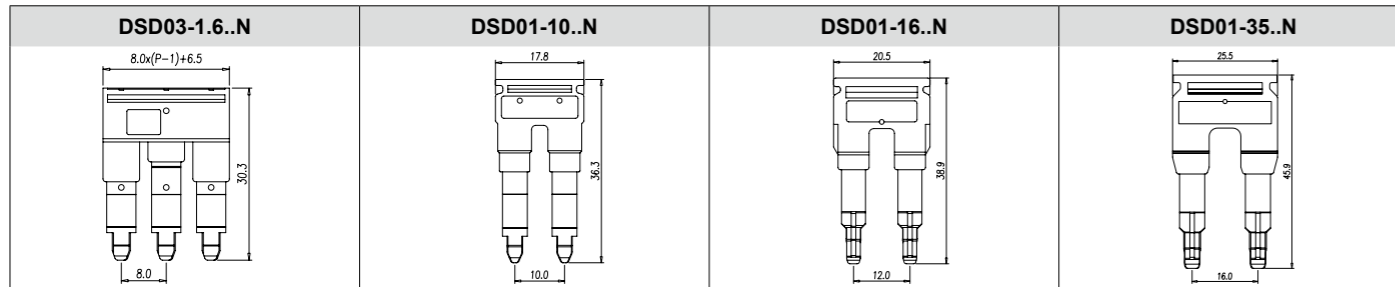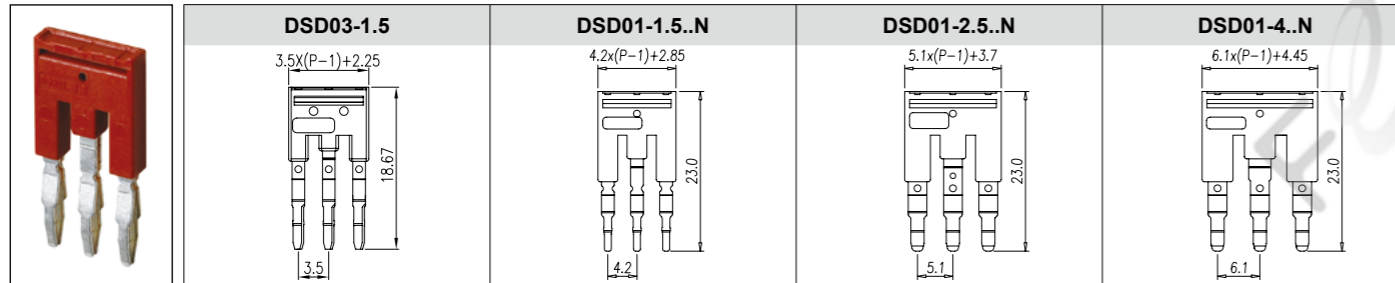


Part number	Position	For	package
DSD03-1.5	02~10	DP1.5, DP1.5-TR, DP1.5-TN	50Pcs / Pkt
DSD01-1.5XXN	02~10	AK1.5, AK1.5-TN, AK1.5-TR, AKK1.5	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD01-2.5XXN	02~10	AK2.5, AK2.5-TN, AK2.5-TR, AK2.5-TP, AK2.5-TN-TP, AK2.5-TR-TP, AK2.5-TG, AK2.5-TN-TG, AK2.5-CP, AK2.5-TN-CP, AK2.5-TR-CP, AKK2.5, AKK2.5-D01, AKK2.5-D02, AKK2.5-D03, AKK2.5-D04, AKK2.5-PV, DP2.5, DP2.5-TN, DP2.5-TR, DPP2.5	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD01-4XXN	02~10	AK4, AK4-TN, AK4-TR, AKK4, AK4-TP, AK4-TG, AK4-CP, AK4-TF(5x20), DP4, DP4-TN, DP4-TR, DPP4	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD01-6XXN	02~10	AK6, AK6-TN, AK6-TR, DP6, DP6-TN, DP6-TR	10Pcs / Pkt
DSD01-1002N	02~10	AK10, AK10-TN, DP10	10Pcs / Pkt
DSD01-1602N	02~10	AK16, AK16-TN	10Pcs / Pkt
DSD01-3502N	02~10	AK35	10Pcs / Pkt



Cross Connection System

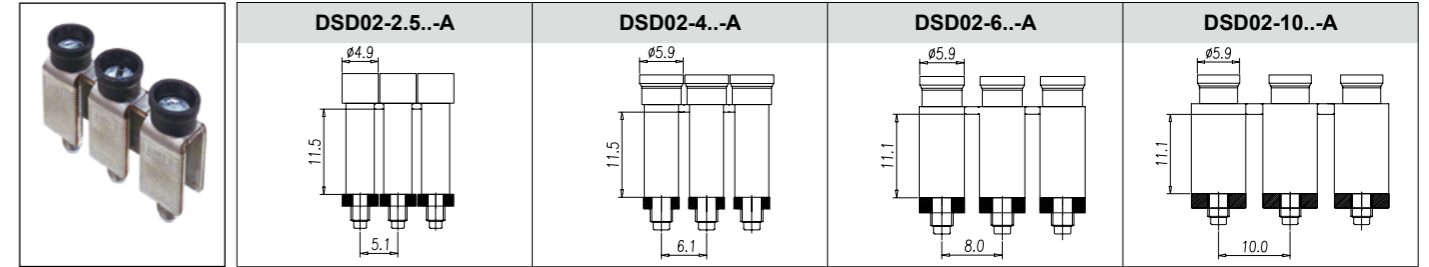

Part number	Position	For	package
DSD02-2.5XX-A	02~10	DK2.5, DK1.5-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-4XX-A	02~10	DK4	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-6XX-A	02~10	DK6	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-10XX-A	02~10	DK10	10Pcs / Pkt

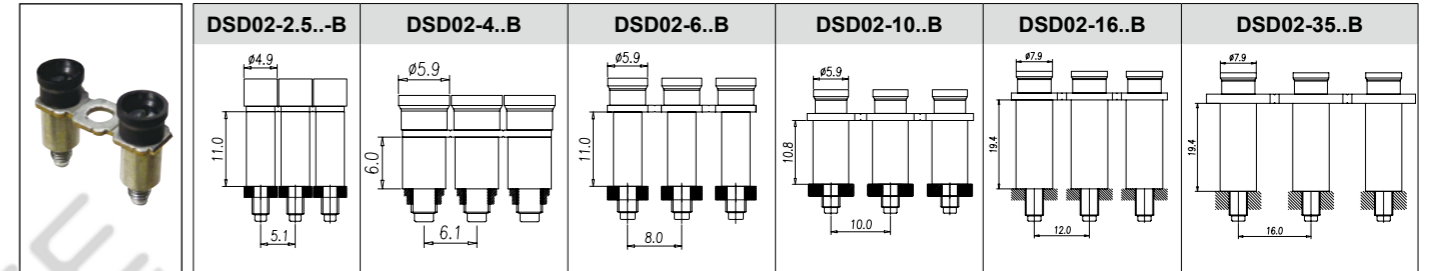


Part number	Position	For	package
DSD02-2.5XX-B	02~10	DK2.5, DK1.5-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-4XX-B	02~10	D3KS2.5	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-6XX-B	02~10	DK6	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-10XX-B	02~10	DK10	10Pcs / Pkt
DSD02-16XX-B	02~10	DK16, DK16H	10Pcs / Pkt
DSD02-35XX-B	02~10	DK35, DK35H	10Pcs / Pkt

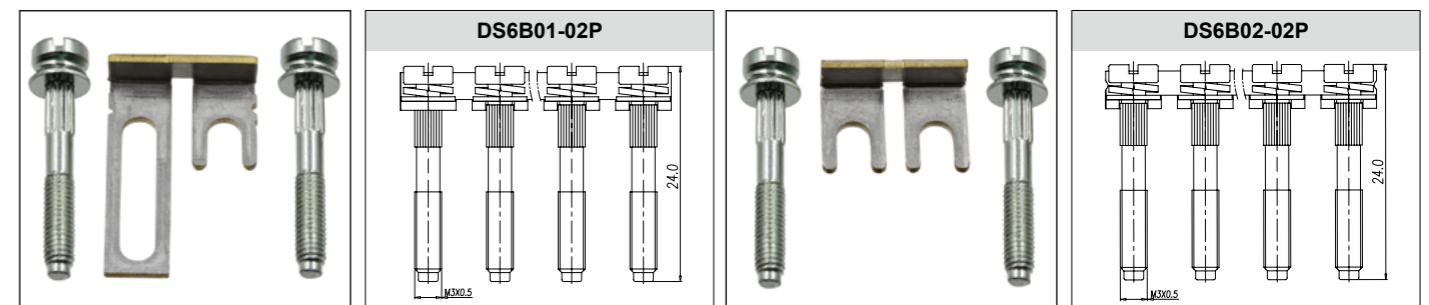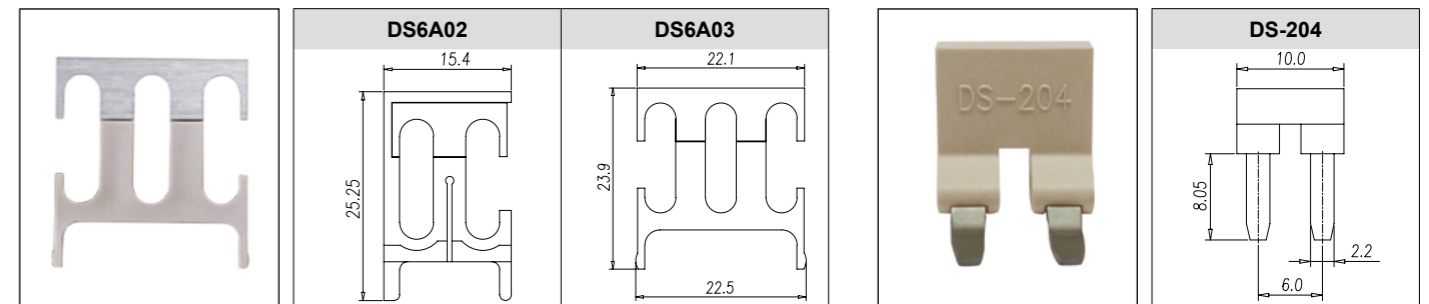


Part number	Position	For	package
DSD02-2.5XX-B	02~10	DK2.5, DK1.5-TR	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-4XX-B	02~10	D3KS2.5	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-6XX-B	02~10	DK6	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
DSD02-10XX-B	02~10	DK10	10Pcs / Pkt
DSD02-16XX-B	02~10	DK16, DK16H	10Pcs / Pkt


Cross Connection System

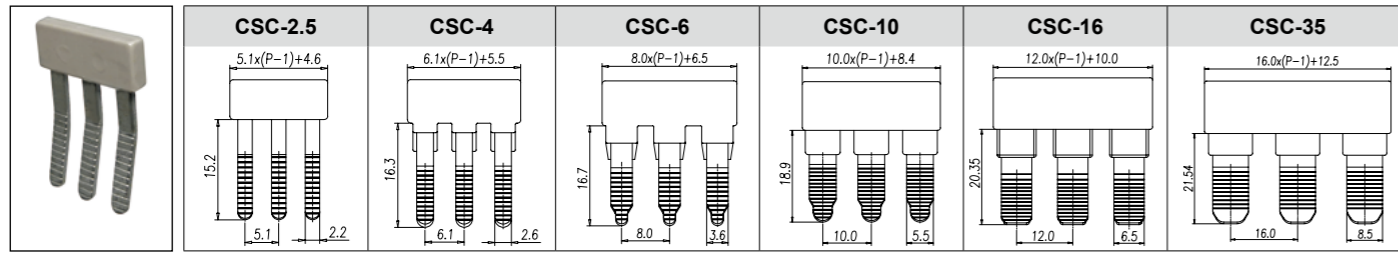


Part number	Position	For	package
CSC-2.5XXP	02~10	DK2.5, DKK2.5, DK1.5-TR, DK2.5-TG, DKES1.5, PM2.5W	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-4XXP	02~10	DK4, DKK4, DK4-TR, DK4-TR-TG	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-6XXP	02~10	DK6, DKTD6, DKTL6, DK6N, DK6D, DKTD6N	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-10XXP	02, 03, 04, 10	DK10	10Pcs / Pkt

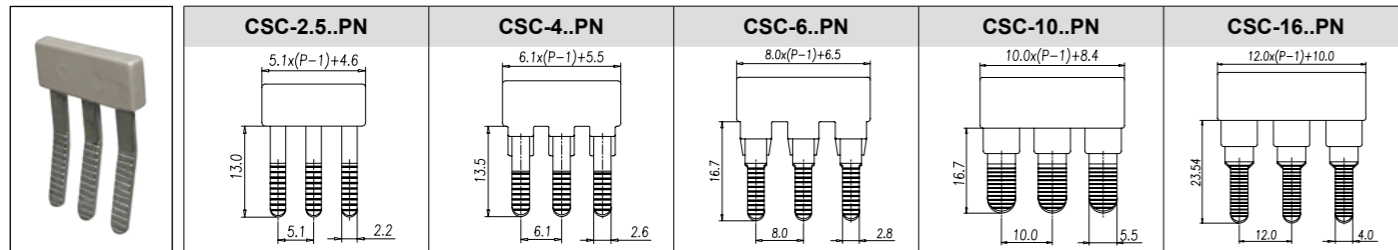

Part number	Position	For	package
CSC-2.5XXPN	02~10	DK2.5N, DK2.5N-TN, DK2.5N-TR, DK2.5D	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-4XXPN	02~10	DK4N, DK4N-TN, DK4N-TR, DK4D	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-6XXPN	02~10	DK4-TF	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-10XXPN	02~10	DK10N, DK10D	10Pcs / Pkt
CSC-16XXPN	02, 03, 10	DK10-TF	10Pcs / Pkt

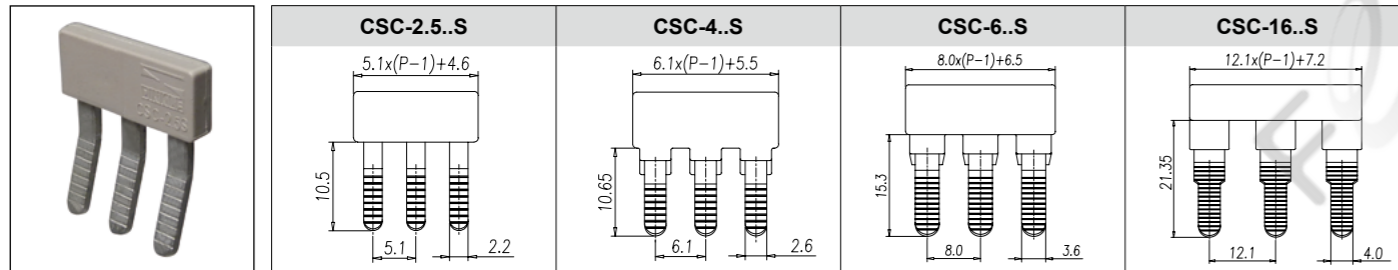


Part number	Position	For	package
CSC-2.5XXPS	02~10	DK2.5P, DK2.5S, PM2.5N-XXP	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-4XXPS	02~10	DK4, DK4S, PM4N-XXP	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-6XXPS	02~10	DK6P, DK6S, PM6N-XXP	2~4P / 50Pcs/Pkt, 5~10P / 10Pcs/Pkt
CSC-16XXPS	02~10	..	10Pcs / Pkt

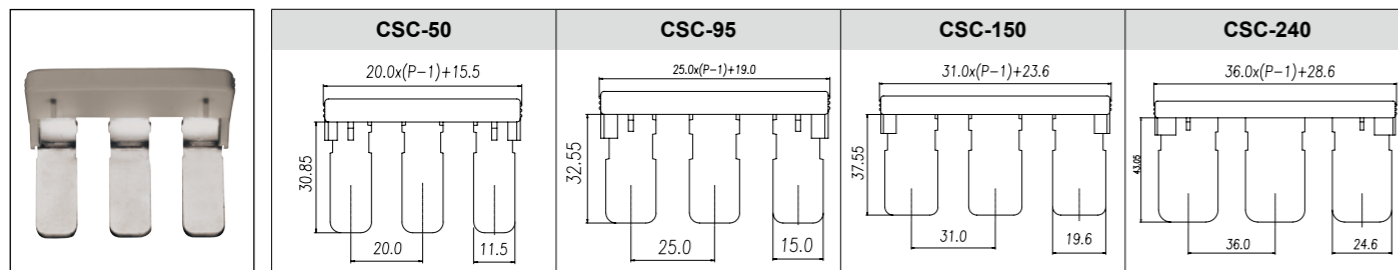


Part number	Position	For	package
CSC-50XXP	02~05	DK50	10Pcs/Pkt
CSC-95XXP	02, 03	DK90	10Pcs/Pkt
CSC-150XXP	02, 03	DK150	10Pcs/Pkt
CSC-240XXP	02, 03	DK240	10Pcs/Pkt

Cross Connection System

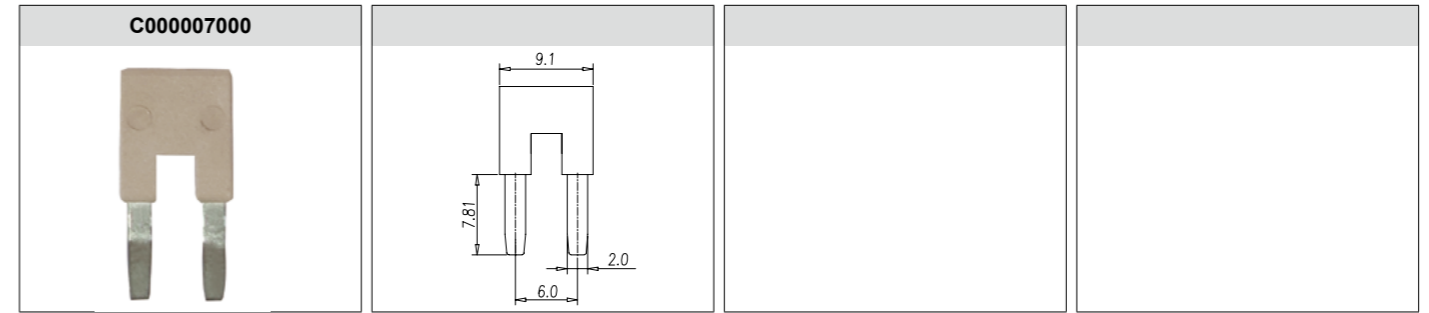


Part number	For	package
C000007000	AK2.P	50Pcs/Pkt

Cross Connection System

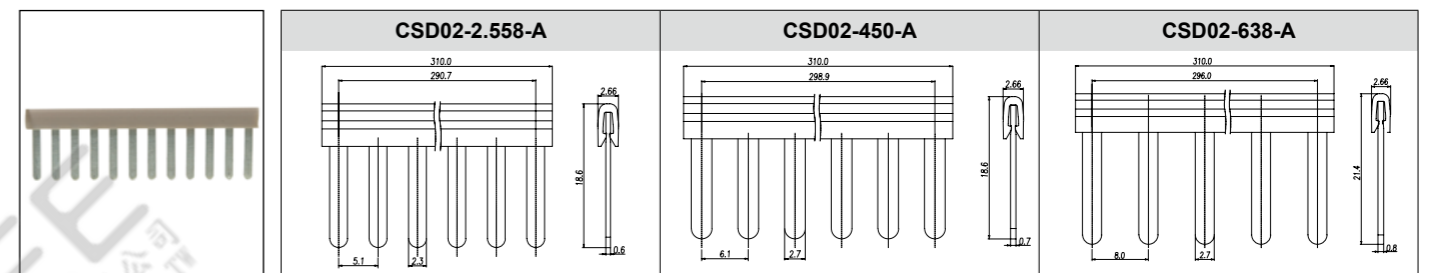



Part number	For	package
CSD02-2.558-A	DK2.5, DK2.5N, DK2.5N-TN, DK2.5N-TR	10Pcs / Pkt
CSD02-450-A	DK4, DK4N, DK4N-TN, DK4N-TR, DK4-TR	10Pcs / Pkt
CSD02-638-A	DK6, DK6N, DK4-TF(5x20), DKK4-TF(5x20), DKTD6, DKTL6	10Pcs / Pkt

Accessories


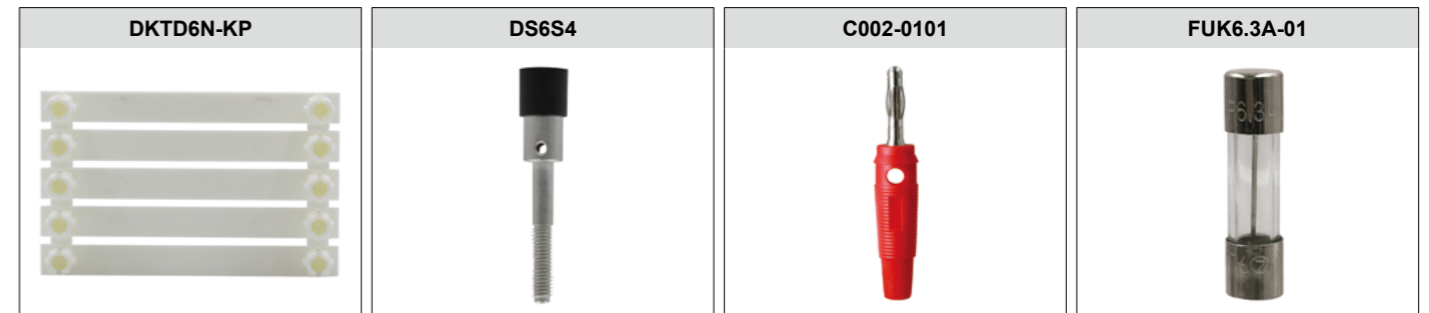


Part number	For	package
DKTD6N-KP	DKTD6N	50Pcs / Pkt
DS6S4	DKTD6N	50Pcs / Pkt
C002-0101	DKTD6N	50Pcs / Pkt
FUK6.3A-01	AK4-TF(5X20), DK4N-TF(5X20), DK4-TFL(5X20), DK4-TF(5X20)	50Pcs / Pkt

Busbar

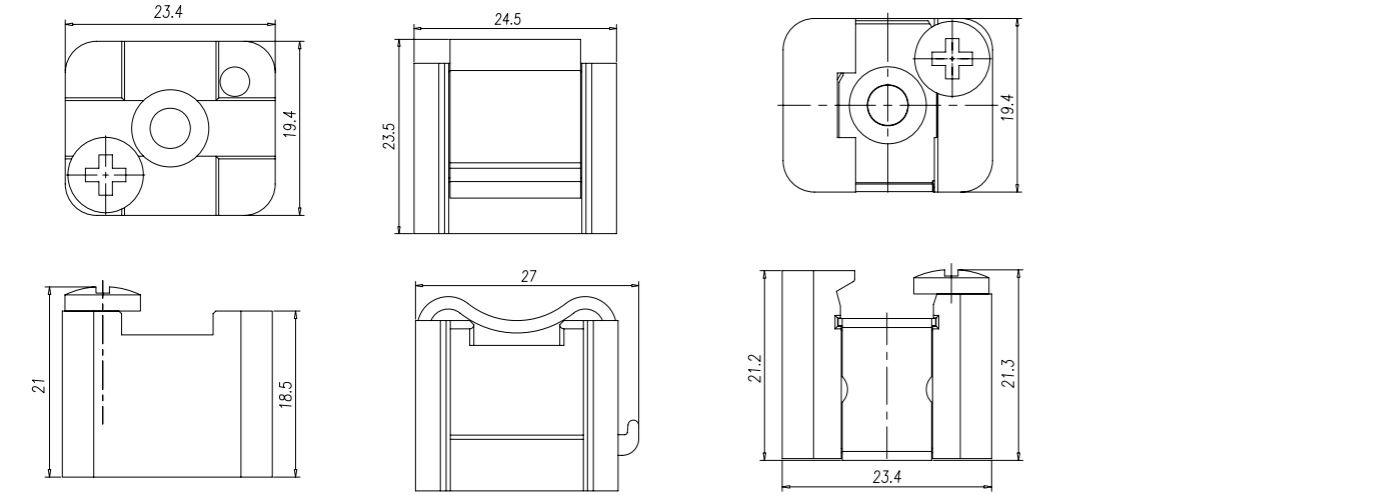
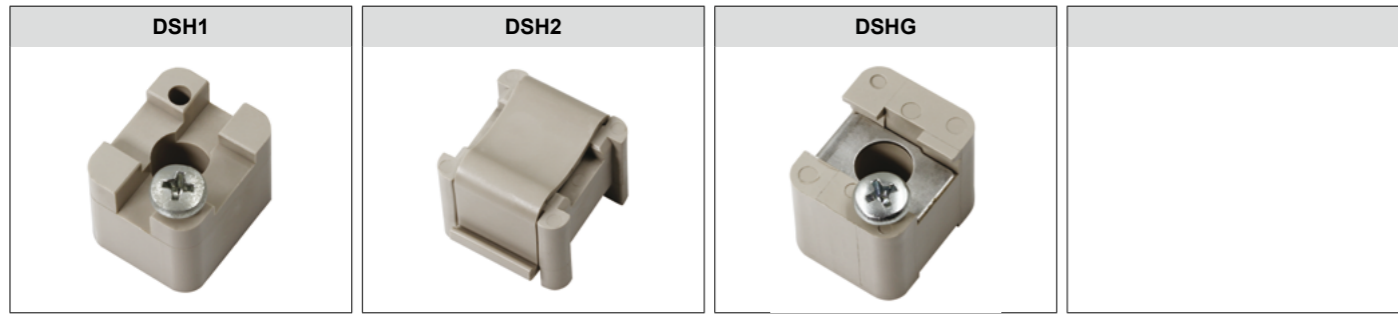


Part number	For	package
DSH1	DKZ4, DKZ4E, DKZ4E-YG, DKZ16, DKZ35, DKZ35A, DKZ70A, DKZ70B, DKZ120	50Pcs / Pkt
DSH2	DKZ4, DKZ4E, DKZ4E-YG, DKZ16, DKZ35, DKZ35A, DKZ70A, DKZ70B, DKZ120	50Pcs / Pkt
DSHG	DKZ4E-YG	50Pcs / Pkt

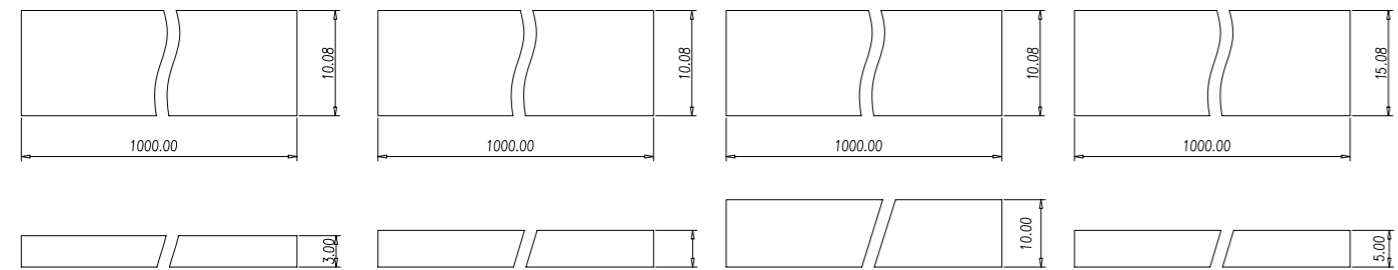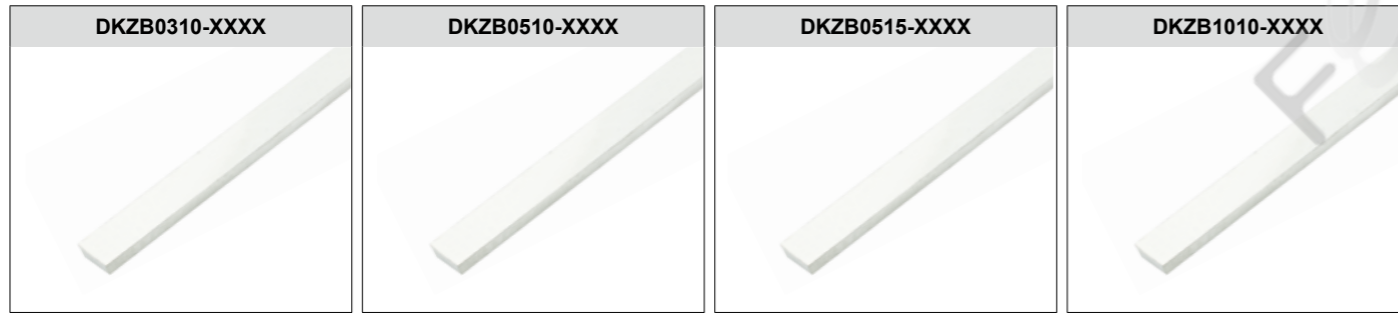

Part number	For	package
DSH1	DKZ4, DKZ4E, DKZ4E-YG, DKZ16, DKZ35, DKZ35A, DKZ70A, DKZ70B, DKZ120	50Pcs / Pkt
DSH2	DKZ4, DKZ4E, DKZ4E-YG, DKZ16, DKZ35, DKZ35A, DKZ70A, DKZ70B, DKZ120	50Pcs / Pkt
DSHG	DKZ4E-YG	50Pcs / Pkt


Accessories

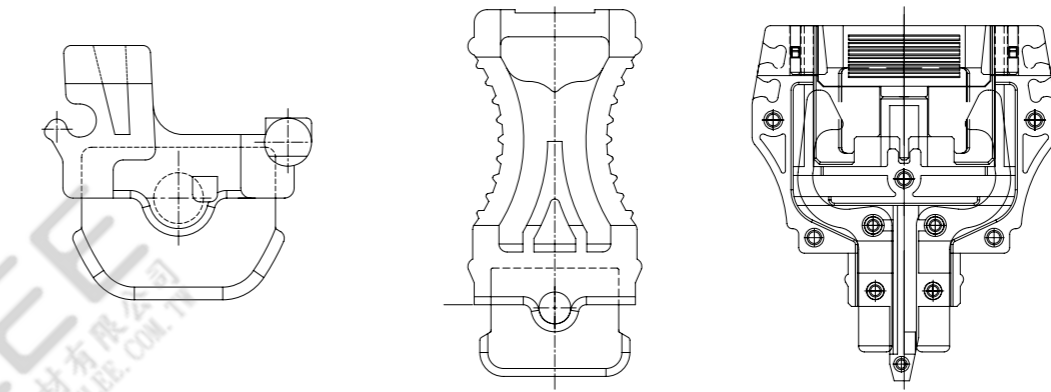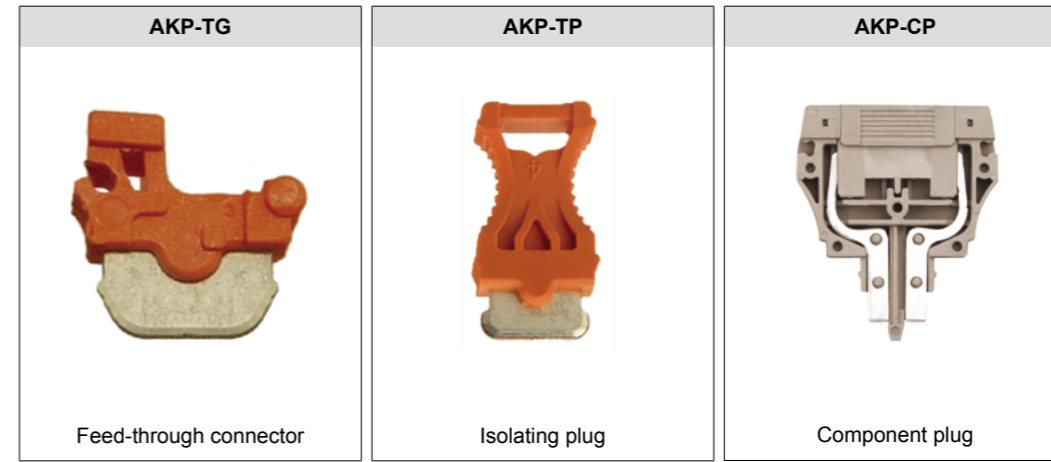

Part number	For	package
AKP-TP	AK2.5-TP, AK4-TP, AK2.5-TN-TP, AK2.5-TR-TP, DKK-2.5N-TP, DK2.5N-TP, DK4N-TP, DKK4N-TP	50Pcs / Pkt
AKP-TG	AK2.5-TG, AK4-TG, AK2.5-TN-TG, AK2.5-TR-TG, DK2.5N-TG, DK4N-TG, DKK2.5N-TG, DKK4N-TG	50Pcs / Pkt
AKP-CP	AK2.5-CP, AK4-CP, AK2.5-TN-CP, AK2.5-TR-CP, DK2.5N-CP, DK4N-CP, DKK2.5N-CP, DKK4N-CP	50Pcs / Pkt

AKP-CP Installation


Step 1 : The diode is inserted into the diode holder.





Step 2 : The two terminals of the diode are bended towards the center of the holder.




Step 3 : The diode holder is assembled back to the component plug.




Accessories

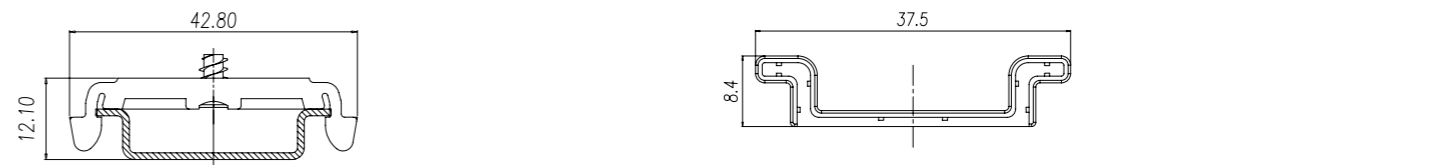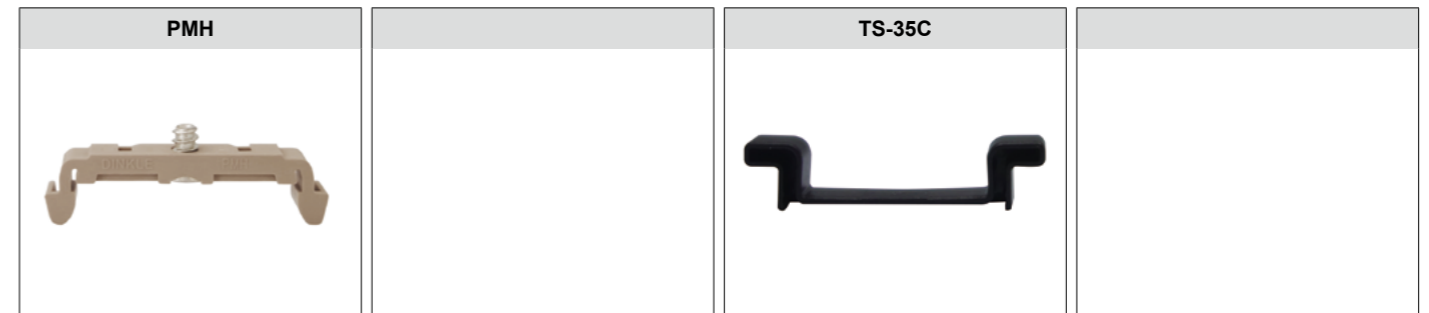

Part number	For	package
PMH	PM2.5N, PM4N, PM6N, PM2.5WS, PM2.5WSA, PMM2.5WS, PMM2.5WSA, PM2.5W, PMM2.5W	50Pcs / Pkt
TS-35C	TS-35	50Pcs / Pkt

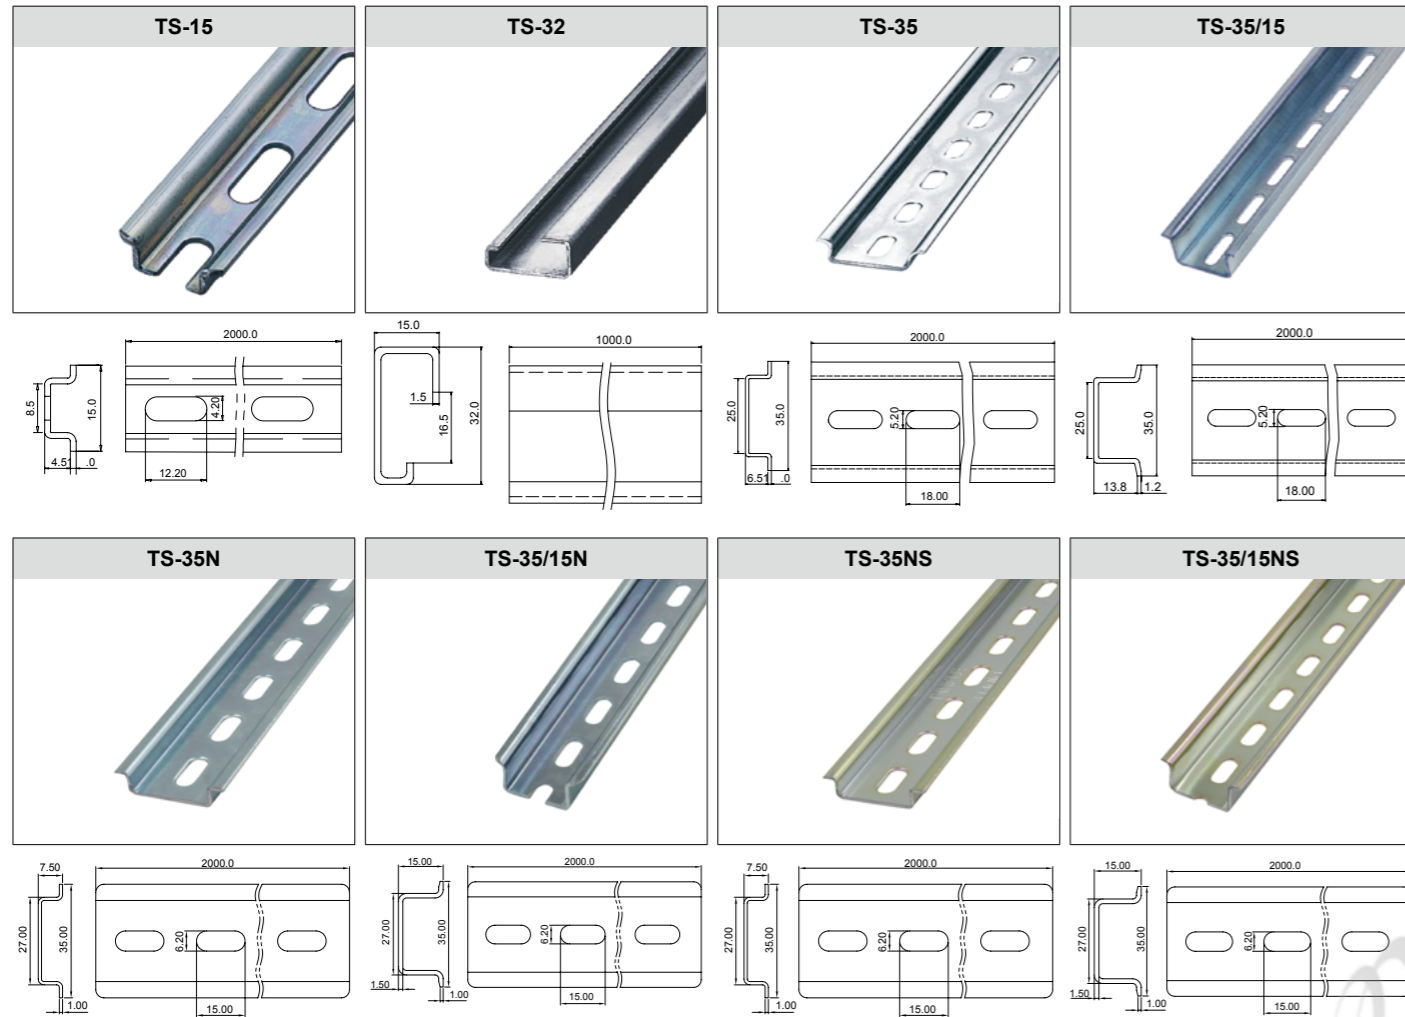

Part number	For	package
TS-15	DK..S	20Pcs / Pack
TS-32	DK, DK-PE	20Pcs / Pack
TS-35	DK, DK-PE, AK, AK-PE, AK..P, DP, DP-PE	20Pcs / Pack
TS-35/15	DK, DK-PE	10Pcs / Pack
TS-35N	DK, DK-PE, AK, AK-PE, AK..P, DP, DP-PE	20Pcs / Pack
TS-35/15N	DK, DK-PE	10Pcs / Pack
TS-35NS	DK, DK-PE, AK, AK-PE, AK..P, DP, DP-PE	20Pcs / Pack
TS-35/15NS	DK, DK-PE	10Pcs / Pack

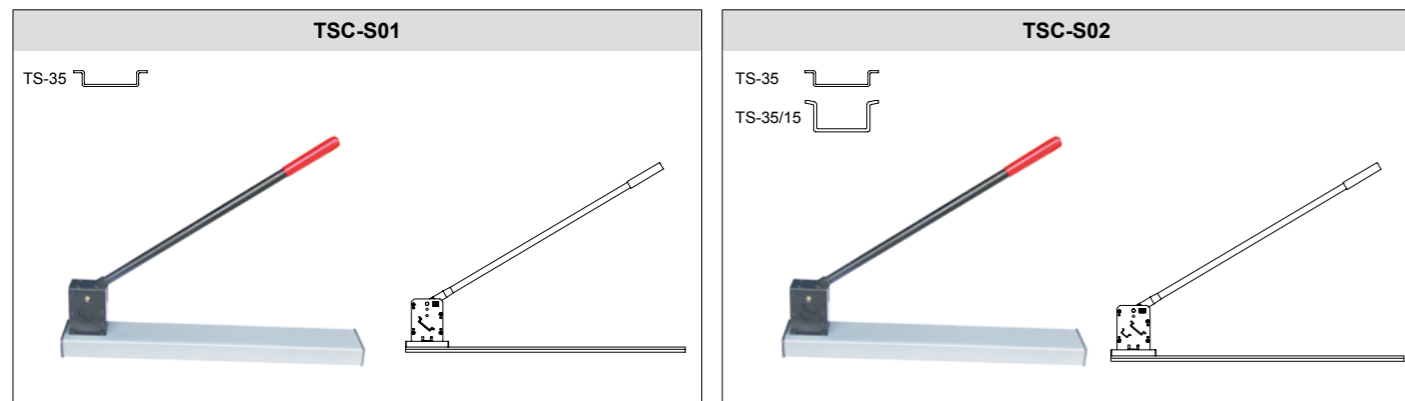


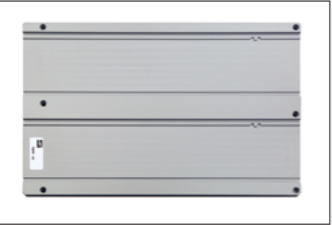

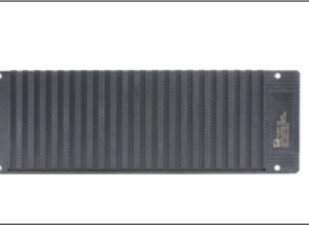
Part number	For	package
TSC-S01	TS-35	1Pcs / Pkt
TSC-S02	TS-35, TS-35 / 15	1Pcs / Pkt

Marking System



- The marking system makes labeling quick and easy.
- From planning to printing, entire work can be done in a few simple steps.
- Marking labels are available in various sizes for different ranges of terminal blocks.





Plotter & Accessories

Plotter set		Support plate		Support plate		Support plate	
							
Part number	Pc / box	Part number	Pc / box	Part number	Pc / box	Part number	Pc / box
TMP-SET	1	TMPF-01	1	TMPF-02	1	TMPF-02	1





Product Description	Product Description	Product Description	Product Description
Plotter system kit including plotter pen, plastic support plate for marking label, ink cartridge, power supply and plotter.	TM marking labels can be placed on the support plate.	For TM series marking label.	For TBZB marking label.

Refillable plotter pen		Plotter pen fixture		Ink bottle 23ml	
					
Part number	Pc / box	Part number	Pc / box	Part number	Pc / box
TMPP-04 (0.2mm)	1	TMPB-01	1	TMPK-03	1

Product Description	Product Description	Product Description
Plotter pen which can be manually refilled.	For TMPP-04.	Quick dry ink. For TMPP-04.


Disposable plotter pen		Refillable plotter pen		Ink cartridge 1ml		Ink bottle 30ml	
							
Part number	Pc / box	Part number	Pc / box	Part number	Pc / box	Part number	Pc / box
TMPP-11 (0.25mm) TMPP-12 (0.35mm) TMPP-13 (0.50mm)	1 1 1	TMPP-01 (0.25mm) TMPP-02 (0.35mm) TMPP-03 (0.50mm)	1 1 1	TMPK-01	1	TMPK-02	1

Product Description	Product Description	Product Description	Product Description
Non-refillable plotter pen, for quick drying applications.	Plotter pen which can be manually refilled.	For TMPP-0X ink cartridge replacement.	Quick dry ink. Storing temperature at 5°C or below.


Cleaning set		Suction ball		Cleaning fluid 30ml		Cleaning fluid 10ml	
							
Part number	Pc / box	Part number	Pc / box	Part number	Pc / box	Part number	Pc / box
TMPC-01	1	TMPC-02	1	TMPC-03	1	TMPC-04	2

Product Description	Product Description	Product Description	Product Description
Cleaning fluid cartridges 10ml x 2 + Cleaning fluid 30ml bottle.	Suction ball to prime plotter, plotter pen.	Cleaning fluid in a bottle.	Cleaning fluid in a cartridge.

Marking Label

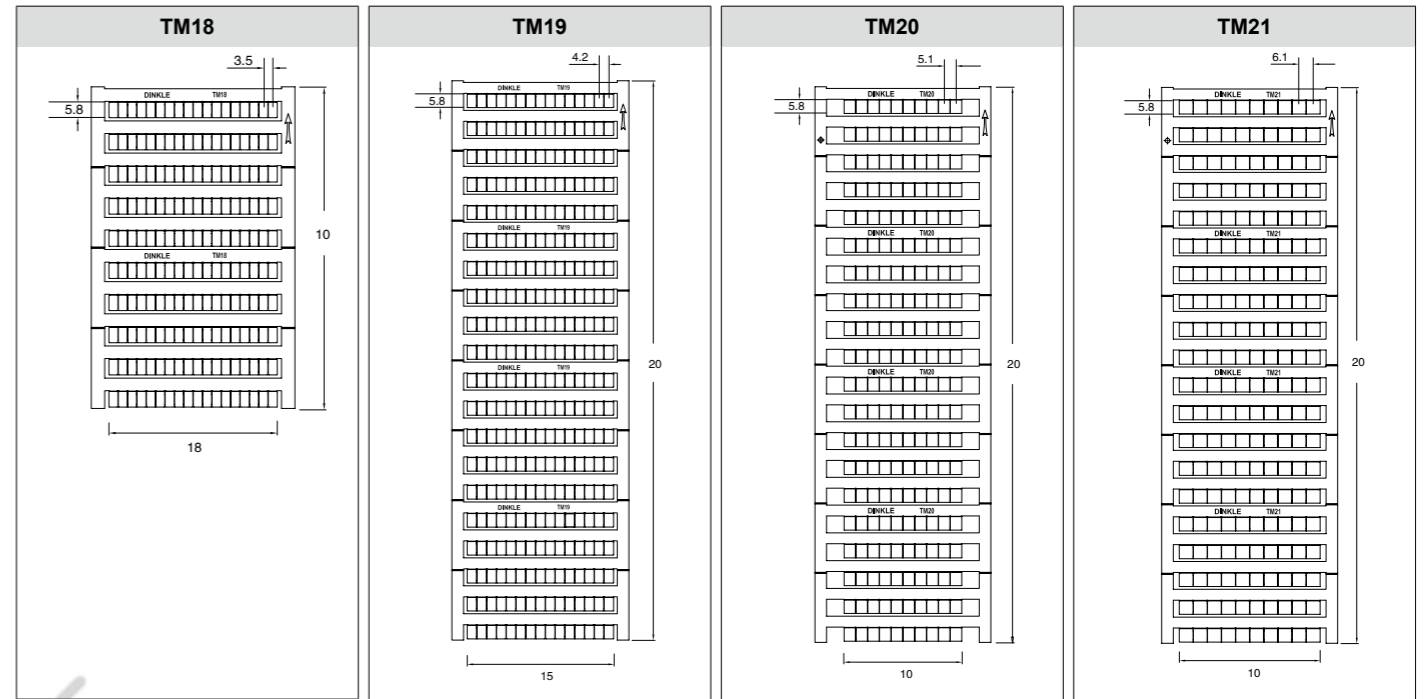


Part number	Width	Length	Total number of tabs on each marking label	Pcs / box
TM18	3.5	5.8	18X10=180	10
TM19	4.2	5.8	15x20=300	10
TM20	5.1	5.8	10x20=200	10
TM21	6.1	5.8	10x20=200	10

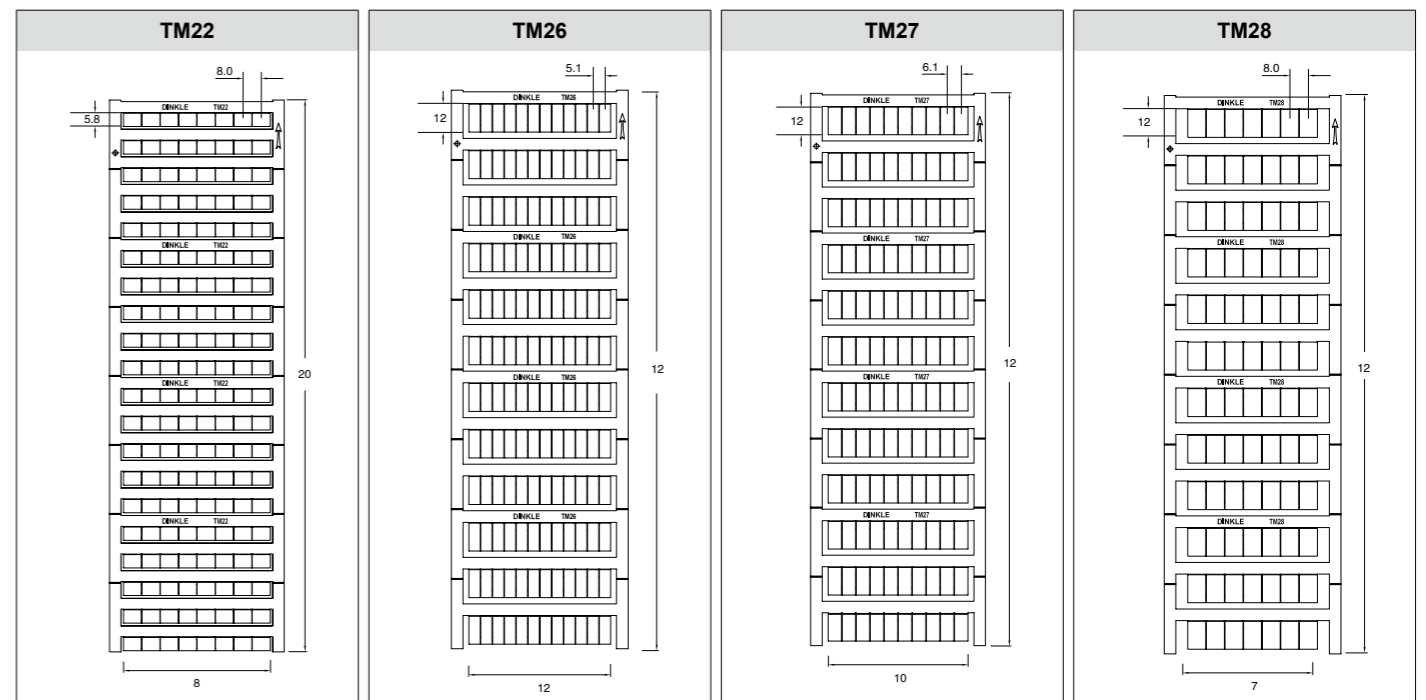


Part number	Width	Length	Total number of tabs on each marking label	Pcs / box
TM22	8.0	5.8	8X20=160	10
TM26	5.1	12	12x12=144	10
TM27	6.1	12	10x12=120	10
TM28	8.0	12	7x12=84	10

Marking Label

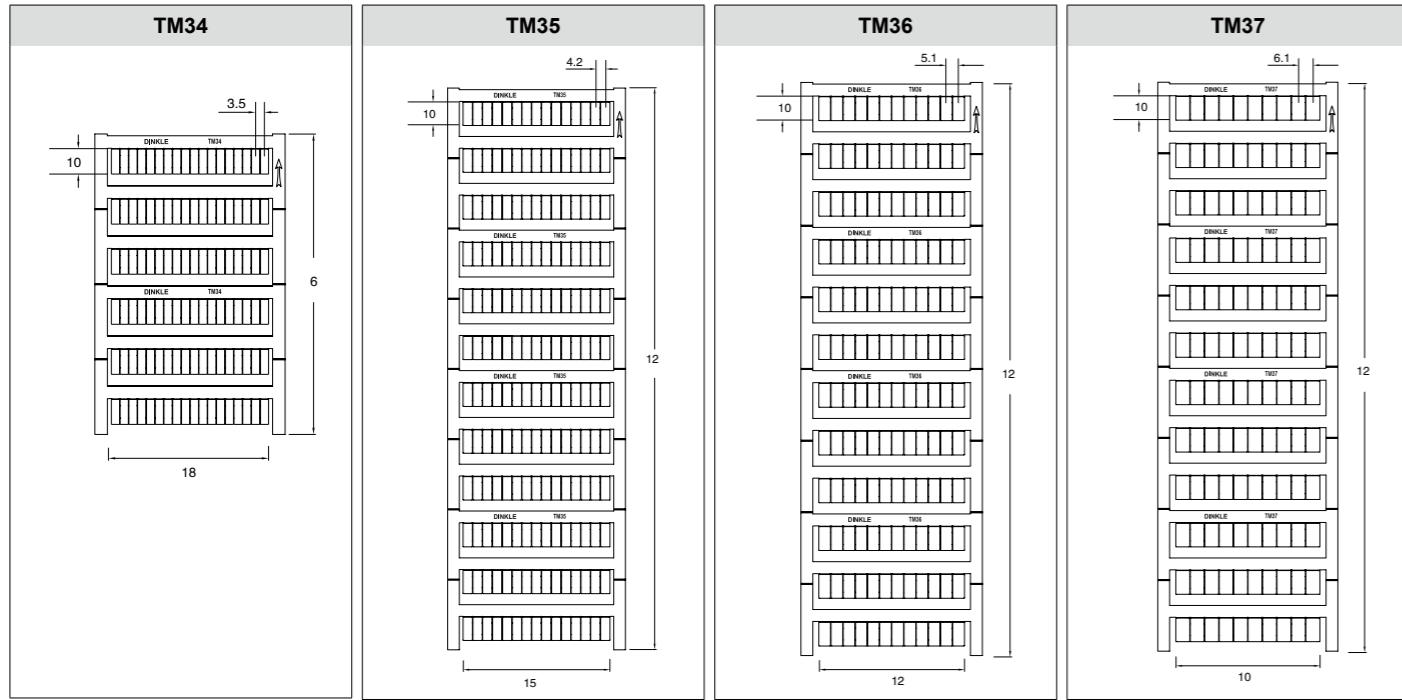

Part number	Width	Length	Total number of tabs oc each marking label	Pcs / box
TM34	3.5	10	18x6=108	10
TM35	4.2	10	15x12=180	10
TM36	5.1	10	12x12=144	10
TM37	6.1	10	10x12=120	10

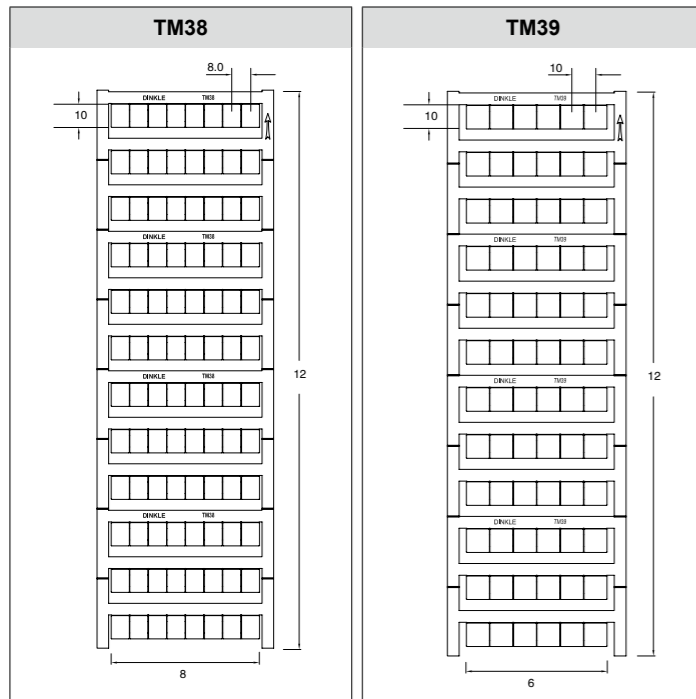

Part number	Width	Length	Total number of tabs oc each marking label	Pcs / box
TM38	8.0	10	8x12=96	10
TM39	10	10	6x12=72	10

Reference Table : Marking Label for DIN Rail Terminal Blocks

TM - XXX

Marking contents (A, B, C.....Z: 00,01,02,03.....98,99)
 Color code (K: Black R: Red X: Yellow G: Green L: Blue N: Orange M: Grey W: White)
 Marking label specification (07, 08, 09.....14, 26, 27, 28)

Part number	TM18	TM19	TM20	TM21	TM22	TM26	TM27	TM28	TM34	TM35	TM36	TM37	TM38	TM39	For
Length	5.8	5.8	5.8	5.8	5.8	12	12	12	10	10	10	10	10	10	
Width	3.5	4.2	5.1	6.1	8	5.1	6.1	8	3.5	4.2	5.1	6.1	8	10	
															AKK1.5
															DK2.5S, DK2.5P, DKK2.5, PM2.5N, PM2.5W, AK2.5P, AKK2.5, DPP2.5-PE
															DK4S, DK4P, DKK4, DK4-TR, DK4-TR-TG, DK2.5SG, DK2.5SG-PE, PM4N, RET4D-..., RET4U-..., AKK4, DPP4-PE, DK2.5-SG, DK2.5-SG-PE
															DK10-TF(5X20), DK10-TFA(5X20)
															DK2.5N, DK2.5N-PE, DK2.5D, DK2.5, DK2.5-PE, DK1.5-TR, DK2.5-TR-TG, DK2.5N-TN, DK2.5N-TR, DKK2.5N
															DKES1.5, DKES1.5LED, DKES1.5M
															DK4N, DK4-PE, DK4D, DK4, DK4N-PE, DK4N-TN, DK4N-TR, DKK4N
															DK6S, DK6N, DK6N-PE, DK6D, DK6P, DK6, DKTL6 ,DKTD6, DK4-TF(5X20), DK4-TFLD(5X20), PM6N, DK4N-TF(5X20)
															DK10N, DK10D, DK10, DK10-PE, DK10N-PE
															DK16H, DK16-PE, DK16N
															DK35H, DK35-PE, DK35N
															DK50, DK50-PE
															DK95, DK95-PE
															DK150
															DK240
															PMM2.5WS, PMM2.5WSH, PMM2.5W, AK2.5PP, PM2.5WSH, PM2.5WS, PM2.5WSA
															PPAC-4, PPAC-4R
															PPAC-10, PPAC-10R
															PPACN-4, PPACNV-4
															PPACN-10, PPACN-10Z, PPACNV-10, PPACNV-10Z, PPACN-10AS, PPACNV-10AS
															PPAC-16, PPACV-16, PPAC-16Z, PPAC-16AS, PPAC-25, PPAC-25AS
															PPAC-50, PPAC-50AS, PPAC-95, PPAC-95M, PPAC-95AS, PPAC-95MAS
															AK1.5, AK1.5-TR, AK1.5-TN, AK1.5-PE
															AK2.5, AK2.5-TR, AK2.5-TN, AK2.5-PE, DP2.5, DP2.5-PE, DP2.5-TN, DP2.5-TR, DPP2.5, DP2.5-TN-PE, DP2.5-TR-PE, DP2.5-3L
															AK4, AK4-TR, AK4-TN, AK4-PE, DP4, DP4-PE, DP4-TN, DP4-TR, DPP4, DP4-TN-PE, DP4-TR-PE
															AK6, AK6-TN, AK6-TR, AK6-PE, DP6, DP6-TN, DP6-PE, DP6-TN-PE, DP6-TR-PE
															AK10, AK10-TN, AK10-PE, AK10-TN-PE, DP10, DP16, DP10-PE
															AK16, AK16-TN, AK16-PE
															AK35
															DP1.5, DP1.5-TR, DP1.5-PE, DP1.5-TN

Ferrules & Tools



Features of Dinkle Screwdrivers :

- The quality alloy material withstand high torque value prevents the screwdriver from breaking when it is overstressed.
- Meets the DIN, ISO and ANSI standards.
- PP and TPV materials of the handle avoid slippery and provide resistance to chemical, oil and most solvents.
- Blade made of special high quality SVCM steel alloy, through hardening treatment.
- Streamlined handle design fits your hand comfortably for a firm grip.

Self Adjustable Crimping Pliers

- ◆ Self-adjustable to suit the wire size.
- ◆ Square crimp, four sets of jagged surface for crimping.
- ◆ Cross section : 0.08~ 10mm² / AWG 28 ~ 7
- ◆ Specially mechanically designed for maximum crimping force and save up to 40% manpower.

Package



High flexibility spring material

Using hardened steel with high flexibility, and durability.

Handle

Rubber handle with antislip design in PVC material improved gripping comfort.

Square shape

Square crimping pliers, unique design for secure crimping, easy to use.

Precision crimping

Appropriate pressure is applied to crimp the ferrules without damaging it.

⊖ Slotted Screwdriver

⊕ Phillips Screwdriver




Part number	A	B	D	Pcs / bos	Pcs / carton
DNT11-0102	0.4	2.5	75	12	600
DNT11-0107	0.6	3.5	100	12	600
DNT11-0109	0.8	4.0	100	12	600
DNT11-0111	1.0	5.5	150	12	240



Part number	C	D	Pcs / bos	Pcs / carton
DNT11-0201	#0 / 3.0	60	12	600
DNT11-0202	#1 / 5.0	80	12	240
DNT11-0205	#2 / 6.0	100	12	180
DNT11-0208	#3 / 8.0	150	6	96


Ferrule For Single Wire

Diameter AWG (mm ²)	Part number	Package		Size(mm)				DIN 46228/4 color
		Pcs / bag	Pcs / box	D1	D2	L1	L2	
24 (0.25)	DN00206D	1000	10	0.75	1.9	6	10	● Light Blue
	8					12		
22 (0.34)	DN00306D	1000	10	0.8	1.9	6	10	● Turouise
	8					12		
20 (0.5)	DN00506D	500	10	1.0	2.6	6	10	○ White
	8					14		
18 (0.75)	DN00510D	500	8	1.2	2.8	10	16	● Grey
	12					12		
	14					14		
	16					16		
(1)	DN00710D	500	6	1.4	3.0	18	18	● Red
	10					16		
	12					18		
	14					18		
16 (1.5)	DN01006D	500	4	1.7	3.5	8	14	● Black
	10					16		
	12					18		
	18					24		
14 (2.5)	DN01508D	500	3	2.2	4.2	8	14	● Blue
	10					16		
	12					18		
	18					24		
12 (4)	DN02512D	500	2	2.8	4.8	10	17	● Grey
	12					20		
	18					26		
10 (6)	DN04010D	500	1	3.5	6.3	12	20	● Yellow
	18					26		
7 (10)	DN06012D	200	1	4.5	7.6	12	22	● Red
	18					28		
5 (16)	DN10012D	200	1	5.8	8.8	12	22	● Blue
	18					28		
4 (25)	DN16012D	100	1	7.3	11.2	16	30	● Yellow
	18					30		
	22					36		
2 (35)	DN25016D	100	1	8.3	12.7	16	30	● Red
	18					32		
	25					39		
1 (50)	DN35016D	50	1	10.3	15.0	20	36	● Blue
	25					40		
2 / 0 (70)	DN50020D	50	1	13.5	16.0	21	37	● Yellow
3 / 0 (95)	DN70021D	50	1	14.7	18.0	25	44	● Red
4 / 0 (120)	DN95025D	20	1	16.7	20.0	27	48	● Blue
250kcmil (150)	DN97032D	20	1	19.5	23.0	32	58	● Yellow

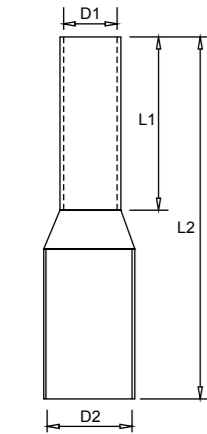

Ferrule For Double Wire

Diameter AWG (mm ²)	Part number	Package		Size(mm)				DIN 46228/4 color
		Pcs / bag	Pcs / box	D1	W / D2	L1	L2	
2X0.50	DN00508B	500	5	1.5	2.5 / 4.7	8.0	15.0	○ White
2X0.75	DN00708B	500	5	1.8	2.8 / 5.0	8.0	15.0	● Grey
	10.0					17.0		
2X1.00	DN01008B	500	4	2.05	3.4 / 5.4	8.0	15.0	● Red
	10.0					17.0		
2X1.50	DN01508B	500	2	2.3	3.6 / 6.6	8.0	16.0	● Black
	12.0					20.0		
2X2.50	DN02510B	500	1	2.8	4.2 / 7.8	10.0	18.5	● Blue
	13.0					21.5		
2X4.00	DN04012B	200	2	3.7	4.9 / 8.8	12.0	23.0	● Grey
2X6.00	DN06014B	200	1	4.8	6.9 / 10.0	14.0	26.0	● Yellow
2X10.00	DN10014B	50	2	6.4	7.6 / 12.8	14.0	26.5	● Red
2X16.00	DN16014B	50	2	8.3	9.6 / 18.6	14.0	31.5	● Blue



Ring Terminal

Diameter AWG (mm ²)	Part number	Package		Size(mm)							DIN 46228/4 color
		Pcs / bag	Pcs / box	Ød2	B	F	L	H	ØD	T	
22~16 (0.5~1.5)	DNH1-132	1000	1	3.2	5.5	4.75	17.0	9.5	4.0	0.75	● Red
	DNH1-137	1000	1	3.7	5.5	4.75	17.0				
	DNH1-137B			3.7	6.6	6.3	19.1				
	DNH1-143	1000	1	4.3	6.6	6.3	19.1				
	DNH1-143B			4.3	8.0	7.0	20.5				
	DNH1-153	1000	1	5.3	8.0	7.0	20.5				
16~14 (1.5~2.5)	DNH1-164	200	2	6.4	11.6	9.7	25.0	10.0	4.5	0.8	● Blue
	DNH1-184	200	2	8.4	11.6	9.7	25.0				
	DNH1-110	200	1	10.5	14.0	12.0	28.5				
	DNH1-232	1000	1	3.2	6.4	4.3	17.5				
	DNH1-237	1000	1	3.7	6.4	4.3	17.5				
	DNH1-237B	500	1	3.7	8.5	7.75	22.0				
	DNH1-243	1000	1	4.3	6.6	6.3	19.6				
	DNH1-243B	500	1	4.3	8.5	7.75	22.0				
	DNH1-253	200	2	5.3	9.5	7.25	22.0				
	DNH1-264	200	1	6.4	12.0	11.0	27.0				
	DNH1-284	200	1	8.4	12.0	11.0	27.0				
	DNH1-210	200	1	10.5	14.0	12.0	29.0				
12~10 (4~6)	DNH1-537	500	1	3.7	7.2	5.9	22.5	13.0	6.8	1.0	● Yellow
	DNH1-543	200	2	4.3	9.5	8.25	26.0				
	DNH1-553	200	2	5.3	9.5	8.25	26.0				
	DNH1-564	200	1	6.4	12.0	10.5	29.5				
	DNH1-584	200	1	8.4	15.0	13.5	34.0				
	DNH1-510	200	1	10.5	15.0	13.5	34.0				



Ferrule Protection Cover


Part number : 0211C1XX00

For ferrule types :
DN00506D / DN00508D / DN00510D

$V=U+5.1$
 $U=7.00X(P/2-1)(Pmax=22)$

Fork Terminal

Diameter AWG (mm ²)	Part number	Package		Size(mm)							DIN 46228/4 color
		Pcs / bag	Pcs / box	Ød2	B	F	L	H	ØD	T	
22~16 (0.5~1.5)	DNH2-137	1000	1	3.7	5.7	6.5	20.7	9.5	4.0	0.75	● Red
	DNH2-137B			3.7	6.4	6.5	20.7				
	DNH2-143	1000	1	4.3	6.4	6.5	20.7				
	DNH2-143B			4.3	7.2	6.5	20.7				
	DNH2-153	500	1	5.3	8.1	6.5	20.7				
	DNH2-164	200	2	6.4	11.0	10.0	25.0				
16~14 (1.5~2.5)	DNH2-237	500	1	3.7	5.7	6.5	21.2	10	4.5	0.8	● Blue
	DNH2-237B			3.7	6.4	6.5	21.2				
	DNH2-243	500	1	4.3	6.4	6.5	21.2				
	DNH2-243B			4.3	7.2	6.5	21.2				
	DNH2-253	200	2	5.3	8.1	6.5	21.2				
	DNH2-264	200	2	6.4	11.0	10.0	25.5				
12~10 (4~6)	DNH2-537	200	2	3.7	8.2	7.2	24.7	13	6.8	1.0	● Yellow
	DNH2-543	200	2	4.3	8.2	7.2	24.7				
	DNH2-553	200	2	5.3	9.0	7.2	24.7				
	DNH2-564	200	1	6.4	12.0	11.0	31.0				

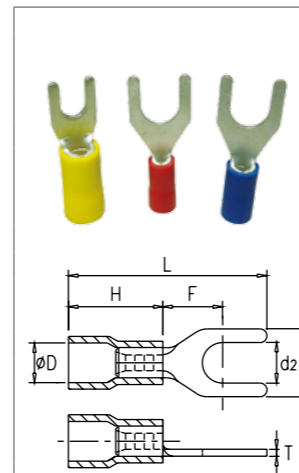

Cross-reference For Wire Gauge

AWG	30	28	26	24	22	20	18	16	14	12
Cross Section mm ²	0.05	0.08	0.13	0.20	0.32	0.52	0.82	1.30	2.10	3.30
Pulling Force kg(N)	0.22	0.46	0.91	1.37	2.04	3.06	3.06	4.08	5.10	6.12
AWG	10	8	6	4	3	2	1	1 / 0	2 / 0	
Cross Section mm ²	5.30	8.40	13.30	21.20	26.70	33.60	42.60	53.50	67.40	
Pulling Force kg(N)	8.16	9.18	9.60	13.60	16.00	19.00	24.10	29.10	29.10	

UL 468 E

U.S. regulations AWG	Standard mm ²	Solid wire Φ mm	Standed wire Φ mm	Ampere rating A
30	0.05	0.26	0.32	0.50
28	0.08	0.32	0.38	0.80
26	0.13	0.41	0.48	1.00
24	0.20	0.51	0.64	2.00
22	0.32	0.64	0.78	3.00
20	0.52	0.81	0.95	5.00
18	0.82	1.02	1.21	7.00
16	1.30	1.29	1.50	10.00
14	2.10	1.63	1.90	15.00
12	3.30	2.05	2.40	20.00
10	5.30	2.59	2.90	30.00
8	8.40	3.27	3.70	50.00
6	13.30	4.11	4.70	65.00
4	21.20	5.19	5.80	85.00
3	26.70	5.83	6.40	100.00
2	33.60	6.54	7.30	115.00
1	42.40	7.35	8.20	130.00
1 / 0	53.49	8.25	9.20	150.00
2 / 0	67.42	9.27	10.40	175.00
3 / 0	85.03	10.41	11.60	200.00
4 / 0	107.20	11.69	13.40	230.00

IEC 60947-7-1, IEC 60998-1

European regulations mm ²	Standard AWG	Solid wire Φ mm	Standed wire Φ mm	Standed wire Φ mm	Ampere rating A
-		-	-	-	-
-		-	-	-	-
-		-	-	-	-
0.20	24	0.51	0.53	0.61	4.00
0.34	22	0.63	0.66	0.80	5.00
0.50	20	0.90	1.10	1.10	6.00
0.75	18	1.00	1.20	1.30	9.00
1.00		1.20	1.40	1.50	13.50
1.50	16	1.50	1.70	1.80	17.50
2.50	14	1.90	2.20	2.30	24.00
4.00	12	2.40	2.70	2.90	32.00
6.00	10	2.90	3.30	3.90	41.00
10.00	8	3.70	4.20	5.10	57.00
16.00	6	4.60	5.30	6.30	76.00
25.00	4	5.70	6.60	7.80	101.00
35.00	2	6.70	7.90	9.20	125.00
-	-	-	-	-	
50.00	1	7.80	9.10	11.00	150.00
70.00	2 / 0	9.47	11.0	13.10	192.00
95.00	3 / 0	11.00	12.9	15.10	232.00