
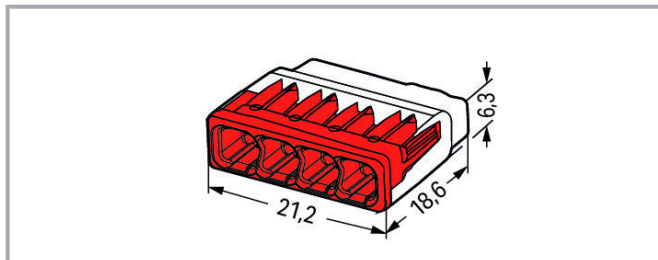


| : 2773-404

COMPACT ; ; 4 mm<sup>2</sup>; 4-; ; ; 85 °C (T85); 4,00 mm<sup>2</sup>;

[www.wago.com/2773-404](http://www.wago.com/2773-404)

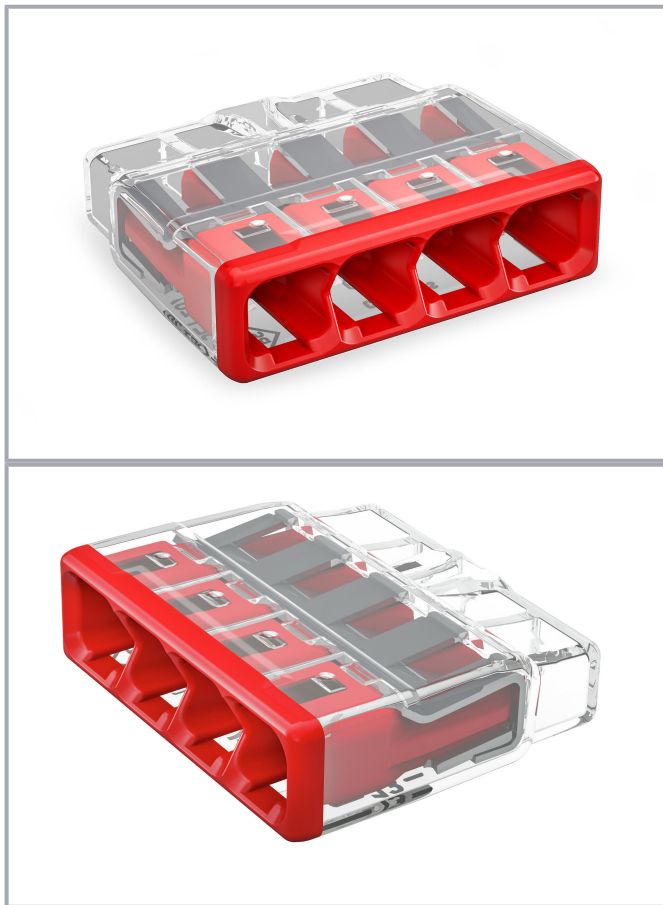

- 
- 8
- : 0.75 ... 4 mm<sup>2</sup> "s" 1.5 ... 4 mm<sup>2</sup> "st"
- 
- PUSH WIRE®

/

WAGO Contact, Ltd  
5F., No.168, Jiankang Rd  
Zhonghe City | Taipei County 23585, Taiwan  
Tel.: +886 2 22259755 | Fax: +886 2 22251511  
Email: [info.taiwan@wago.com](mailto:info.taiwan@wago.com)

+886 2 22250123



## IEC/EN

|          |                              |
|----------|------------------------------|
|          | IEC/EN 60998                 |
| (II / 2) | 450 V                        |
| (II / 2) | 4 kV                         |
|          | 32 A                         |
| 0        | (II / 2) $\triangleq$ II / 2 |

## UL

|        |         |
|--------|---------|
|        | UL 486C |
| UL (C) | 600 V   |
| UL (C) | 20 A    |

|  |                                |
|--|--------------------------------|
|  | PUSH WIRE®                     |
|  |                                |
|  |                                |
|  | 0.75 ... 4 mm² / 20 ... 12 AWG |
|  | 1.5 ... 4 mm² / 18 ... 12 AWG  |
|  | 1.6 ... 2 mm                   |
|  | 13 mm / 0.51                   |
|  | 4                              |
|  | 1                              |

|  |                      |
|--|----------------------|
|  | 21.2 mm / 0.835 inch |
|  | 6.3 mm / 0.248 inch  |
|  | 18.6 mm / 0.732 inch |

|             |       |
|-------------|-------|
| Cover color |       |
| UL 94       | V2    |
|             | 2.1 g |

/

|                                  |                 |
|----------------------------------|-----------------|
| 0                                | 85 °C           |
| Continuous operating temperature | -40 ... +105 °C |
| T-Marking per EN 60998           | T85             |
|                                  | BOX             |
|                                  | DE              |
| GTIN                             | 4055143918985   |
|                                  | 85369010000     |

/

Country specific Approvals

|                                                                                   |                                       |           |               |
|-----------------------------------------------------------------------------------|---------------------------------------|-----------|---------------|
|                                                                                   | CB<br>DEKRA Certification B.V.        | IEC 60998 | NL-<br>49187  |
|  | KEMA/KEUR<br>DEKRA Certification B.V. | EN 60669  | 71-<br>101844 |

UL-Approvals

|                                                                                     |                                      |        |                      |
|-------------------------------------------------------------------------------------|--------------------------------------|--------|----------------------|
|  | UL<br>Underwriters Laboratories Inc. | UL 467 | 20180215-<br>E201573 |
|-------------------------------------------------------------------------------------|--------------------------------------|--------|----------------------|

Mounting adapter

|                                                                                   |                                 |                                                                  |
|-----------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------|
|  | : 2773-500<br>;; 2773; TS35 / ; | <a href="http://www.wago.com/2773-500">www.wago.com/2773-500</a> |
|-----------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------|

Documentation

Additional Information

|                        |        |               |
|------------------------|--------|---------------|
| Technical explanations | 201943 | pdf<br>2.2 MB |
|------------------------|--------|---------------|


/

## Environmental Product Compliance


### Compliance Search

Environmental Product Compliance 2773-404  
COMPACT ; ; 4 mm<sup>2</sup>; 4-; ; ; 85 °C (T85); 4,00 mm<sup>2</sup>;


URL

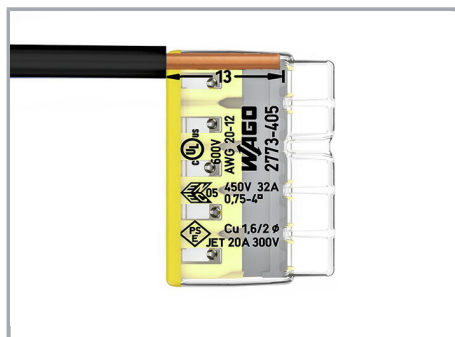


Strip solid or stranded conductor to 13 mm (0.51 inch).

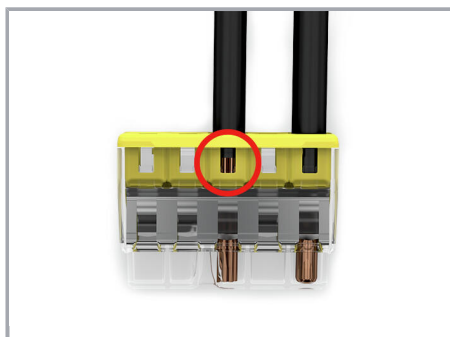


The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct. Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.

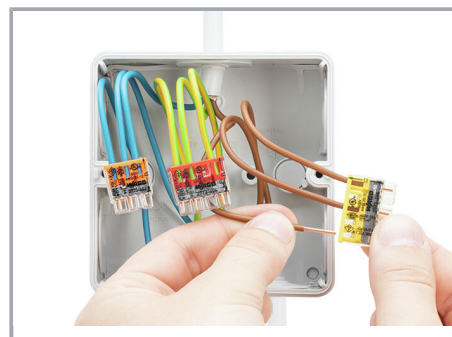


Termination: Insert the stripped conductor until it hits the backstop.

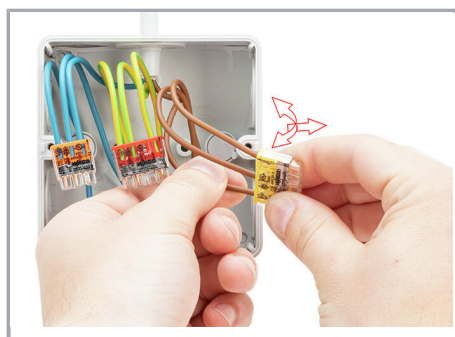

Removal: Hold solid conductor to be removed and twist alternately left and right while pulling the connector.

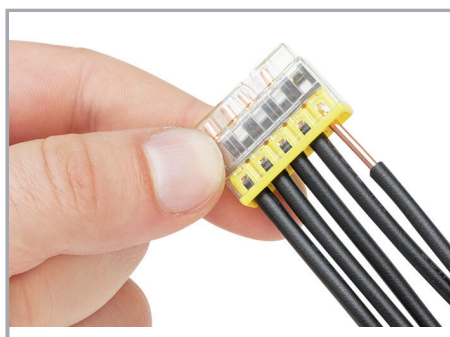

Solid conductors are inserted into the connector by simply pushing them in.

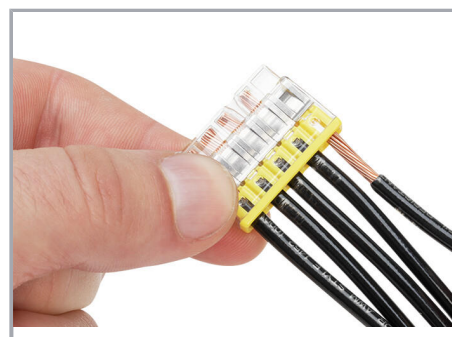


Stranded conductors are inserted into the connector by simply pushing them in.


/



Testing via test port opposite to conductor entry.

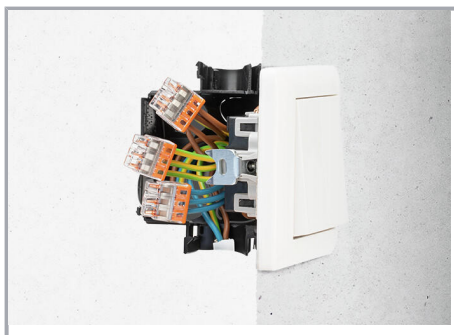

Thanks to their flat and compact design, these connectors are ideal for wiring in flush-mount switch boxes.

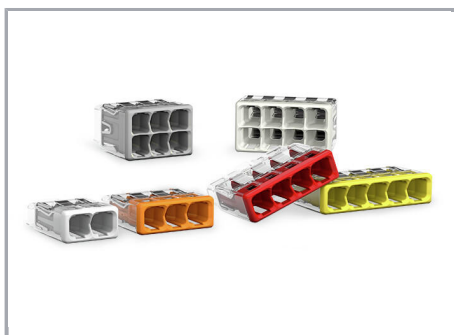

With six variants, always have the right connector.

/