



# Thousand Hundred Industrial Co., Ltd.



## AC Current Transformer 50/60Hz

### Split-Core Current Transformer

### CT24-6 Series


top-th@thic.net

RoHS Compliant  
CE/UL- Approved


Part Number	Electrical Characteristic				Photo	
	Current Ratio MAX	Accuracy Class(%)	Turns Ratio (Np:Ns)	RL		
CT246100XX	600A/600mA	0.5	1:1000	10Ω	 	
CT246150XX	600A/400mA	0.5	1:1500	10Ω		
CT246200XX	600A/300mA	0.5	1:2000	10Ω		
CT246250XX	600A/240mA	0.5	1:2500	10Ω		
CT246300XX	600A/200mA	0.5	1:3000	10Ω		
CT246400XX	600A/150mA	0.5	1:4000	10Ω		
CT246500XX	600A/120mA	0.5	1:5000	10Ω		Secondary Terminal L: Lead Wires
CT246600XX	600A/100mA	0.5	1:6000	10Ω		
CT246XXXXX	600A/XXXmA	0.5~10	Customer designed	10Ω		

Minimum Input Current: from 30A

Maximum Input Current: up to 720A

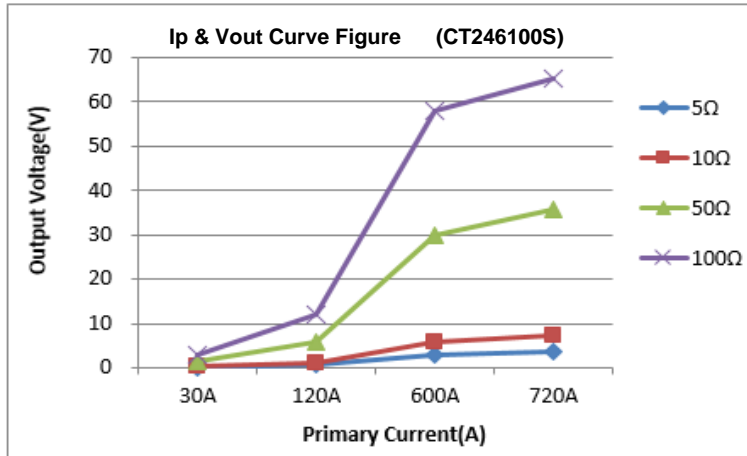

### Mechanical Dimensions in mm

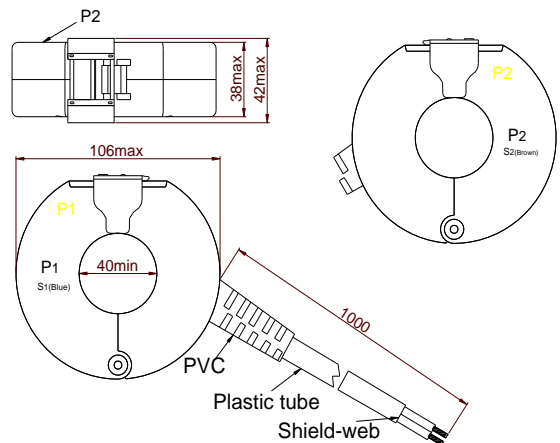

### Test Circuit:

